

## EF NEXT SL

The Essential, Easy and Safe blast chiller choice



EasyFresh® NEXT blast chillers are the most cost-effective blast chillers in the industry. IRINOX blast chillers rapidly cool foods to 37°F or shock freeze foods to 0°F at the core. This includes hot foods just removed from the heat source. The operating principle of a blast chiller is to extract the heat from the food in the shortest possible time. EasyFresh® Next guarantees ultra-rapid blast chilling and shock freezing to preserve the flavor, colors, textures, aromas, moisture and nutritional value, preserving its yield, quality and freshness longer over time.

### Capacity

Number of steam table pans (8): 12"x20"x2.5"

Number of sheet pans (5): 18"x26"

### Yield

Rapid blast chilling cycle capacity (+194°F / +37°F) 39lb

Rapid freezing cycle capacity (+194°F / 0°F) 33lb

\*Note: Thinner foods may allow more sheet pan capacity.  
Tests carried out in compliance with the IRINOX procedure using 2" thick food products

### Product Warranty Protection

- 2 years, parts and labor.
- 5 years, compressor.

### Certification



### Standard Construction Details

- Unit comes with 2 wire shelves, and 5 sets of angle slides.
- Core probe magnetically secures to door when not in use.
- Door opening on the left with hinges on the left (standard).
- Door with swing closure.
- Core probe with 1 sensing point.
- IRINOX BALANCE SYSTEM®, is a design system created by IRINOX and applied to the whole range of blast chillers. Compressor, condenser, evaporator, and ventilation are balanced to interact perfectly with each other. The goal of the IRINOX BALANCE SYSTEM® is to always guarantee the freshness and original quality of the product.
  - Condenser: designed by IRINOX, it guarantees the performance declared in Climate Class 4.
  - Evaporator: designed by IRINOX with cataphoresis treatment and new generation epoxy resin coating which provides considerable resistance to chemical and environmental corrosion.
  - Ventilation: Use of high efficiency one-speed fans.
  - Compressor: Highest efficiency and performance on the market.
- 304 stainless steel internal and external material.
- CFC-free high-density polyurethane insulation.
- Full width door with low temperature resistant magnetic gasket.
- Self-contained, air-cooled energy efficient condensing unit.
- R404a refrigerant gas.
- 4 adjustable feet: 6" to 7 7/8".
- Maximum cleanliness and hygiene facilitated by rounded corners and components in the chamber in compliance with NSF standards.
- Front mounted USB data port transfer to download and save HACCP data.
- End of cycle hold mode.
- Manual defrosting required daily.
- Conveniently located and removable condensation tray.
- Power cord included (no plug).


### Unique Design and Performance Features

- EasyFresh® Next cooling cycles rapidly lower the core temperature of the food to 37°F directly from its heat source, quickly reducing bacterial proliferation which is the number one cause of foods' natural deterioration process.
- EasyFresh® Next has two cycles dedicated to cooling:
  - Delicate +37°F – Suitable for products that are thin or light in density such as mousses, creams, fish, rice, vegetables, etc.
  - Strong +37°F – Ideal for dense, large-sized, or packaged products such as meats, soups, sauces, casseroles, etc.
- EasyFresh® Next's freezing cycles transform the water contained in food into microcrystals that preserve foods' natural structure and quality for much longer. EasyFresh® Next has 2 freezing cycles:
  - Delicate -0°F – Works in two phases; one phase at positive temperatures and the other at negative – Delicate is best for hot products such as savory, pastry, leavened bakery items and dense proteins.
  - Strong -0°F – Quickly freezes room temperature or below products down to -0°F at their core with an air temperature reaching -31°F. This is also ideal for stabilizing the structure of ice cream, proteins, cooked products, etc.
- Per production cycle (depending on product density):
  - Blast Chilling – up to 90 minute cycle.
  - Shock Freezing – up to 240 minute cycle.
- Automatic recognition of manual work mode (timed) or automatic mode (with probe inserted at the beginning of the cycle).
- Indirect air distribution and special airflow pattern to ensure uniform temperature uniformity.
- Intuitive touchscreen display.
- Easily accessible evaporators, waterproof fans, and removable magnetic condenser filter.

### Options and Accessories

- Additional wire shelves
- 4 swivel casters, 2 locking
- Opposite (right) hinging door

**EF NEXT SL – CABINET DIMENSIONS**

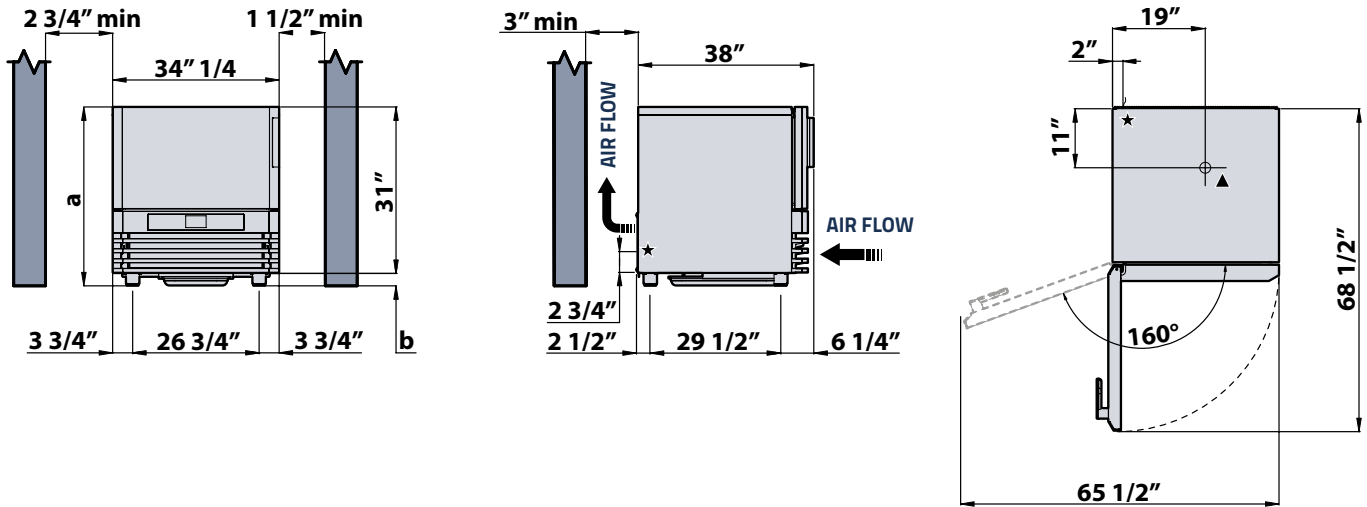

**HEIGHT**

		a	b
Standard feet	in	37"	6" + 7 7/8"
Castors option	in	35"	3 6/7"

Measurement in inches

- ★ Main power cable
- ▲ Drain pipe (corrugated flexible hose Ø 1 1/4")

**TECHNICAL SPECIFICATIONS**

Electric supply	-	208V - 1PH - 60Hz		
Power rating	W	1300		
Full load amps (FLA)	A	8.2		
Main power cable	gauge	2C + G AWG14		
Compressor rating	HP	0.75		
Refrigeration yield (+14/+104°F; Suction Temp +68°F; Subcooling OK)	btu/h	6694		
Condenser rating (+14/+104°F; Suction Temp +68°F; Subcooling OK)	btu/h	10268		
Minimum required air flow for ventilation	ft³/h	35310		
Refrigerant gas type	-	R404a		
Nominal refrigerant charge	oz	21,16		
Climate class (= max ambient temp)	°F	4 (= 86°F / 30°C)		
Dimension (WIDTH x DEPTH)	in	34 1/4" x 38"		
Internal cell dimension (WIDTH x DEPTH x HEIGHT)	in	28 3/4" x 22" x 14 3/4"		
Cabinet weight	Lb	330		
Noise (16,4 ft)	dB(A)	58		

**INSTALLATION NOTES**

Compressor requires 3" minimum rear wall clearance or 1 1/2" right or left clearance.  
Unit must be clear of outside heat sources.  
The blast chiller must be installed by following and complying with the contents of the specific installation manual.  
The content of the manual must be carefully followed to ensure correct operation and to protect the rights of the user based on the warranty.  
Appliance may be equipped with L6-15P Nema plug.  
Continuous product development may require changes to specifications without notice.