

**Refrigeration Equipment
3-Hinged Glass Door Full Height
Merchandiser Refrigerator 81" Long**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738308 (KCHGM72R)

3-Hinged Glass Door Full
Height Merchandiser
Refrigerator 81" Long

Short Form Specification

Item No. _____

3-glass door refrigerator with exterior back panel, bottom panel, and top panel in galvanized steel, exterior side panels in painted steel; interior back, side, and top panels in painted aluminum, and internal bottom panel in 304 stainless steel. Durable and easy to clean for daily commercial use. Control with cabinet temperature display. Self-closing door feature lock and key. Electronic control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.

Construction

- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Optional Accessories

- Shelf for 48" and 72" (left/right) Merchandiser (Glass Door) PNC 880594
- Middle Shelf for 72" Merchandiser (Glass Door) PNC 880595
- Shelf clips (4-pack) PNC 880611

APPROVAL: _____

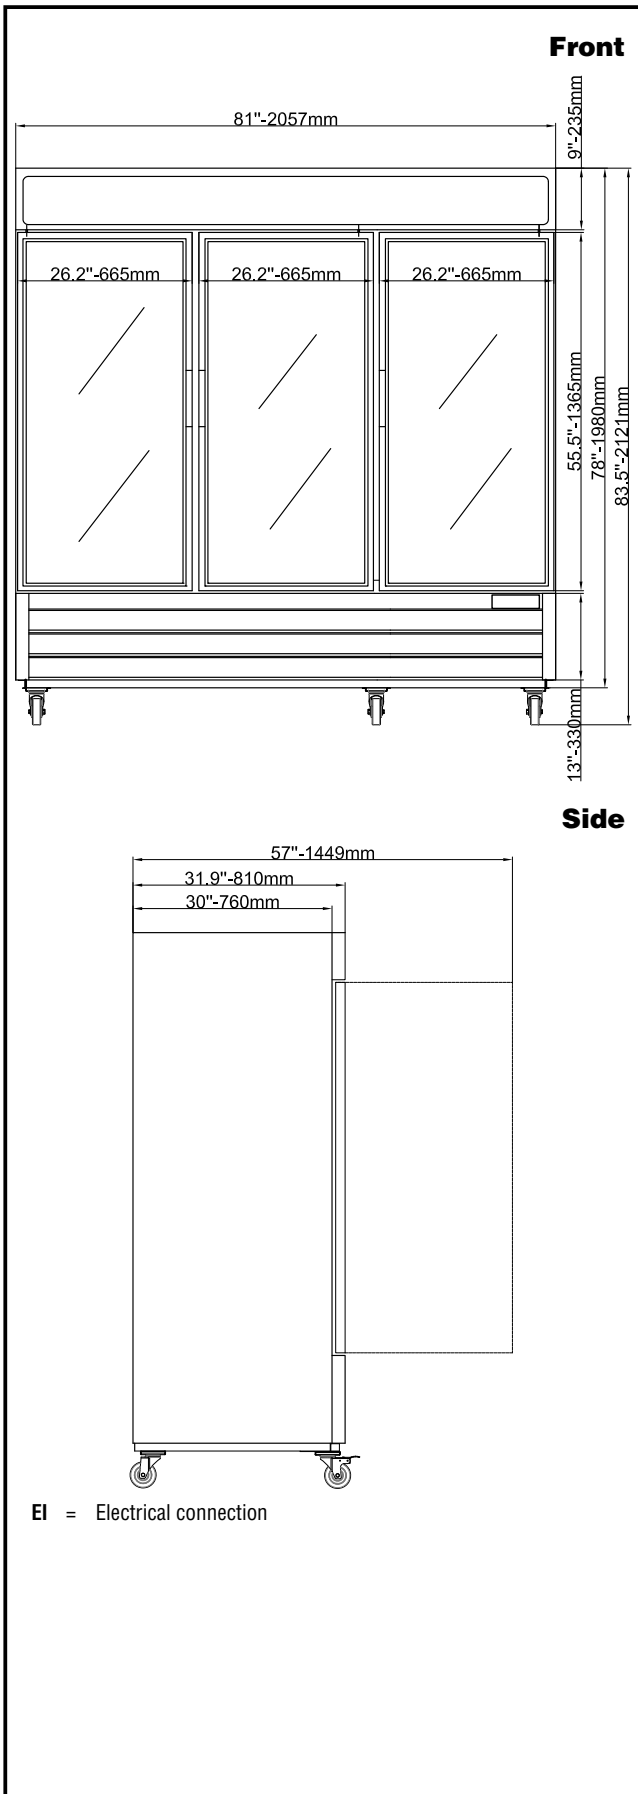

Electric

Supply voltage:	738308 (KCHGM72R)	115 V/1 ph/60 Hz
Electrical power, max:		0.78 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	72 cu.feet
------------------------	------------

Key Information:

Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057.4 mm)
External dimensions, Depth:	31 7/8" (810.26 mm)
External dimensions, Height:	79 1/2" (2019 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	27 1/2" / (698.5 mm)
Internal Dimensions (height):	52 3/8" / (1330.96 mm)
Internal Dimensions (width):	76 3/8" / (1940.56 mm)
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	780 lbs (354 kg)
Shipping volume:	142.86 ft ³ (4.05 m ³)
Number and type of grids (included):	12 - 618x600
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Warranty:	3 / 5 years
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Compressor power:	3/4 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Current consumption:	7.5 Amps
Refrigerant type:	R290
Refrigerant weight:	150 g