

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CM-V2W Dispensing Tower




Sparkling & chilled still water
two faucet counter mount
or wall mount tower

10.69"W x 10"D x 20.75"H

Specifications

- Flow rate is adjustable to your liking and can be locked in a specific setting
- Faucet flow rate: 1.5-2 oz per second
- Two faucets for sparkling and chilled water
- Clearance: 12"
- Ergonomic handles
- For use and pairing with CR-UCM1 or CR-UCM2 remote chillers
- Lift off drip pan
- Mirrored stainless steel finish. Optionally available in brushed stainless steel finish
- Weight: 10 lbs

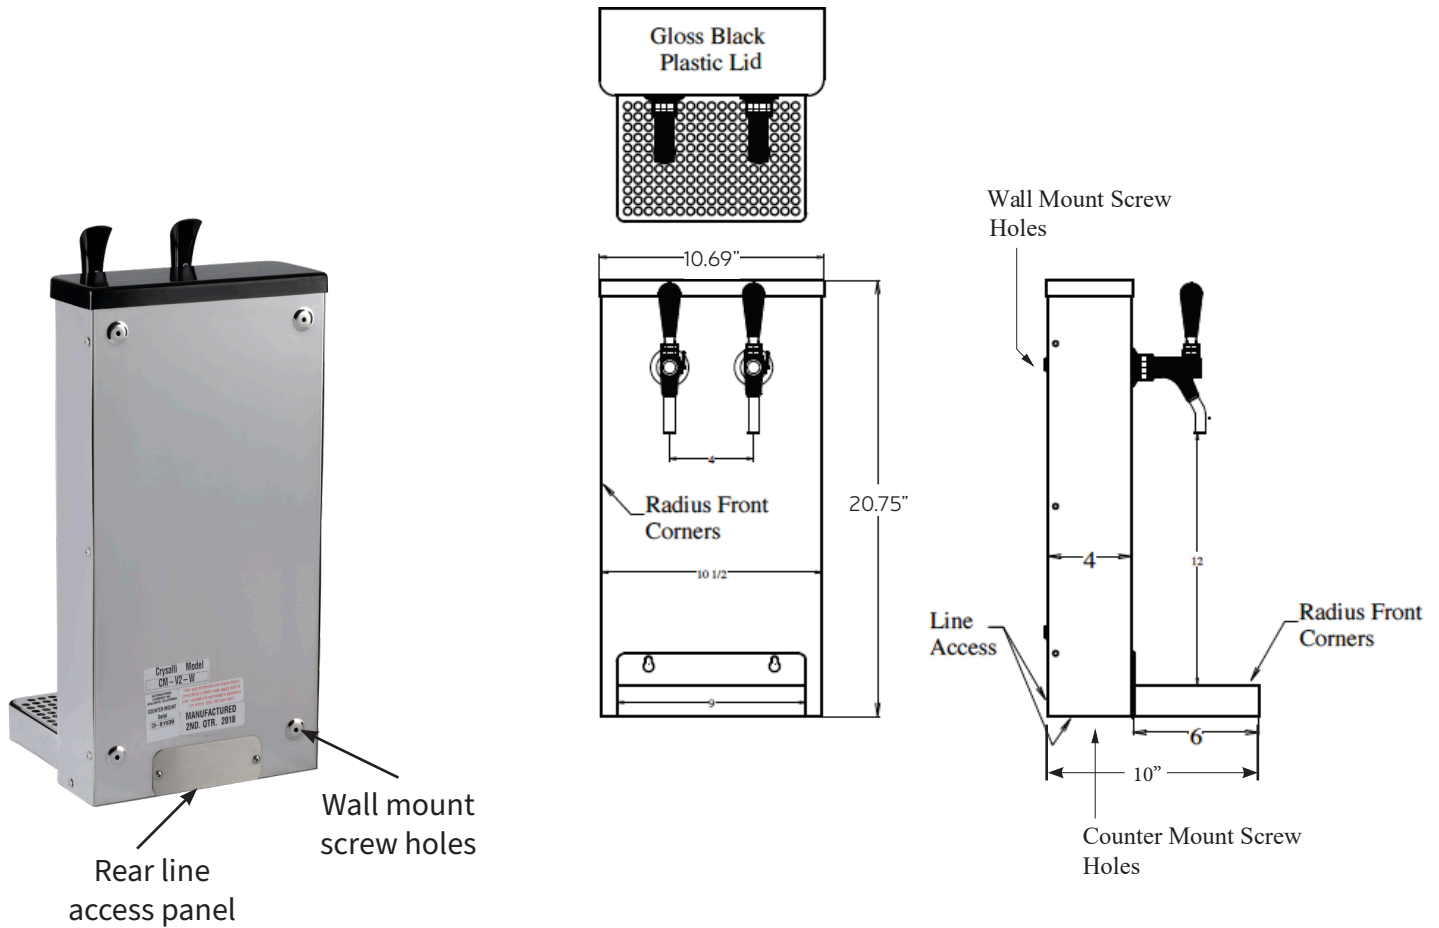

Accessories:

□ CR-UCM1

Remote Chiller unit
50 ltr per hr @<40°
Up to 30ft max trunk line run
Still & Sparkling



□ CR-UCM2

Remote Chiller unit
80 ltr per hr @<40°
Up to 40ft max trunk line run
Still & Sparkling



□ CR-KIT-UCM

Installation Kit for remote chiller units, UCM1 & UCM2, includes: 5ft of CR-4L38 trunkline, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower



□ CR-SDL-SSX1

Universal sanitary lever assembly for use on countertops, custom towers, and are able to be retrofit to CBR towers



NSF: CMB X0101-B Faucets and hose

