



PIPER'S SUPERIOR FOUNDATION

Featured on our toughest racks:
Two 14 gauge aluminized steel reinforcing channels support our .090" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and heavy duty plate casters make this the strongest foundation in the industry.

Piper Transport Cabinets are built extra-strong to withstand the rigors of transporting bakery and food service products. A welded bottom ensures rigidity as well as permits forklift loading and unloading. Heavy duty plate casters promote easy mobility, and with many sizes to choose from, storage space will never be a problem.

STANDARD FEATURES

- ◆ Base is a solid bottom constructed of .125" aluminum, rolled edge base acts as a built-in bumper
- ◆ Two 14-gauge aluminized steel reinforcing channels attach the casters and support the bottom panel
- ◆ Frame consist of four extruded channels 1-1/2" x 5/8" x .094" aluminum. Corners have .190 channel supports for reinforcement
- ◆ Double pan top constructed of two .080" thick aluminum panels, fully welded corners
- ◆ Glides are channels spaced on 1-1/2" centers with 5/8" ledge, .090 thick extruded aluminum continuously welded to the frame
- ◆ Door panel is .125" PVC coated aluminum attached to cabinet with bakery hinges, 270 degree door swing with card clip
- ◆ Back panel is .080" aluminum fully welded
- ◆ 1/2" extruded aluminum tie bar keeps cabinet square
- ◆ 16-gauge stainless steel positive gravity latch is provided to keep door closed during transport
- ◆ Stainless steel side door latch holds door open
- ◆ One inch insulation surround the cabinet (Insulated models only)
- ◆ Card clip, easy identification of cabinet content when door is closed

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER

- | | | |
|------------------------------|------------------------------|---------------------------------|
| <input type="checkbox"/> 918 | <input type="checkbox"/> 933 | <input type="checkbox"/> 941-EX |
| <input type="checkbox"/> 922 | <input type="checkbox"/> 936 | <input type="checkbox"/> 941-HD |
| <input type="checkbox"/> 926 | <input type="checkbox"/> 941 | |

DIMENSIONS

- ◆ 918 - 34-3/4" x 21" x 27-3/8"
- ◆ 922 - 40-3/4" x 21" x 27-3/8"
- ◆ 926 - 46-3/4" x 21" x 27-3/8"
- ◆ 933 - 57-1/4" x 21" x 27-3/8"
- ◆ 936 - 63-1/4" x 21" x 27-3/8"
- ◆ 941 - 69-1/4" x 21" x 27-3/8"
- ◆ 941-EX - 69-3/4" x 21" x 31"
- ◆ 941-HD - 69-3/4" x 21" x 31"

HEAVY-DUTY CASTERS


- ◆ 5" diameter x 1-1/4" wide swivel sealed wheels
- ◆ 350 lb. capacity
- ◆ Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- ◆ Maximum low temperature flexibility or superior performance even in freezing temperatures

COMMON OPTIONS

- ◆ Wheel brakes
- ◆ Push handle
- ◆ Chest handles
- ◆ Personalized embossment
- ◆ See reverse side for additional options



WARRANTY

- ◆ One year parts and labor. Warranty is detailed on inside front cover of the price list.

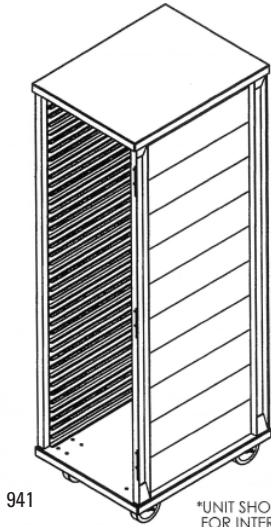

941
*UNIT SHOWN WITHOUT DOOR
FOR INTERIOR DETAIL

Glides are channels spaced on
1-1/2" centers with 5/8" ledge

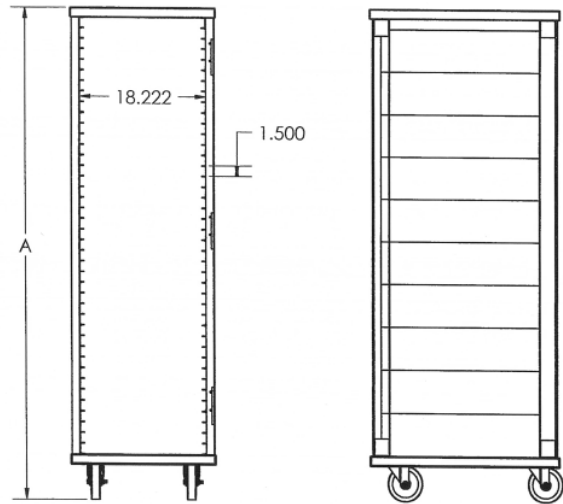

Model#	Height	Width	Depth	Channel Spacing (in.)	*Pan Capacity	Ship Wt. (lbs)
918	34-3/4"	21"	27-3/8"	1-1/2"	18	96
922	40-3/4"	21"	27-3/8"	1-1/2"	22	100
926	46-3/4"	21"	27-3/8"	1-1/2"	26	109
933	57-1/4"	21"	27-3/8"	1-1/2"	33	117
936	63-1/4"	21"	27-3/8"	1-1/2"	36	120
941	69-1/4"	21"	27-3/8"	1-1/2"	41	136
941-EX	69-3/4"	21"	31"	1-1/2"	41	148
941-HD	69-3/4"	21"	31"	1-1/2"	41	175

*Rack capacities are for 18" x 26" sheet pans
Height includes casters.
Custom height sizes and glide spacing available.
Typical freight class: 175

OPTIONS / ACCESSORIES

- (LD) Lexan full-view door
- (DD) Dutch door, only available on 941 units
- (CH) Chest handles, set of 2
- (EMB) Personalized embossment, 12 letters per line
- (PH) Push handle
- (I) Insulating transport cabinet
- (B) Set of 4 non-marking rubber corner bumpers
- (PB) Full perimeter non-marking bumper
- (WB) Wheel brakes, set of 2
- (5x2) Heavy-duty casters, set of 4
- (CP) Correctional package, includes welded casters and hole in door latch for paddlelock
- (CHT-2) Canned heat tray insert
- (Y4) Polyurethane 4" casters (set of 4)
- (Y5) Polyurethane 5" casters (set of 4)
- (FL) Floor lock
- (HD-Unit) Heavy duty corner gussets on the top panel for extra stiffness
- (EX-Unit) 4 Tie bars (2 in front, 2 in back)

J-4 SPEC

PIPER PRODUCTS
BUILT TO LAST
www.piperonline.net

300 S. 84th Avenue
Wausau, WI 54401
Phone: 800-544-3057
Fax: 715-842-3125

LIMITED WARRANTY: PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.