



PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

SELF-CONTAINED BLAST CHILLER/SHOCK REACH-IN FREEZER

## SELF-CONTAINED BLAST CHILLER/SHOCK REACH-IN FREEZER

### VBCF12-100PU

#### EXCLUSIVE WARRANTY

- ▶ 3 Year Parts & Labor Warranty
- ▶ 5 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets



#### CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior
- Die-Formed Interior Floor Has Rounded Corners
- Central Drain For Easy Cleaning
- Anti-Condensation Perimeter Heating Around Door Opening
- Ergonomic Vertical Door Handle And Stainless Steel
- Snap In Place Magnetic Gaskets Self Closing Door With Hold Open Stop At 100°

#### FEATURES

- Soft And Hard, Timed Or Core Probe Blast Chilling
- Soft And Hard, Timed Or Core Probe Shock Freezing
- Automatic Recognition Of Core Probe
- Multi Point Sensor Temperature Display Button
- Core Probe Heater Button
- HACCP Alarm Display Button
- Pre-Cooling Cycle Button
- Adjustable Evaporator Fan Speed Button
- Timed Manual Defrost Button
- USB Data Recorder/Interface
- Infinity Mode Program With Adjustable Set Point
- Automatic Conservation Mode At End Of Cycle
- On Board Recipe Book With 68 Pre-Set Programs
- 99 Free Memory Positions For Custom Programs
- LCD Illuminated Temperature Display
- Unit Comes Standard With Twelve (12) Wire Rod Tray Slides
- Real Time Clock
- One, High Precision Heated Multi Sensor Probe
- Stainless Steel Feet

#### REFRIGERATION

- Self-Contained Refrigeration System Uses R404 Refrigerant
- Evaporator Fitted With A High Flow Rate Fan Insures Maximum Cooling Efficiency
- Indirect Air Flow Assures Highest Product Quality
- Manual Defrosting With Door Open On A Timed Cycle
- Blast Chilling (194°F to 37°F in 90 minutes) Or Shock Freezing (194°F to 0°F in 240 minutes) Cycles



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

#### OPTIONS & ACCESSORIES

- UV Sterilization Lamp (must be added at time of order)
- Change Door Swing
- Single Sensor Probes (up to 4 possible)
- Casters With Brakes

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 9/25/23 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_



# SELF-CONTAINED BLAST CHILLER/SHOCK REACH-IN FREEZER

## VBCF12-100PU

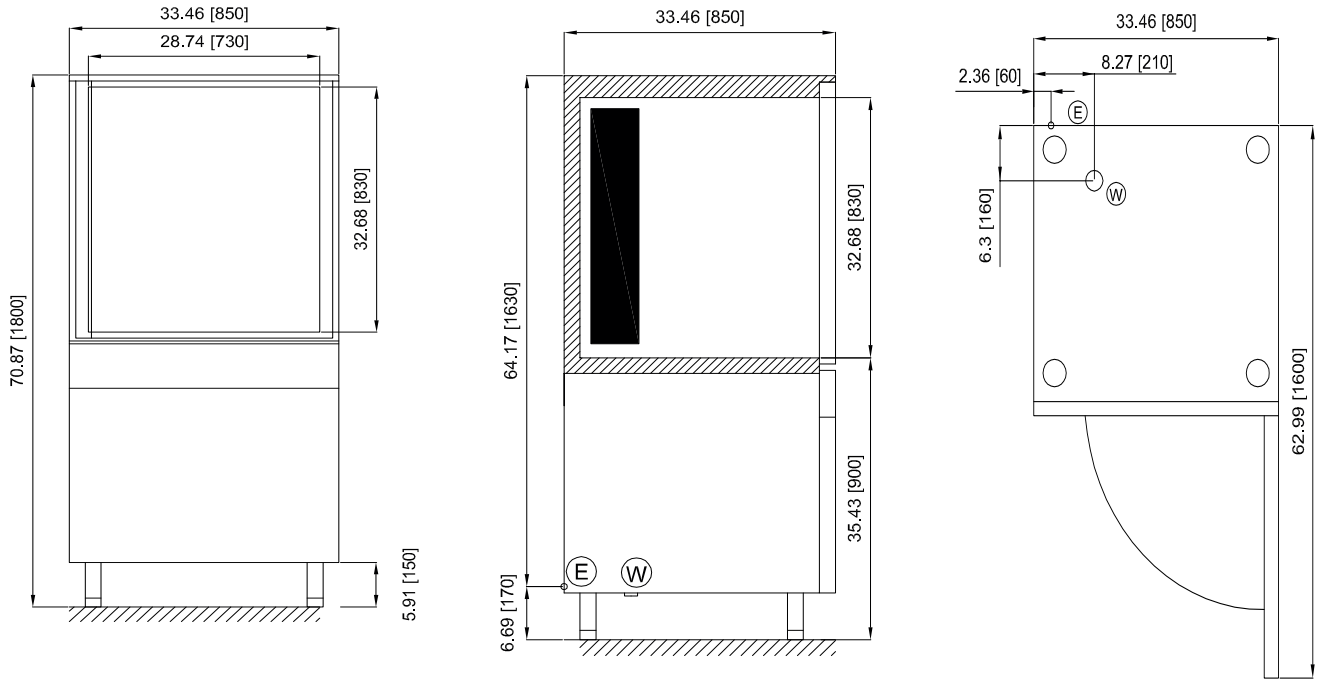

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

| CHARACTERISTICS                   |                 | REFRIGERATION DATA                    |         | SHIPPING DETAILS    |         |
|-----------------------------------|-----------------|---------------------------------------|---------|---------------------|---------|
| Width, Overall (in.)              | 33.46"          | Condensing Unit Size, HP              | 2.0     | Height              | 78"     |
| Depth, Overall (with handle) (in) | 33.46"          | Refrigerant                           | R404    | Width               | 38"     |
| Height Overall (in.)              | 70.87"          | Capacity (BTU/HR) (113°F/-13°F)       | 10,318  | Depth               | 37"     |
| Width, Door Open 90° (in)         | 62.99"          | Heat Rejection (W) (14°F/95°F)        | 10,342  | Crated Weight       | 602 lbs |
| Door Opening (in.)                | 28.74" x 32.68" | Refrigerant Amount (lbs)              | 3.53    | * Pans Not Included |         |
| Wall Thickness (in)               | 2.36"           | PAN COUNT & PERFORMANCE               |         |                     |         |
| Number of Doors                   | 1               | Sheet Pan Capacity* (18" x 26")       | 12      |                     |         |
| <b>ELECTRICAL DATA</b>            |                 | Steam Table Pan Capacity* (12" x 20") | 12      |                     |         |
| Cabinet Voltage                   | 208-240/60/3    | Chilling Capacity In 90 Min           | 100 lbs |                     |         |
| Total Amperes                     | 9.0             | Freezing Capacity In 240 Min          | 70 lbs  |                     |         |
| NEMA Plug                         | 15-20P          | Climate Class                         | 5       |                     |         |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 9/25/23 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence