

Job: _____

Item No. _____

Mobile Heated Cabinet

Heavy Duty transport cabinets with universal tray slides for use with 12" x 20" pans and 18" x 26" trays.

- Stainless steel interior and exterior
- Fully insulated
- Cabinet is fully framed all vertical and horizontal edges
- Caster mounting plates fully welded to cabinet framing
- Caster mounting plates 6" x 6" steel plate drilled and tapped
- All hardware mounted through framing
- Door framed, insulated and gasketed
- Door louvered with adjustable damper
- Top mounted control
- 60 to 230 degree temperature range
- Armor Heat® heating technology makes this the most energy efficient cabinet in its class
- 5" casters standard
- Low power requirements
- Universal angles accommodate 250 lbs per pair
- Universal angles adjustable on 1 1/2" centers
- Universal angles will accommodate 2 (12" x 20") pans, 1 (18" x 26") or 2 (14" X 18") trays
- Universal angles designed to minimize pan/tray movement during transport
- Universal angle posts removable for cleaning

Models

- M11UA9
- M11UA12
- M11UA16



M11UA16 shown




Made in USA



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
 Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

MODEL #	CAPACITY 18"x26" trays - 2 1/2" pans	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	VOLTAGE	WATTAGE	AMPERAGE	SHIP WEIGHT
M11UA9	9 sets UA brackets	25 1/2"	35 1/2"	53"	120	990	8.25	410
M11UA12	12 sets UA brackets	25 1/2"	35 1/2"	71 3/16"	120	990	8.25	450
M11UA16	16 sets UA brackets	25 1/2"	35 1/2"	71 3/16"	120	990	8.25	500

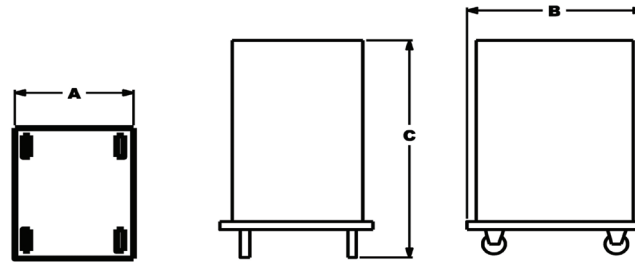

GENERAL: Cabinet constructed with stainless steel interior and exterior. All double wall construction, insulated with 2" high density fiberglass insulation on the top, sides, door and bottom. All exterior surfaces shall be ground and polished to a #4 finish.

INTERNAL FRAME: All vertical and horizontal edges framed with 1 1/2" x 1 1/2" x 1/8" angle steel, arc welded, cross braced and reinforced at all corners.

BASE FRAME: 1/8" formed steel base. Base shall have, four 6" x 6" x 5/16", steel plates drilled and tapped to accommodate 5" or 8" casters. The plates are fully welded to frame on all four sides.

INNER CABINET: Inner cabinets shall be all 24 gauge 300 series stainless steel. Universal angles constructed of heavy gauge wire, vertical and horizontal 11 gauge flat stock. Each pair shall accommodate 250 lbs. Universal angles are chrome plated with heavy nickel and a clear coat. Angles adjustable on 1 1/2" centers. Angles will accommodate 2 (12" x 20") pans or 1 (18" x 20") tray or 2 (14" x 18") trays.

DOOR: Doors shall be all 20 gauge stainless steel. Door shall have full interior frame constructed of 3/4" x 3/4" 14 gauge galvanized angle steel. Doors shall be fully insulated and gasketed. Doors shall have an exterior louver with an interior damper for moisture control. All door hardware shall be secured through framing in cabinet and door. Doors shall have a heavy duty positive and magnetic door latch and heavy duty refrigeration type door hinges.

ELECTRICAL CHARACTERISTICS: Cabinets shall have a top mounted control panel consisting of an on/off switch with power indicator light and electronic control with digital temperature display. Each cabinet shall be heated by a 120 volt 60 cycle 1 phase Armor Heat™ system. Cabinets shall come complete with a permanently mounted 8' cord with a Nema #5-15P plug. Top of cabinet is removable for easy access to controls.

CASTERS: Cabinet shall have 4 heavy duty 5" casters, 2 rigid and 2 swivel casters mounted to 6" x 6" x 5/16" steel plate drilled and tapped.

Accessories, Options, Variations

- Pass-thru doors
- Left hand hinged doors
- Vertically mounted push handles
- Heavy duty casters, 5" or 8"
- Exterior edges protected with 1" x 1" x 1/8" stainless steel angle
- Flush mounted heavy duty paddle latch
- Heavy duty transport latch that will accept a padlock, 12 gauge stainless steel
- Stainless steel perforated shelves
- Side mount gravity latch
- Dutch doors
- Cord reel
- Sterno adapter
- Lexan door
- Stainless steel adjustable legs
- Heavy duty bumper system
- Tamper proof fasteners
- Control panel cover, lockable
- Continuous 12 gauge stainless steel welded door hinge
- Additional Universal slides



TEST OUR METAL®

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

REV 2016-11