

- **MI32R** 26-1/8"L x 36-1/2"D x 39-1/8"H
- **MI33R** 38-1/8"L x 36-1/2"D x 39-1/8"H
- **MI36R** 74-1/8"L x 36-1/2"D x 39-1/8"H

## Included

- Breeze self-contained refrigeration
- Casters
- Corrosion resistant stainless steel tub & fan shroud
- Integrated average product temperature adjustable from 38°F to 40°F
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Solid metal deck
- Straight insulated glass ends





**MI33R**

| Specify                      | Standard Features                                                                              | Additional Options                                                                                                                                           |
|------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EXTERIOR COLOR</b>        | <ul style="list-style-type: none"> <li>• Powder coated (stock colors, specify RAL#)</li> </ul> | <ul style="list-style-type: none"> <li>• Laminate (non-stock colors)</li> <li>• Laminate (stock colors)</li> <li>• Stainless steel</li> </ul>                |
| <b>INTERIOR COLOR</b>        | <ul style="list-style-type: none"> <li>• Powder coated Silversan Black</li> </ul>              | <ul style="list-style-type: none"> <li>• Stainless steel</li> </ul>                                                                                          |
| <b>BASE SUPPORT</b>          | <ul style="list-style-type: none"> <li>• Powder coated Silversan Black</li> </ul>              | <ul style="list-style-type: none"> <li>• Stainless steel (must choose stainless exterior)</li> </ul>                                                         |
| <b>BUMPER</b>                | <ul style="list-style-type: none"> <li>• 1" bumper, double strip (specify color)</li> </ul>    |                                                                                                                                                              |
| <b>ELECTRICAL CONNECTION</b> | <ul style="list-style-type: none"> <li>• 6' Straight blade power cord (self-cont.)</li> </ul>  | <ul style="list-style-type: none"> <li>• 6' Locking power cord (self-cont.)</li> </ul>                                                                       |
| <b>EVAPORATOR COIL</b>       | <ul style="list-style-type: none"> <li>• Non-coated evaporator coil</li> </ul>                 | <ul style="list-style-type: none"> <li>• E-Coated evaporator coil</li> </ul>                                                                                 |
| <b>THERMOMETER</b>           | <ul style="list-style-type: none"> <li>• Digital fahrenheit thermometer</li> </ul>             | <ul style="list-style-type: none"> <li>• Digital celsius thermometer</li> </ul>                                                                              |
| <b>MISCELLANEOUS</b>         |                                                                                                | <ul style="list-style-type: none"> <li>• Second year parts &amp; labor warranty (excludes compressor)</li> </ul>                                             |
| <b>ACCESSORIES</b>           |                                                                                                | <ul style="list-style-type: none"> <li>1. • Clean Sweep® coil cleaner (self-cont.)</li> <li>• Electrical drop cord cover (matches exterior color)</li> </ul> |

Option Notes: 1 - n/a on model MI33R

| Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below. |                                                     |                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------|
| Zone                                                                                                                                                            | Intended Product To Be Displayed                    | Warmest Avg Prod Temp ° F |
| 1                                                                                                                                                               | Packaged raw meat (38°) Packaged produce/deli (40°) | 38-40                     |



### PLAN VIEW

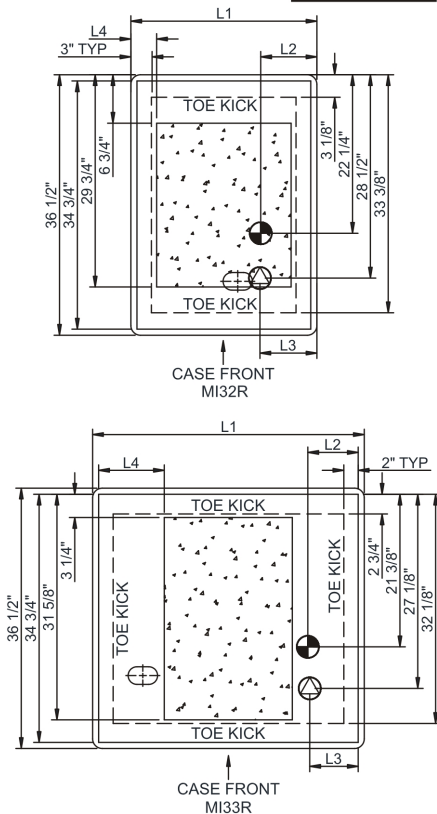

TOP VIEW

|       |      |        |
|-------|------|--------|
|       | "L3" | "L4"   |
| MI32R | 8"   | 3 5/8" |
| MI33R | 7"   | 6 3/4" |
| MI36R | 7"   | 8 3/4" |

SIDE VIEW

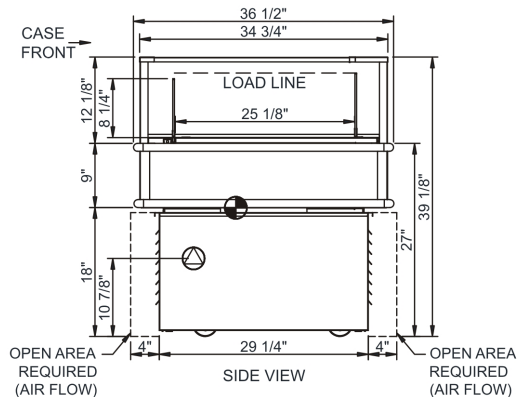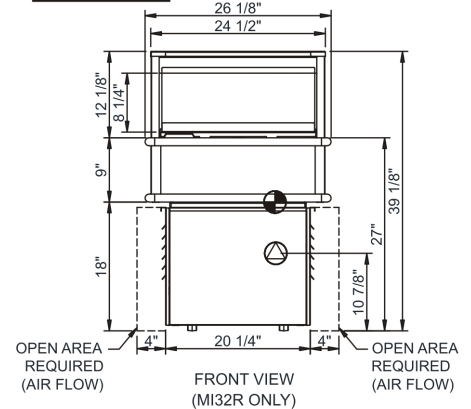

NOTE: ALL DIMENSIONS APPROXIMATE

-  **ELECTRICAL JUNCTION BOX**  
(SUPPLIED WITH 6" LEADS OR POWER CORD).
-  **LOCATION OF DRAIN TUBE FOR REMOTE REF.**  
**ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).**

-  REFRIGERATION LINE CONNECTION.
-  REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

-  SELF-CONTAINED CASE SERVICE ACCESS AREA.
-  DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

| Model Technical Specifications |     |       |      |                        |            |         |     |      |          |       |       |                 |     |                 |                 |        |
|--------------------------------|-----|-------|------|------------------------|------------|---------|-----|------|----------|-------|-------|-----------------|-----|-----------------|-----------------|--------|
|                                |     |       |      |                        |            |         |     |      |          |       |       |                 |     |                 |                 |        |
| Model                          | L"  | L1"   | L2"  | System Circuit Volts   |            |         | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug       | SST | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |
| M132R                          | N/A | 26.13 | 7.00 | Self-Contained (R513A) | Circuit #1 | 110-120 | 1   | 60   | 11.04    | 1,014 | N/A   | 5-15P or L5-15P | N/A | N/A             | N/A             | 650    |
| M133R                          | N/A | 38.13 | 7.00 | Self-Contained (R513A) | Circuit #1 | 110-120 | 1   | 60   | 9.35     | 801   | 2+G   | 5-15P or L5-15P | N/A | N/A             | N/A             | 750    |
| M136R                          | N/A | 74.13 | 7.00 | Self-Contained (R513A) | Circuit #1 | 110-120 | 1   | 60   | 15.19    | 1,540 | 2+G   | 5-20P or L5-20P | N/A | N/A             | N/A             | 950    |

\*\*\* Does not include electric defrost on freezer models.

**Regulatory Approvals:**

|            |                                                                                                                                                |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| All Models | <p>Accordance with AHRI Std 1200</p> <p>ETL Listed to UL 471</p> <p>ETL Listed to CAN/CSA 22.2 No. 120</p> <p>ETL Sanitation to NSF/ANSI 7</p> |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------|



In Accordance with  
**AHRI Std 1200**



### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Maximum load height is 8-1/4" up from deck.
- 3) Compressor air side intake and side discharge. All louvered panels cannot be blocked.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).