

# Countertop Radiant Broilers

## Standard Features

- Stainless steel exterior and interior
- 35,000 BTU stainless steel burners with standby pilot
- Independent manual controls every 12"
- Heavy-duty, reversible cast iron grates
- Top grates are adjustable multi-level
- Adjustable, stainless steel legs standard
- 3/4" NPT rear gas connection and regulator standard

## MODELS:

ATRC-24 / ATRC-36 / ATRC-48

**ATRC-24**



**ATRC-36**



**ATRC-48**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI  
STD Z83.11-2009 (2011)  
Certified to CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



**SPECIFICATIONS**

Models	Burners and control method	Gas type	Intake-tube pressure (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Work Area (inch)	Net weight (lbs)	Gross weight (lbs)
ATRC-24	2 Burners Independent Manual Control	NG	4	35,000	70,000	4" w.c.	23 <sup>9/10</sup> × 20 <sup>1/5</sup>	116.8	146.6
		LP	10	35,000	70,000	10" w.c.			
ATRC-36	3 Burners Independent Manual Control	NG	4	35,000	105,000	4" w.c.	35 <sup>7/10</sup> × 20 <sup>1/5</sup>	158.7	205
		LP	10	35,000	105,000	10" w.c.			
ATRC-48	4 Burners Independent Manual Control	NG	4	35,000	140,000	4" w.c.	47 <sup>9/10</sup> × 20 <sup>1/5</sup>	200.6	256.4
		LP	10	35,000	140,000	10" w.c.			

**PLAN VIEW**

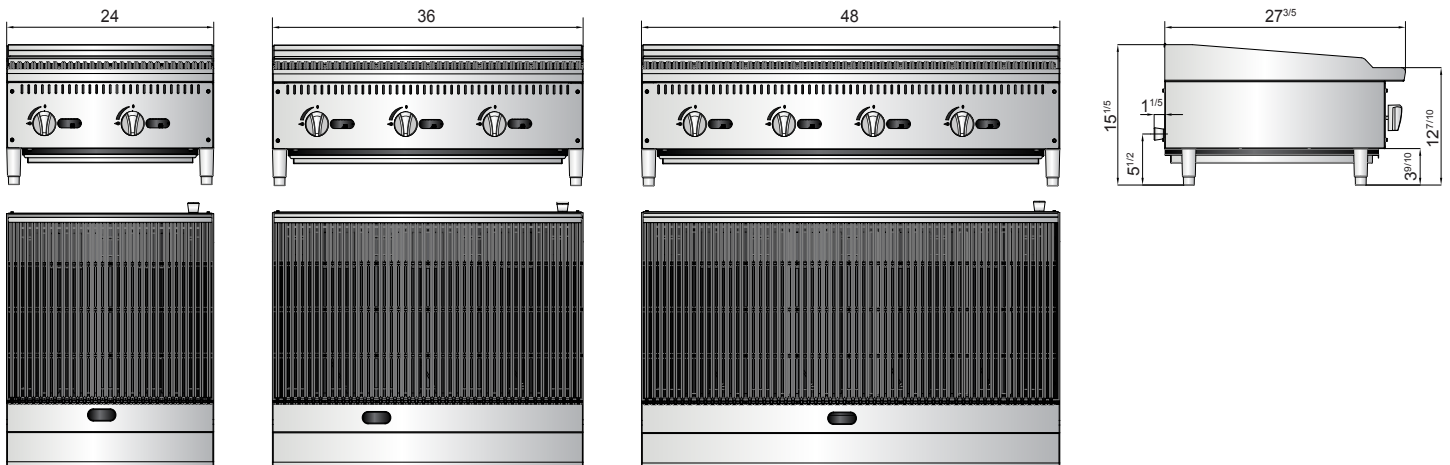

**ATRC-24**

**ATRC-36**

**ATRC-48**

