



RÔTISSERIE

## MINI-CONCEPT ROTI-ROASTER

5.520iF2LSP8

### ROTI-ROASTER MINI-CONCEPT

Space-saving and energy-saving Mini Rotisserie Concept. Boost impulse sales and maximize food presentation during the cooking process.

### The MINI-CONCEPT: Optimization of space with a self-service display

Heated display with dual level stainless steel shelves angled at 10° for grab-and-go convenience. Featuring digital electronic temperature control. Mounted on castors with brakes.

**Topped by a programmable ROTI-ROASTER convection rotisserie** with baskets or chicken spits. 6 pre-set recipes via digital controls. Pre-heat, hold and cool-down cycles.

Easy-to-clean design with components that quickly break down and can be cleaned in a standard sink or dishwasher. Safely dispose of hot grease with gravity-fed grease collection system.







Designed for your operators to load and unload with rear door reach-in and pass-through configurations. Front or rear control options.


### EXPAND MENUS

A variety of baskets and skewers easily slide into place to cook pork loin, turkey breast, meatloaf, ribs, vegetables, and more. See [video](#).



5.520iF2LSP8

<b>BALD520</b> Chicken baskets standard		<b>BAP520</b> Small cuts baskets		<b>BAB520</b> Spit for large pieces	
<b>PD520</b> Stainless steel rack tray		<b>BCRA520</b> Spatchcock chicken baskets		<b>TP5520</b> Protective roof	

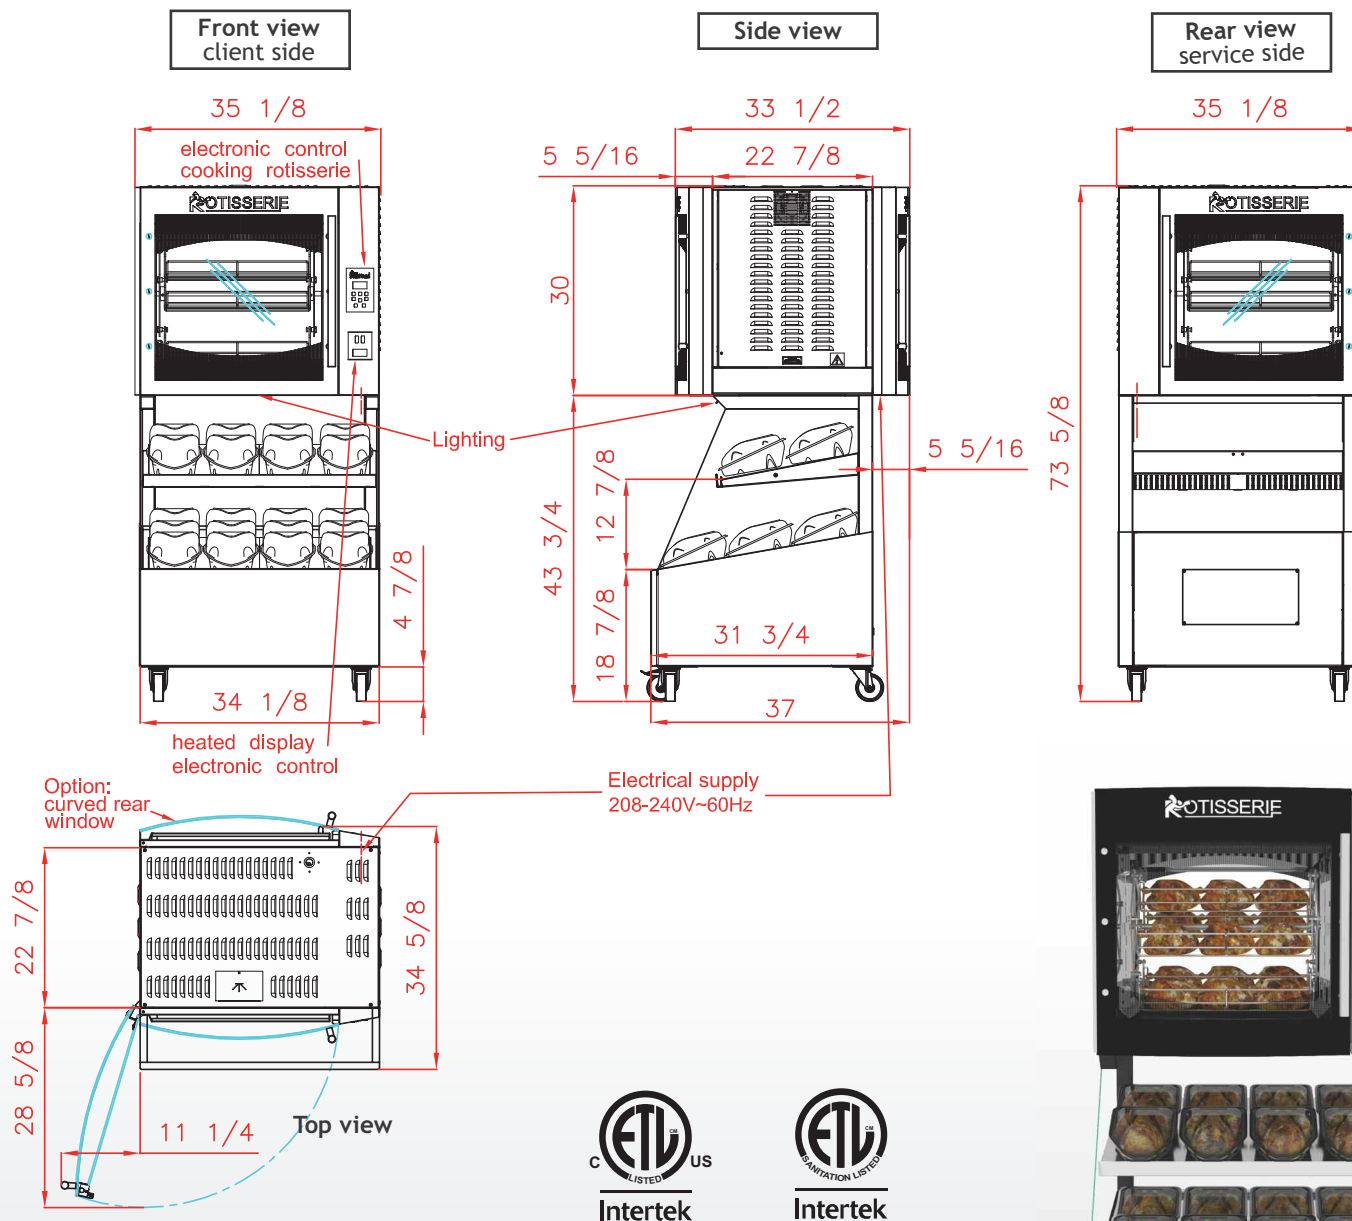

5.520iF2LSP8

### SPECIFICATIONS

Capacity roasted chickens	15-20 chickens, 5 baskets/spits
Display capacity	20 chickens
Power supply	208-240V~60Hz; 3 Phases + Ground
Electrical power	29 Amps; 5.9 kW
Weight and size (HxDxW)	474 lbs; 73 5/8 x 37 x 35 1/8 inches
Shipping weight and size	584 lbs; 81 1/8 x 40 5/8 x 36 5/8 inches
Warranty	1 year parts and labor

Revised:  
March 2021  
U.S. April 2021

DISTRIBUTOR / AGENT

Rotisol France, Inc.  
415 W. Walnut St. Gardena, CA 90248  
[info@rotisolusa.com](mailto:info@rotisolusa.com)  
Ph: 310 671-7254  
800 651 5969