

PROVINO II

WINE SHOWCASE

STANDARD FEATURES

- Double pane heated glass front and sides
- Diffused LED lighting 3000°K
- Dixell digital control (individual controls when lined up T1, T2)
- Bottom evaporator ventilation cooling
- Condensing unit not supplied
- Interior vertical shelf support in stainless steel
- Stainless steel structure
- Stainless steel wine rack
- Stainless steel foam in place bottom and top
- Standard stainless steel 304A high polish finish
- Adjustable feet
- Cases ship standard stainless steel interior and exterior

OPTIONS

- Acrylic wine rack 90°
- Acrylic wine rack 45°
- Front & back doors
- Door locks
- Condensing unit top mount (connected on field)
- Condensing unit bottom mount
- Remote: water cooled condensing unit
- RAL color/laminate/color metal



Photos shown with standard stainless steel interior and exterior. First photo shown with standard stainless steel wine rack. Second photo shown with optional acrylic wine rack 90° and 45°



Visit our website for more finishing options and RAL colors
www.oscartek.com

PROVINO II WINE				
TECHNICAL FEATURES		MODELS		
		PROVINO II W700 (PRVE28)	PROVINO II W1390 (PRVE55)	PROVINO II W2075 (PRVE75)
External Dimensions (L-D-H)	Inches	27 9/16" - 28 5/16" - 97 3/8"	54 5/8" - 28 5/16" - 97 3/8"	81 11/16" - 28 5/16" - 97 3/8"
	Inches-MM	700 - 719 - 2474	1388 - 719 - 2474	2075 - 719 - 2474
Crated Dimensions (L-D-H)	Inches	34" - 36" - 105"	61" - 36" - 105"	88" - 36" - 105"
	Inches-MM	863 - 914 - 2667	1549 - 914 - 2667	2235 - 914 - 2667
Number of Glass Doors	#	1	2	3
Number of Wine Bottles per Door - Stainless Steel Wine Rack	#	84	168	252
BTU's @ +14°F Evap Temperature	**BTU's	**2900	**4800	**6000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption (Remote)	(A)	2	3	4
Power Consumption (Top Mount Condensing Unit)	(W/A)	1250/6.5	1650/7.9	2000/10.9
Operating Temperature	°F	40°F	40°F	40°F
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	1/2" Suction, 1/4" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	600	900	1200
Crated Weights	Lb	800	1100	1400


** ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT.

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.


PROVINO II WINE SHOWCASE

STANDARD: PROVINO II - REMOTE

STANDARD - FRONT DOORS

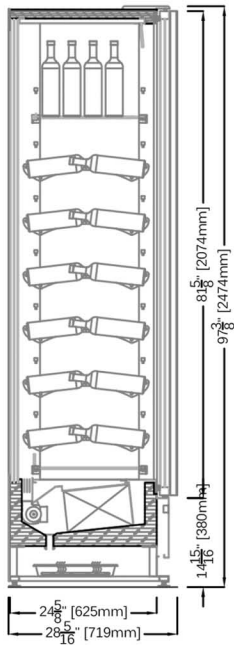


OPTIONAL: FRONT & BACK DOORS

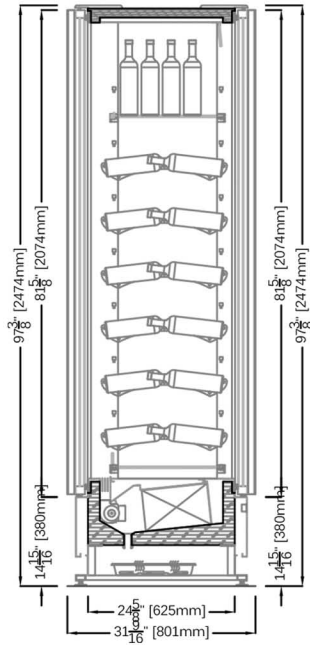


OPTIONAL: WINE RACKS

ACRYLIC WINE RACK 45°


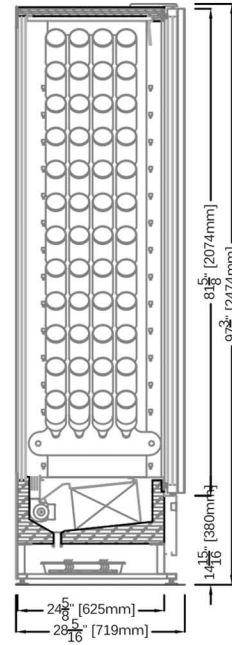


ACRYLIC WINE RACK 90°


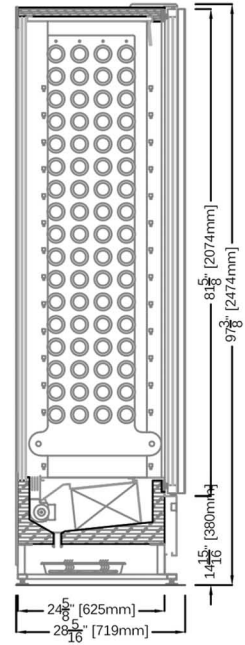


OPTIONAL: PROVINO II - SELF CONTAINED TOP MOUNT OR BOTTOM MOUNT CONDENSING UNIT

TOP MOUNT CONDENSING UNIT FRONT DOORS OR FRONT & BACK DOORS

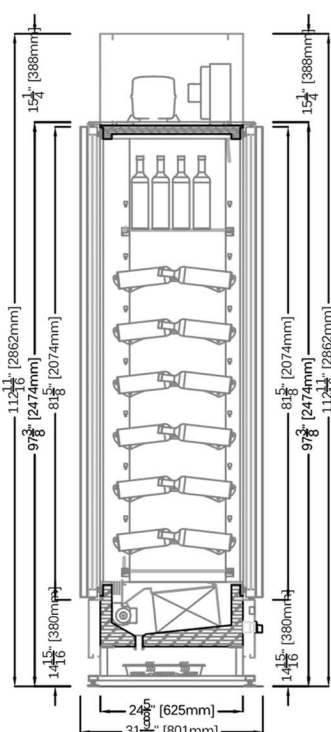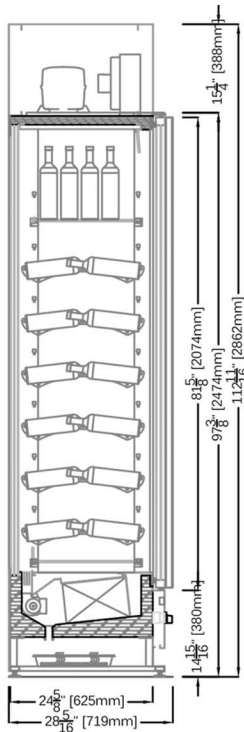

BOTTOM MOUNT CONDENSING UNIT FRONT DOORS OR FRONT & BACK DOORS

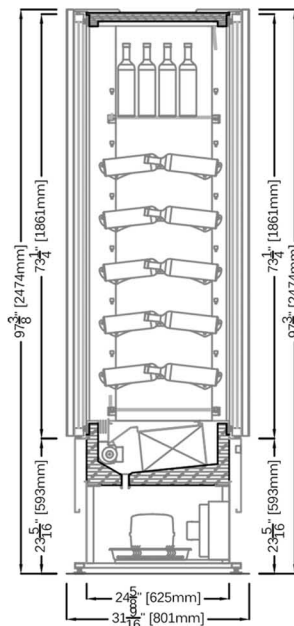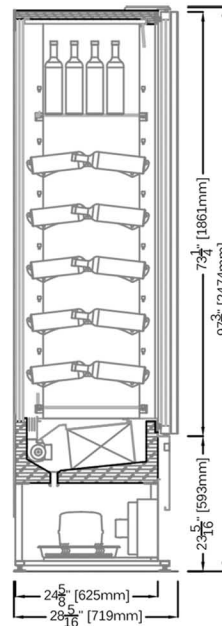


*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.


PROVINO II WINE SHOWCASE

STANDARD: PROVINO II - REMOTE

PLAN VIEWS: PROVINO II W700, W1390, W2075

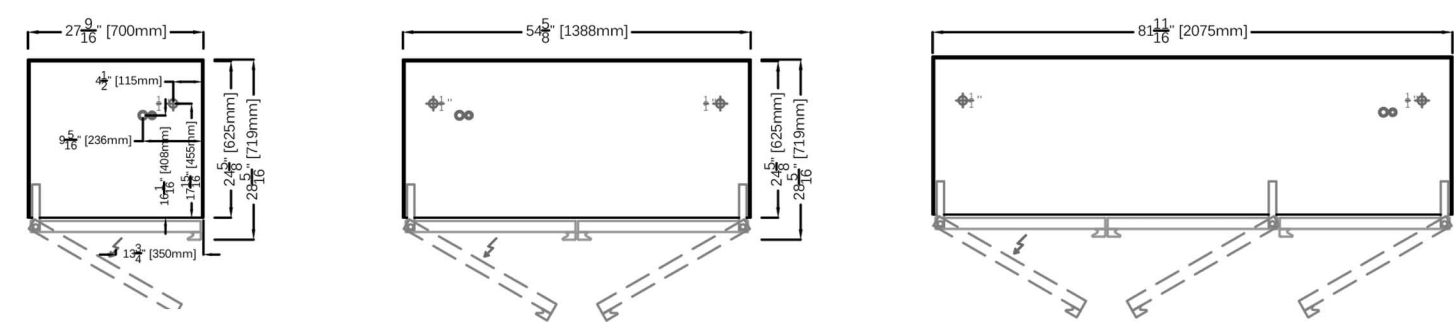

FRONT ELEVATIONS (CUSTOMER SIDE): PROVINO II W700, W1390, W2075

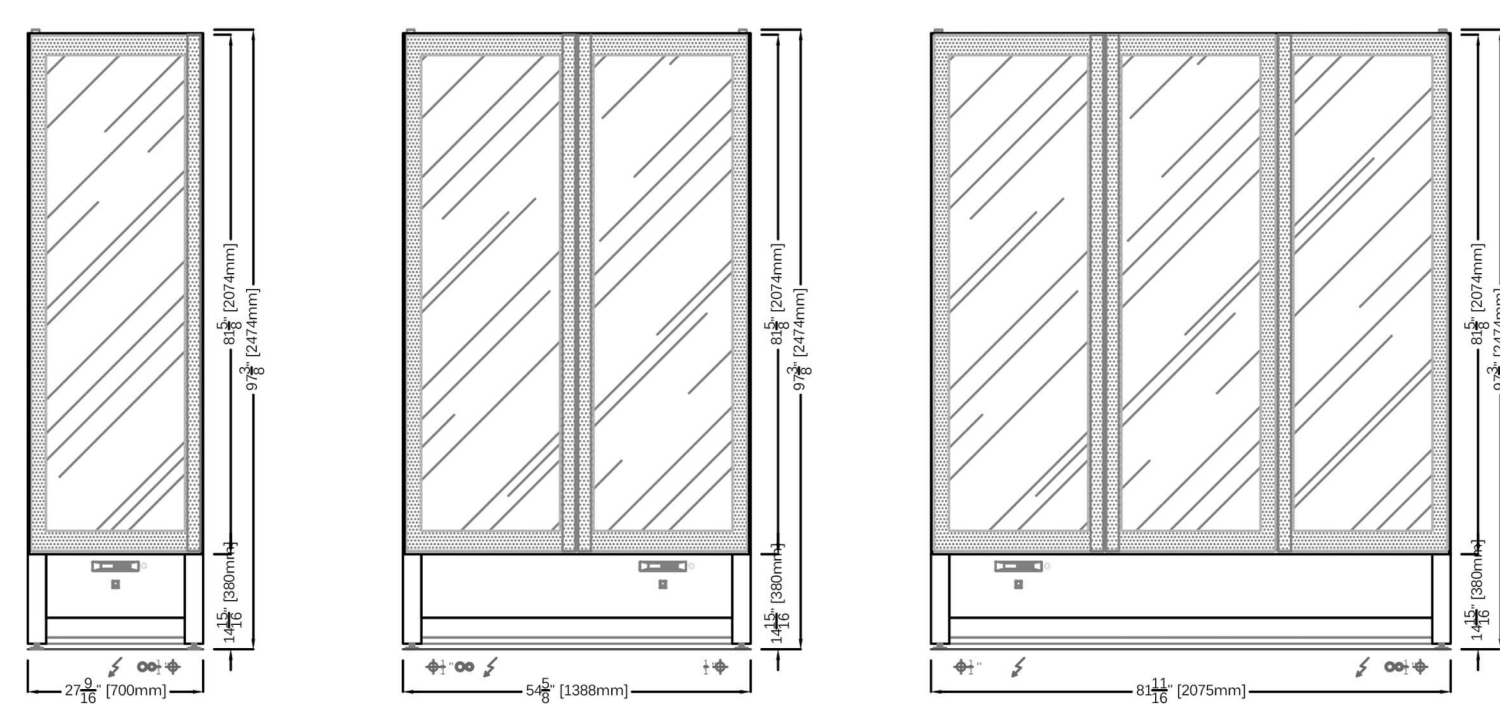

ELECTRICAL LEGEND	
∞	REFRIGERATED LINES
⊕ 1"	DRAIN
⚡	POWER

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.