


Specification Sheet

Short Form Specifications

Blendport worktables, Deluxe series, model_____.
Top constructed of 16 gauge 300 series stainless steel with 1½" roll on front, 1½" rear upturn, and sides turned down 90°. Open front with 1¼" O.D. galvanized tubular crossbracing on sides and rear. Top reinforced with hat channels and sound deadened. Constructed with uni-lok® patented gusset system with the gussets recessed into the hat channels to reduce lateral movement. Legs are 1½" O.D. galvanized tubing with galvanized gussets and 1" hi-impact plastic bullet feet.



*worktable with upturn
and tubular base*

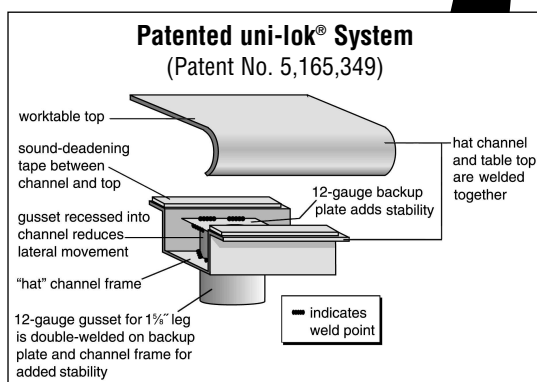

Worktables with Rear Upturn and Galvanized Tubular Base —Deluxe Series

MODELS:

☐ BPT-2424GTEB-UT	☐ BPT-2484GTEB-UT	☐ BPT-3060GTEB-UT
☐ BPT-2430GTEB-UT	☐ BPT-2496GTEB-UT	☐ BPT-3072GTEB-UT
☐ BPT-2436GTEB-UT	☐ BPT-3024GTEB-UT	☐ BPT-3084GTEB-UT
☐ BPT-2448GTEB-UT	☐ BPT-3030GTEB-UT	☐ BPT-3096GTEB-UT
☐ BPT-2460GTEB-UT	☐ BPT-3036GTEB-UT	
☐ BPT-2472GTEB-UT	☐ BPT-3048GTEB-UT	

Tabletop

- Top reinforced with welded-on hat channel.
- Sound-deadened between top and channels.
- 1½" (38mm) 90° rear upturn with radius at intersection.
- 1½" (38mm)-diameter 180° rolled edge on front. Ends are turned down 90°, providing for flush installations when required.
- 16 gauge 300 series polished stainless steel.

Crossbracing—1¼" (38mm)-diameter

- Heavy gauge, galvanized.
- Aluminum castings join rear and side crossbraces with legs.

Legs—1½" (41mm)-diameter

- Units 96" to 120" (2438 to 3048mm) long come with six legs; Units 132" and 144" (3353 and 3658mm) come with eight legs.
- Patented uni-lok® gusset system (patent #5,165,349) is recessed into channel, reducing lateral movement.
- Heavy gauge galvanized steel.
- Galvanized gussets.
- 1" (25mm) adjustable hi-impact plastic feet*.

* Optional casters available. Consult factory.

BlendPort®

An Eagle Group Company

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 800-441-8440 • Fax: 302-653-2065


Certifications / Approvals




Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Worktables with Rear Uprturn and Galvanized Tubular Base —Deluxe Series


**For custom sizes - fill in required dimensions in layout provided

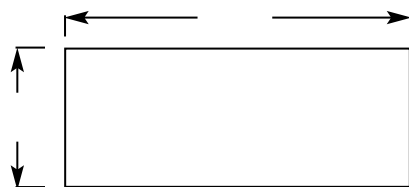

TOP VIEW

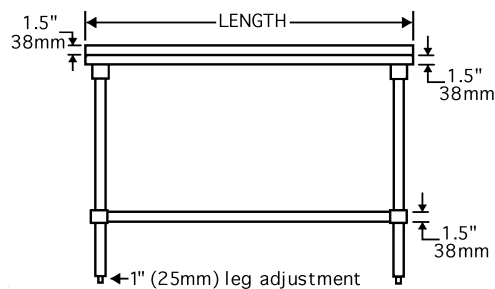

FRONT VIEW

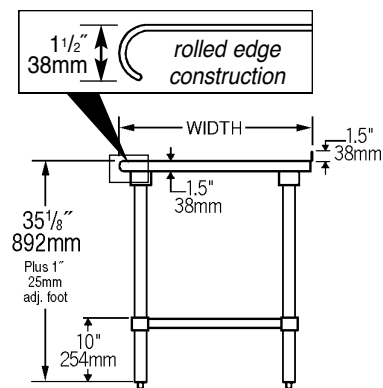

SIDE VIEW

model #	# of legs	width		length		weight	
		in.	mm	in.	mm	lbs.	kg
BPT-2424GTEB-UT	4	24"	610	24"	610	40	18.1
BPT-2430GTEB-UT	4	24"	610	30"	762	45	20.4
BPT-2436GTEB-UT	4	24"	610	36"	914	50	22.7
BPT-2448GTEB-UT	4	24"	610	48"	1219	60	27.2
BPT-2460GTEB-UT	4	24"	610	60"	1524	70	31.8
BPT-2472GTEB-UT	4	24"	610	72"	1829	80	36.3
BPT-2484GTEB-UT	4	24"	610	84"	2134	90	40.8
BPT-2496GTEB-UT	6	24"	610	96"	2438	100	45.4
BPT-3024GTEB-UT	4	30"	762	24"	610	45	20.4
BPT-3030GTEB-UT	4	30"	762	30"	762	50	22.7
BPT-3036GTEB-UT	4	30"	762	36"	914	53	24.0
BPT-3048GTEB-UT	4	30"	762	48"	1219	57	25.9
BPT-3060GTEB-UT	4	30"	762	60"	1524	67	30.4
BPT-3072GTEB-UT	4	30"	762	72"	1829	77	34.9
BPT-3084GTEB-UT	4	30"	762	84"	2134	87	39.5
BPT-3096GTEB-UT	6	30"	762	96"	2438	97	44.0

BlendPort®

An Eagle Group Company

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 800-441-8440 • Fax: 302-653-2065

 Printed in U.S.A.
 ©2020 by Eagle Group

Rev. 05/20

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.