BEVERAGE-AIR

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DUAL TEMPERATURE REFRIGERATOR/FREEZER

HBRF72HC Glass Door Bottom Mount Reach-In Hydrocarbon Series



5 Year Parts/Labor Warranty Available

7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- Stainless steel interior
- Full electronic control with one-touch defrost
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Left: refrigerator single section
- Right: freezer double section
- One-piece grille allows easy removal/installation for preventative maintenance
- Self closing doors, 120° stay open feature with spring-loaded style hinges
- Snap-in magnetic door gaskets for easy cleaning and replacement
- Nine (9) heavy-duty epoxy coated wire shelves
- LED lighting standard
- 6" Heavy-duty casters with (2) brakes
- · Certified for open food product

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Epoxy shelves
- Door locks
- Shelf clips
- 3" Casters or 6" legs
- Wine temperature control
- Door swing orientation (at time of order)
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerator maintains product temperatures between 36°F to 38°F
- Freezer maintains product temperature to -10°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

MODEL:


HBRF72HC-1-B-G



MODEL	HBRF72HC-1-B-G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	75"	
Depth Overall (with handles)	33 ½"	
Height Overall (with casters)	84 1⁄8"	
Number of Doors	3	
Depth with Door Open 90°	55 ½"	
Door Openings (in)	21 1⁄8" x 52 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	(R) 19.62 (F) 44.85	
Internal Width Overall (in)	(R) 22" (F) 47"	
Internal Depth Overall (in)	28 1⁄2"	
Internal Height Usable (in)	55"	
Number of Shelves	9	
ELECTRICAL DATA		
Full Load Amperes	(R) 2.88 (F) 10.0	
REFRIGERATION DATA		
Horsepower	(R) 1/4 (F) 3/4	
Capacity (BTU/Hr)	(R) 1702 (F) 2772	
Heat Rejection (BTU/Hr)	6711	
Charge (lbs/grams/ounce)	(R) 0.1985 / 90 / 3.18 (F) 0.2204 / 100 / 3.53	
SHIPPING DATA		
Gross Weight - Crated	762 lbs	
Height - Crated	88"	
Width - Crated	77"	
Depth - Crated	45"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Dual Temp Bottom Mount Reach-In Glass Door Refrigerator/Freezer Model: HBRF72HC-1-B-G

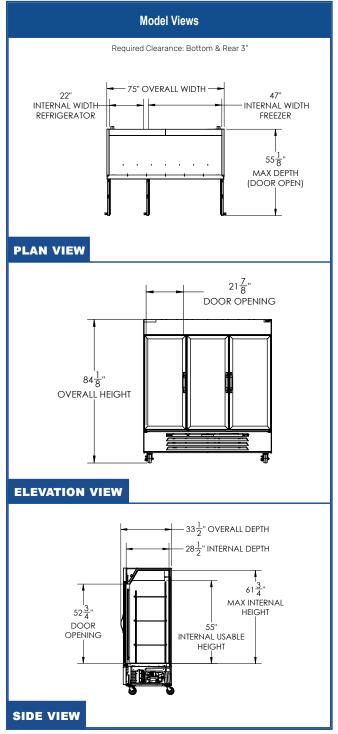



ELECTRICAL CONNECTION



115/60/1 Unit pre-wired at factory (2) NEMA 5-15P and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company

