

# Glass Door Bottle Cooler

Model No.

**BB2-24G-HC**



**BB2-24G-HC**

## Features:

- CFC free refrigerant and foam
- Electronic thermostat and digital led temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tools
- Stainless steel top
- INTERIOR: powder-coated steel white, bottom S/S 304
- EXTERIOR: powder-coated steel black
- Unit ships with 5" casters, not installed

## Warranty Info:

### Two Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

### Three Year

- Additional Compressor, Part Only.

Revised 06/17/2021

**BB2-24G-HC**



Intertek




Intertek



www.servware.com

Phone:(800).768.5953

Fax:(800).976.1299

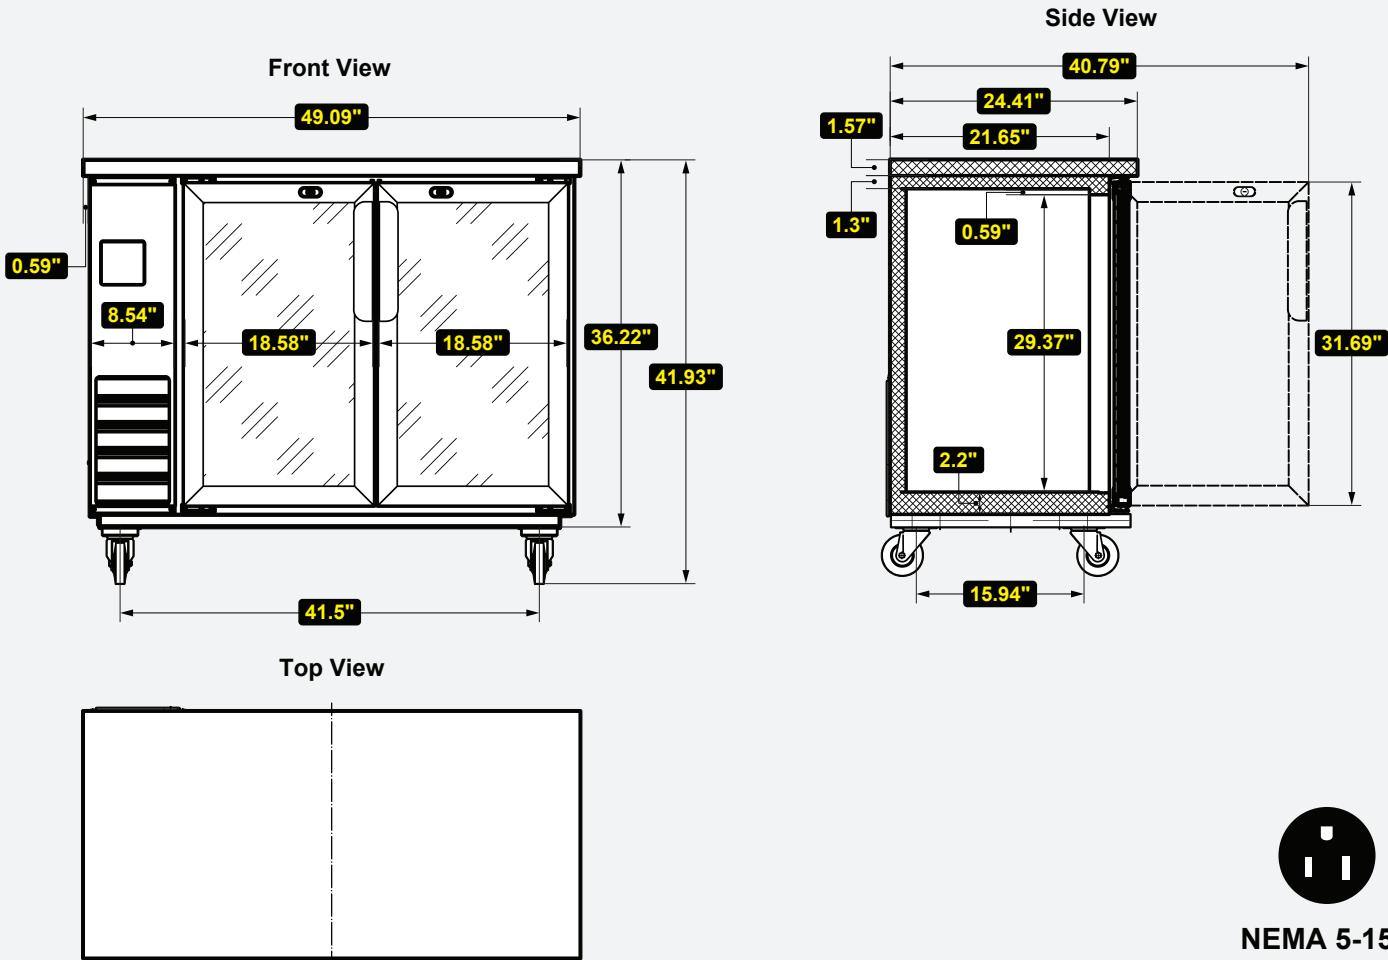

**NEMA 5-15P**

➤ **Technical Information:**

MODEL #	DESCRIPTION	DIMENSIONS	WEIGHT/LBS.
		( W x D x H )	(Shipping)
BB2-24G-HC	49 in. Unit	49.1" W x 24.4" D x 36.2" H	301 lbs.

CONSTRUCTION	
Exterior Material	Painted Steel
Interior Material	Painted Steel
Insulation Material	CFC Free Foam
Shelf Material	PVC Coated Wire
Number of Shelves	1 per Door

COOLING	
Temperature Range	33°F – 41°F
Refrigerant+Charge oz.	R290 / 0.00 oz.
BTU/H	1155
Defrosting	Every 6 Hours
Horse Power	2/5
Storage Capacity	10 cu. ft.

ELECTRICAL	
Voltage	115
Amps	3
Hz	60
Phase	1

**ADDITIONAL INFORMATION**

*Installation by certified commercial restaurant equipment installer recommended. Inspection before and after installation by licensed electrician for safe operation. Product designed for interior usage in a climate controlled location with adequate air circulation and not adjacent to a high temperature source.*



Prop. 65 Warning for California Residents  
 WARNING: This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

