DESIGNER LINE SLIM LINE REFRIGERATOR

Model: D2RSESN

Natural Refrigerant R-290 Model



2-Section Slim Line Reach-In Refrigerator - Shallow Depth

D2RSESN - Stainless steel front, aluminum end panels and interior

D2RSESNSA - Stainless steel exterior, aluminum interior

D2RSESNSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

(aponal go and road amoo may apply)		
Stainless steel case back	Casters	
Additional epoxy coated steel shelves	Custom laminates	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Standard depth (consult factory)	Correctional Facility Options	
Half doors	One way security screws	
Rehinging of doors (consult factory)	Locking hasp (lock not included)	
Wine rack	Stainless steel mesh cover	
	Coverless hinges	

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Location.		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system (coil in the cabinet zone)

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Will accommodate 12 x 20 pans

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 24 (680 cu I) Width, Overall (inches) 36 ½ (921 mm) Depth, Overall (inches) 29 1/4 (743 mm) (including handles) Depth (inches) (less doors) 25 % (657 mm) Depth (inches) (doors open 90°) 41 1/4 (1048 mm) Clear Door Width (inches) 12 % (327 mm) Clear Door Height (inches) 58 % (1489 mm) Height, Overall (inches) 83 1/4 (2115 mm) (including 6" legs) 2 Number of Doors Number of Shelves 6

REFRIGERANT DATA

Shelf Area (square feet)

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2190

24.4 (2.3 sq m)

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	8.1 (4.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	42 (1067 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	84 (2379 cu I)
Weight Std - Crated (pounds)	430 (195 kg)
Weight SS - Crated (pounds)	520 (236 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

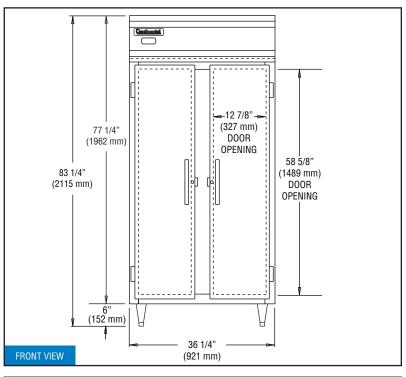

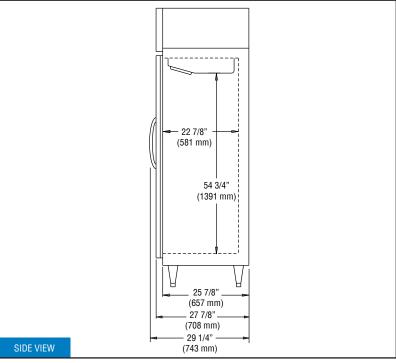

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.