

PBF-850-TS-CAB-1DR, 2-Rack 850 lbs Blast Chiller & 510 lbs Shock Freezer

BLAST CHILLER/FREEZER SPECIFICATIONS

The standard modular blast chiller and shock freezer solution includes the panel walk-in, evaporators, and condensing unit. The high-capacity unit is well suited to a high-volume professional kitchen workflow, making it possible to improve your kitchen efficiency and food quality while staying within HACCP guidelines.

Standard features include a NEW advanced touch screen controller with USB port, holding cycle (once your cycle is completed the unit automatically switches over to a cooler), a single point product core probe, and up to 99 customized recipe programs.

Touch screen controller



**PBF850-TS
P/N 4109**

EVAPORATOR OUTSIDE DIMENSIONS

(per evaporator coil)

28.8" W x 16.67" D x 72.08" H

OUTPUT CHILLING CAPACITY*

850 lbs within 90 minutes

OUTPUT FREEZING CAPACITY*

510 lbs in 240 minutes

OUTPUT THAWING CAPACITY*

0°F/38°F 170 lbs within 240 minutes

0°F/38°F 340 lbs within 480 minutes

0°F/38°F 510 lbs within 720 minutes

REFRIGERANT:

R448A

HEAT LOAD BTU/HR:

79,380/-10°F SST/+95°F ambient

ELECTRICAL SUPPLY:

1 PH/208-240 V/60 Hz

20 A circuit, # 12 wire required

STANDARD FEATURES

- New advanced 7" Gorilla glass touch screen controller with USB port on easy-to-use control panel
- Holding cycle: automatically switches over to holding mode after each cycle is completed
- One single point product core probe registers product temperatures
- Meets the demands of HACCP guidelines for proper food chilling
- Automatic air defrost
- Evaporator is enclosed in a frame and cabinet
- Programmable controller with up to 99 customized options
- Electric thawing heaters

WARRANTY

- Two years warranty on parts and labor
- Compressor warranty 3-5 years (parts only)

A COMPLETE SOLUTION


The package includes a PrepRite™ walk-in, perfectly designed to fit your blast chiller/freezer needs. The walk-in is available with 1 or 2 doors, external ramp, 8" deep interior ramp designed to accommodate two roll-in racks at 32" x 32" x 74" each and features our exclusive anti-bacterial Sanisteel interior metal finish.

It also includes an air cooled, remote, outdoor condensing unit as standard. Other condensing unit options, including indoor and water-cooled models are available on request.

Note: * Performance ratings for this unit are based on exterior dimensions of 64.5" W x 87" D x 88"H. Your performance results may vary based on the interior dimensions of your unit and the characteristics of the food being processed. Contact your regional sales person for more information.

Notes: The installation of the blast chiller/freezer and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice.

PBF-850-TS-CAB-1DR, 2-Rack 850 lbs Blast Chiller & 510 lbs Shock Freezer

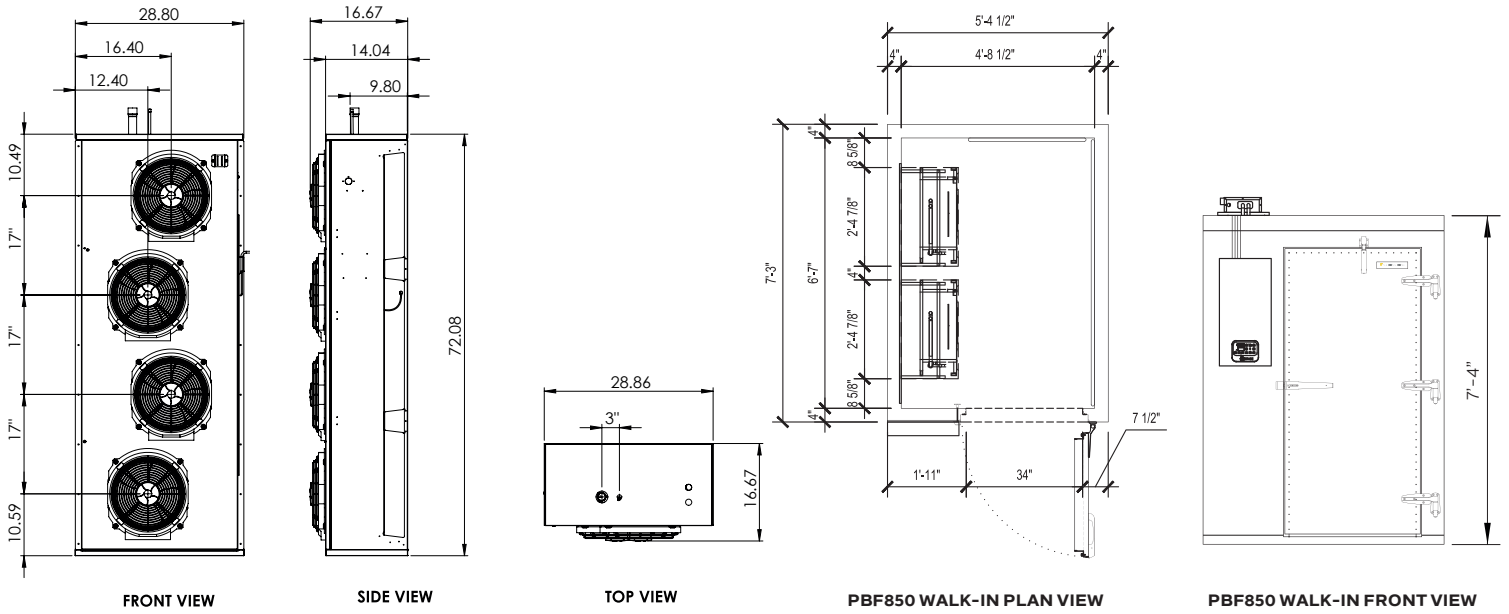

PBF850-TS includes two evaporator coils


EVAPORATOR MODEL		DIMENSIONS			
PBF850-TS 4109	OUTSIDE		HEIGHT	SHIPPING	
	WIDTH	DEPTH		DIMENSIONS	WEIGHT
	28.8"	16.67"	72.08"	81" x 41" x 19.5"	400 lbs

PBF850 WALK-IN DIMENSIONS (ins)		
WIDTH	DEPTH	HEIGHT
64.5	87	88

MAXIMUM LOAD PER CYCLE		ELECTRICAL DATA					REFRIGERATION DATA		
Chill	Freeze	Volts	Hz	Phase	Amps	Circuit Amps	Refrigerant	Suction Line	Liquid Line
850 lbs	510 lbs	208-240	60	1	14.4	20	R448A	1.38	0.38

OUTDOOR REMOTE CONDENSING UNIT PBF-850-R448-CU-208/230 P/N 5915

All dimensions in inches

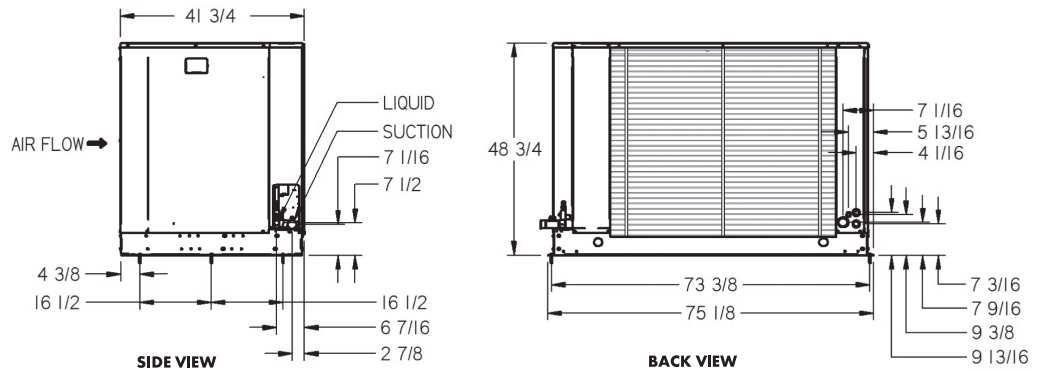

ELECTRICAL DATA – SUPPLY 3 PH/208-240 V/60 Hz											
Compressor(s)					Fan Motor(s)						
RLA	LRA	Qty.	Hp	FLA	Defrost Type	High or Low Amps	Contactors	MCA	MOPD	Evap. Fan Amps	Defrost Heater Amps
47.2	278	2	3/4	4.4	Air Defrost	N/A	N/A	67.8	110	N/A	N/A

UNIT SPECIFICATIONS									
Refrigerant	Connections (ins)		Receiver 90% Full (lbs)		Fan Blade(s) Dia. (ins)	Sound Data (dB)	Approx. Net Weight (lbs)	Shipping Weight (lbs)	Shipping Dims. (ins) L x W x H
	Liquid Line	Suction	Standard	Oversized					
R448A	0.875	1.625	87	98	24	82	1234	1491	41.75 x 75.125 x 48.75

Notes: The installation of the blast chiller/freezer and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice



CROWNTONKA ICS LOTEMP DOORS PREPRITE THERMALRITE

Proud to be family-owned.

