



Welcoming

a sustainable approach to merchandising

Introducing the next generation of full-sized grocery merchandiser, True's Retail Merchandiser (TRM) is an advanced self-contained cabinet built for large storage capacity and exceptional product display.



The TRM refrigeration system is charged and sealed at the factory using R290 refrigeration, a natural, environmentally friendly future proof refrigerant.

Design

- True's commitment to using the highest quality materials and energy efficient refrigeration systems provides the user with colder product temperatures and lower utility costs.
- Take advantage of the install flexibility, convenience, and efficiency of this self-contained case. Fit TRM's through doorways, move the case into location, install the compact sealed condensing systems and plug it in. No refrigeration connections or technicians needed for install.
- Available in 2,3, and 4 door models, the TRM's are ideal for multi-door case lineups, end cap placements, and general refrigeration storage applications.
- The entire cabinet structure is built using high-density, polyurethane insulation that has zero ozone depletion potential.
- Refrigeration redundancy architecture helps prevent product loss.

Refrigeration System

- With the R290 Natural Refrigeration system, TRM is exempt from changing state and federal regulations.
- Environmentally friendly R290 Natural Refrigerant system.
- Self-contained factory-charged and sealed refrigeration system.
- The True Dynamic Refrigeration Response System allows for quick product pull down where and when cooling demand is needed.
- DOE and Energy Star approved.


Accessories

- Peg-bar shelf for organized display of hanging products

FEATURES

Electrical

- Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included.



Innovation

- Reverse condensing fan motor (RCU) technology helps prevent condenser blockage.
- Patented True Level leveling systems for a quick install.
- Plug-and-play electrical system for seamless installation (No refrigeration tech or electrician needed).
- High Efficiency Variable Speed Compressor Technology.

Doors

- Self closing doors with stay open feature.
- "Low-E" triple pane thermal insulated glass door.
- Viewable glass height of 70" for maximum product display.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

LED Lighting

- 4000k color temperature LED interior lighting, provides brilliant lighting throughout the cabinet.

Shelving

- Total of 10 (5 per door) adjustable, solid white powder coated cantilever shelves 30W" x 25D".




PLAN VIEWS


Cabinet illustrated includes the (NN) end panel.

PHYSICAL DATA	
LED Color Temperature	4000k
# Of Refrigeration Decks	2
Usable Capacity Cubic Ft	77.9
Internal Dimensions	62 3/16" x 31" x 68 1/8"
Cabinet Dimensions	67 1/2" x 39 7/8" x 102"
Door Type	Glass
Crated Weight (lbs)	1020
Interior Finish	White Aluminum
External Finish	Black Aluminum
Shelf Type Design	Cantilever
# Of Full Shelves	10
Full Shelf Dimensions	30 3/16" W x 25" D
Castors Legs/ Levelers	Leg Levelers
Stay Open Door Feature	Yes
ELECTRICAL & ENERGY DATA	
Daily Energy Use (Kwh/Day)	19.5
Energy Star Certified	Yes
Condenser Type	Air Cooled
Rejected Heat (Btu/h)	4841
Horse Power (Per Deck)	2 1/2 (2 x 1 1/4)
Total Amps	13.8
Cord Length	10'
Electrical Plug	NEMA-L6-20P
REFRIGERATION DATA	
Refrigerant Charge (per deck)	10.5oz (5.25 x 2)
Refrigerant	R290
Min. Temperature	-10°
Max. Temperature	6°
END PANEL CONFIGURATION	OVERALL COMBINED LENGTH (IN)
TRM2-NN	67 1/2
TRM2-YN	66 3/8
TRM2-NY	67 1/2
TRM2-YY	66 3/8
PANELS: N = 2 1/2" (End panel) Y = 1 1/2" (In-line panel)	


FRONT VIEW

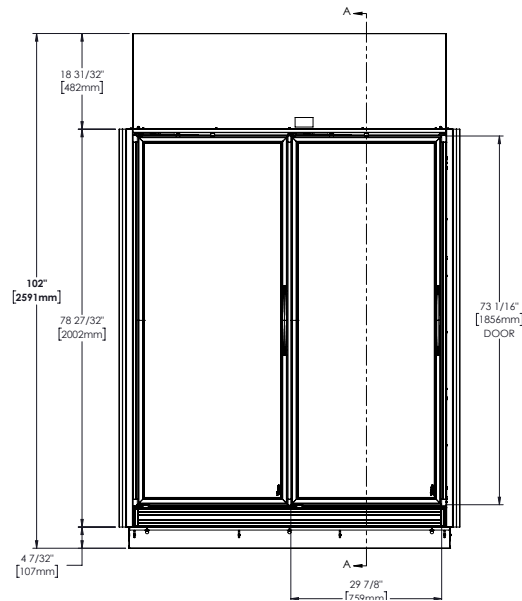


SIDE VIEW

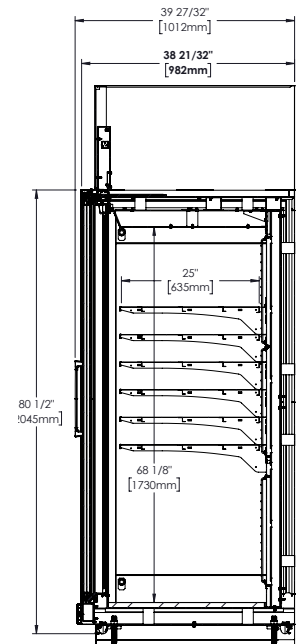


TOP VIEW

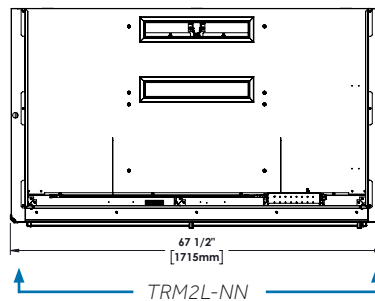

TRM NOMENCLATURE

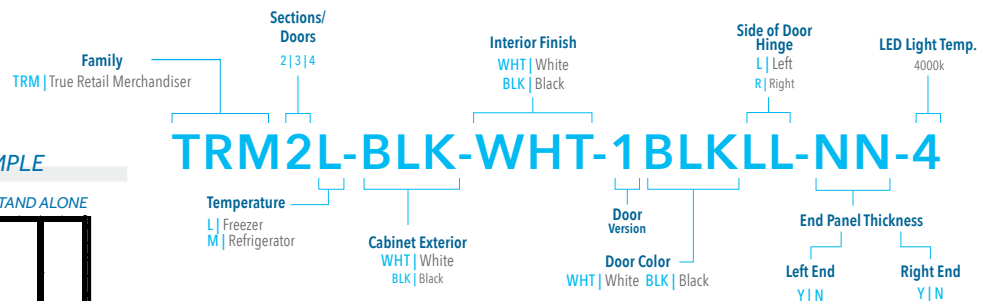

END PANEL CONFIGURATION EXAMPLE

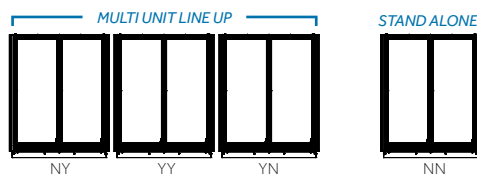

BC_202953_1.23

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



truemfg.com

