

Project:



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CR-2SW-PB Countertop




Chilled water on tap

- Push button dispensing for chilled still water on 2 valves
- European design, mirrored finish stainless steel exterior
- Made in the USA

Specifications

- 68 liters/18 gal per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/3 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,400 per hour Ave
- Operating temperature range: 40°-100°
- Electrical: 120v - 15 Amps
- Water bath: 6 Gallons
- Ice bank: 25 lbs
- Weight: 135 lbs
- Clearance: 12"
- 20"W x 26"D x 24.75"H

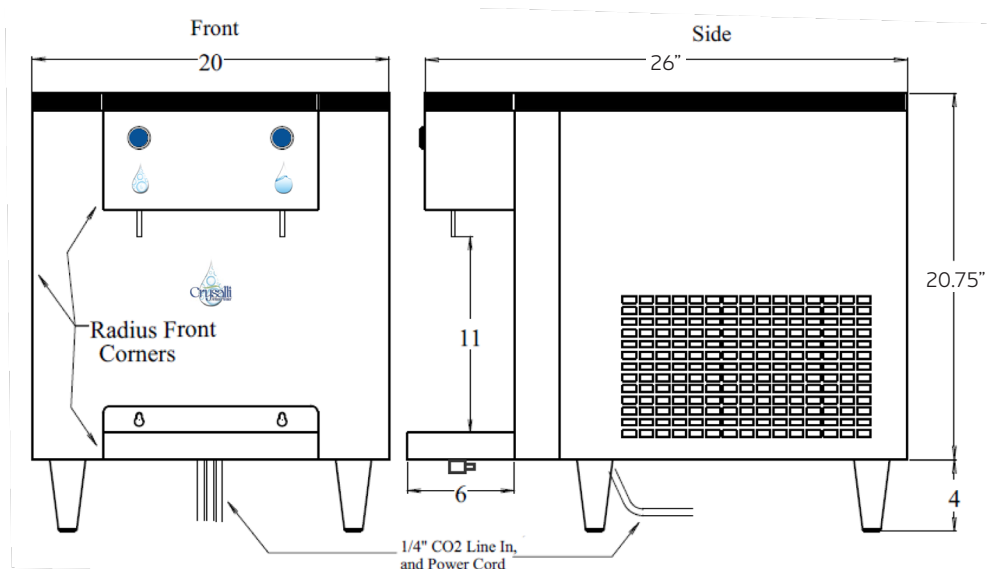

- 3/8" Water inlet connector
- 7' Over flow drain hose
- 9' Electrical cord NEMA 5-15
- 4" legs
- Air intake at rear with air filter
- Allow for 6" rear & side clearance around unit for air flow

Accessories:

- CR-24FCP with Prefilter
 - CR-24FC without Prefilter
- Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration
- CR-KIT-SWCT
- Installation Kit for Countertop Still water chillers, CR-1SW & CR-2SW, Includes: Various fittings and oetiker clamps, and extra tubing
Still Water units only

