




COMMERCIAL REFRIGERATOR
KOOLMORE SUPPLY INC.

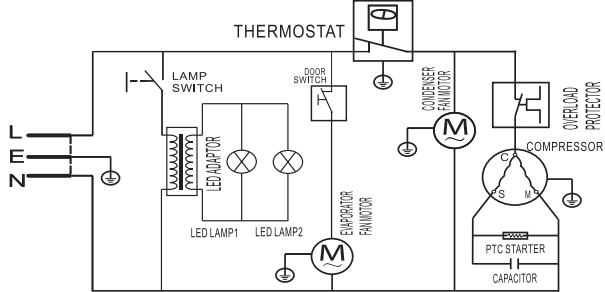

Model	KM-MDR-1GD-12CWH	Design Pressure	Low-Side:130psig
Rated Voltage(V)	115	Insulation Blowing Gas	CYCLOPENTANE
Rated Frequency(Hz)	60	Rated Current (A)	2.7
Refrigerant(oz)for each cycle	R600a/2.1	Climate Type	3,4,5
Design Pressure	High-Side:300psig	Lamp Power(W)	8W+5W
Date Of Manufacture		Serial NO.	

CONFORMS TO NSF STD.7
CONFORMS TO UL STD .
60335-1&60335-2-89
CERTIFIED TO CSA STD.C22.2
NO.60335-1&60335-2-89



Intertek
3133249



Refrigerant Class A3

This equipment is intended for the storage and display of non-time/temperature control for safety foods bottled or canned products only.
This equipment is intended for the storage and display of non-potentially-hazardous packaged products only.



Koolmore Supply Inc.
706 Eastern Parkway STE 1G
Brooklyn NY 11213

For any service-related issues, please contact us:
718-576-6342 support@koolmore.com

140.00 mm

100.00 mm

出口美国ETL认证铭牌 KM-MDR-1GD-12CWH.5.2-1
亚银彩印 尺寸100x140mm

技术要求：

1. 图纸版面、字体如上图1：1所示, 尺寸为成品的外形尺寸.
2. 印刷内容正确清晰, 不可存在条杠, 如无特别颜色描述，统一印刷为黑色.
3. 覆膜后成品要求用湿布擦拭15秒, 随后用沾有汽油的布擦拭15秒后内容仍保持清晰.
4. 贴纸背面为不干胶涂层, 要求涂层均匀，用轻微压力即可粘贴牢固.
5. 模切成品极限误差±0.5mm, 成品整洁、无脏污、残缺.
6. 条码、二维码必须要可以扫描.

表面处理	胶水类	材质类别	XINGX 浙江星星冷链集成股份有限公司				
覆膜 ☒	不干胶 ☒	艾利铜\80g ☐	编制	创建日期	修改日期	审核	日期
不覆膜	可移胶 ☐	涤纶纸\5番 ☒	陈莉	20231111			
	轮胎胶 ☐	合成纸\7.5番 ☐	图 纸 编 号				
	无胶水 ☐	透明PET\8番 ☐					
		铜版纸\250g ☐					
		☐					
		☐					