



Product Specifications

18" Refrigerators / Wine Refrigerators

- Adjustable interior with 19 possible positions for shelves, wine racks, and bin accessories
- Designed for built-in or freestanding applications
- Wine refrigerator models include 5 slide-out wine racks
- Refrigerator models include 2 slide-out metal shelves



VCRE518-SG33A



VCRE518-SS33A



VCWC518-SG33A



VCWC518-SS33A

| Model | Description | Voltage/Hz | Shipping Weight |
|---------------|---|-------------|-----------------|
| VCRE518-SG33A | Refrigerator 18" Reversible Hinge Glass Door | 115v / 60hz | 131 lb |
| VCRE518-SS33A | Refrigerator 18" Reversible Hinge Solid Door | 115v / 60hz | 118 lb |
| VCWC518-SG33A | Wine Refrigerator 18" Reversible Hinge Glass Door | 115v / 60hz | 134 lb |
| VCWC518-SS33A | Wine Refrigerator 18" Reversible Hinge Solid Door | 115v / 60hz | 121 lb |

Specifications

VCRE518-SG33A dimensions: 33 1/16" H x 17 3/4" W x 22 15/16" D

VCRE518-SS33A dimensions: 33 1/16" H x 17 3/4" W x 22 15/16" D

VCWC518-SG33A dimensions: 33 1/16" H x 17 3/4" W x 22 15/16" D

VCWC518-SS33A dimensions: 33 1/16" H x 17 3/4" W x 22 15/16" D

Adjustable bright white or blue LED lighting

Convection cooling system provides a quick cool down and consistent temperature

Environmentally friendly R600a refrigerant: VCRE518-SG33A: 1.23 oz / VCRE518-SS33A: 1.34 oz / VCWC518-SG33A: 1.23 oz / VCWC518-SS33A: 1.34 oz

Full-depth lower interior with a volume of 3.7 cu ft

High efficiency variable speed compressor

NSF/ANSI Standard 7 compliant


Stainless steel cabinet, grille, and full-wrap door with lock

Temperature range: 34°F – 70°F


| Accessories | Description | Shipping Weight |
|----------------|-----------------------|-----------------|
| ULACASTERKIT18 | 18" Caster Kit | 13 lb |
| ULAWINERACK18 | Slide-out Wine Rack | 8 lb |
| ULABIN18 | Slide-out Bin | 9 lb |
| ULASHELF18 | Slide-out Metal Shelf | 4 lb |




Top

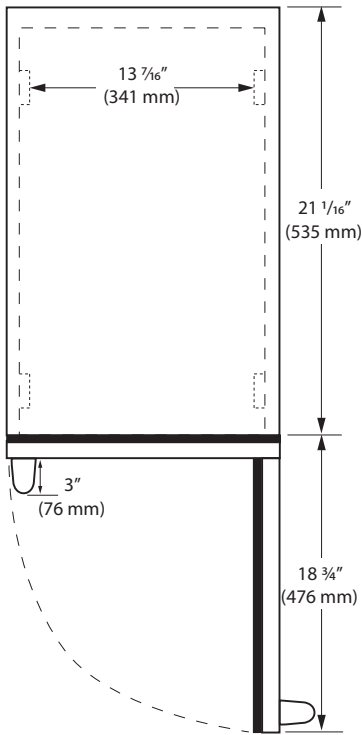


Front

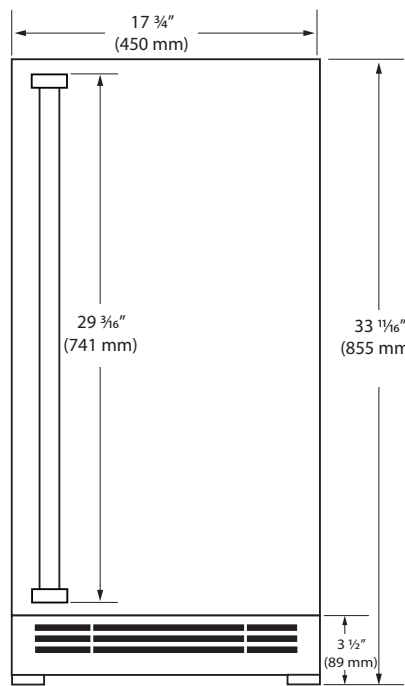


Side

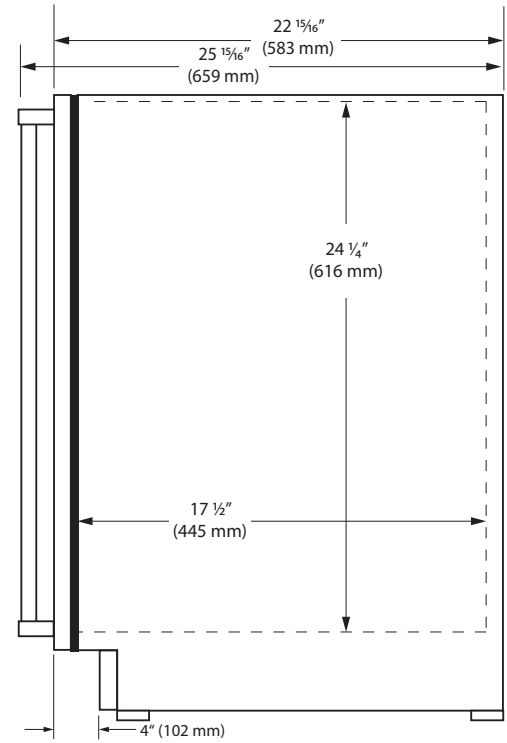

Back

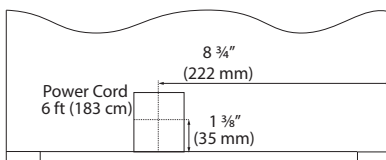

Cabinet Cut-Out

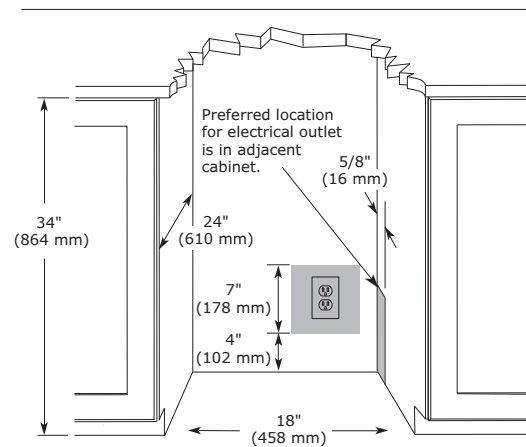

Commercial Warranty

1 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Installation Notes

- Power cord extends 2" beyond total depth
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow