



7750 Georgetown Road  
Indianapolis, IN 46268  
800-289-3637 • Fax 800-882-0086

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

www.CentralRestaurant.com

# REACH-IN FREEZERS

Model:  69K-034     69K-035     69K-036



69K-034



69K-035



69K-036

Central Reach-In Refrigerators keep frequently accessed ingredients within reach and at the proper storage temperature to preserve freshness and prolong shelf life. Capacity options range from 23 to 72 cubic feet. Single or multi-door models are available to accommodate various volume requirements. Each reach-in refrigerator is constructed from stainless steel and has features that are meant to meet high-demand applications, including an oversized refrigeration system, door operated interior LED lighting and self closing doors.

### FEATURES

- Top-mounted refrigeration system
- Oversized evaporator and condensing unit for quick cooling, temperature recovery and energy efficiency
- Self-contained, energy efficient refrigeration system
- Automatic, programmable defrost system
- Automatic interior LED lighting
- Open door alert, beeps when door has been inadvertently left open
- Hinged, self closing doors with recessed handles
- Door locks for security
- 4" diameter swivel casters (2 with brakes – shorter casters are an available option)
- Integral condensate evaporator eliminates need for a floor drain connection


### TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to -12°C)
- Comes factory set to -4°F (-20°C)
- Digitally controlled system maintains optimum temperature
- LED temperature display is easily viewed up to 15 feet away

### CONSTRUCTION

- Exterior Material: Stainless Steel
- Interior Material: White, Painted Aluminum
- Comes with 6' NEMA 5-15 (-034/-035) or L14-20 (-036) Cord Set
- Shelving: Heavy duty PE coated wire shelves.
  - 69K-034 Three (3) Shelves
  - 69K-035 Six (6) Shelves – 3 per door section.
  - 69K-036 Nine (9) Shelves – 3 per door section.

**REFRIGERANT**  
CFC & HCFC free R-404A



**ELECTRIC**  
69K-034/ 69K-035: 120V/60Hz/1 Ph (NEMA 5-15P)  
\* Plugs into conventional 115V wall outlet  
Circuit requires appropriate overload protection of 15 amp breaker or fuse  
69K-036: 208-230V/60Hz/1 Ph (NEMA L14-20)  
\* Requires a 20 amp breaker, designated circuit

Certified to  
ANSI-NSF 7

Certified to  
ANSI UL 471

Environmentally  
Friendly


DOE 2017  
Compliant

**WARRANTY (USA / CANADA)**  
Three (3) year parts and onsite labor  
Five (5) year compressor  
Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.


# REACH-IN FREEZERS

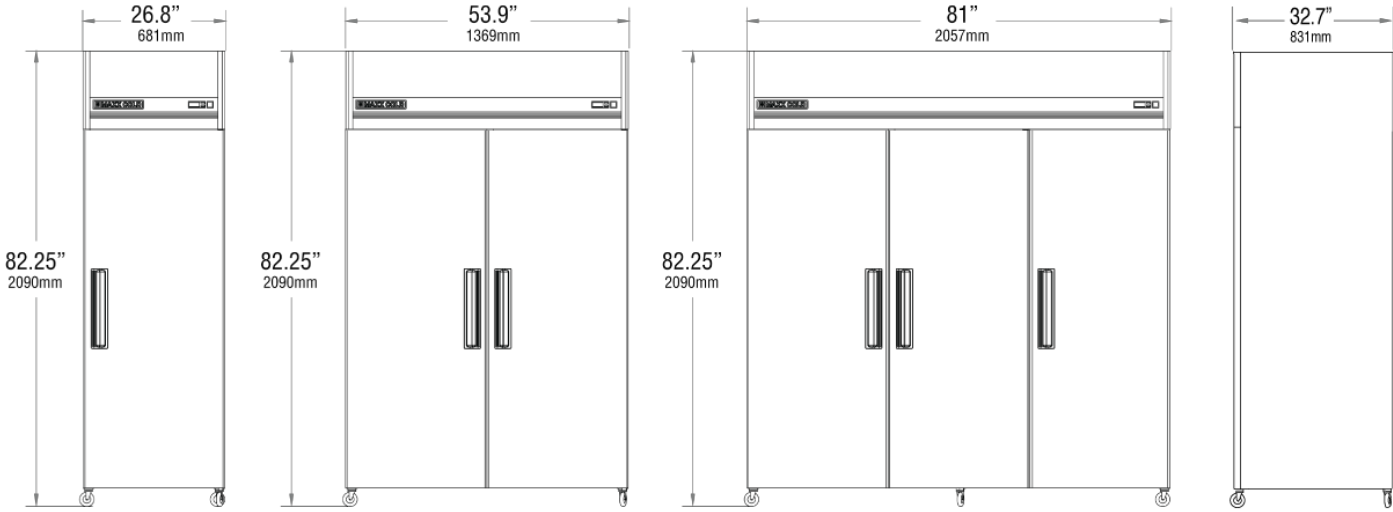

69K-034

69K-035

69K-036

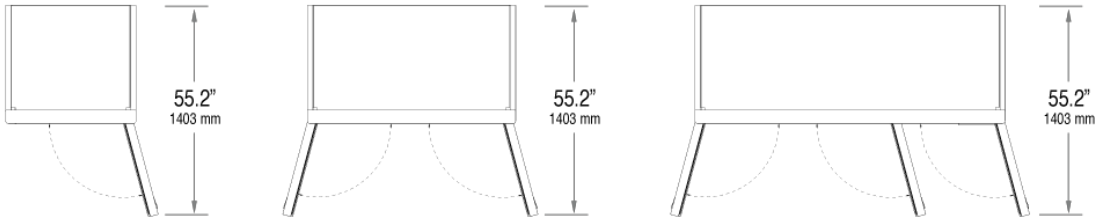

	69K-034	69K-035	69K-036
	** Dimensions include Standard Caster Height**		
<b>In: External Dimensions W x D X H</b>	26.8 x 32.7 x 82.25	53.9 x 32.7 x 82.25	81 x 32.7 x 82.25
<b>mm: External Dimensions W x D X H</b>	681 x 831 x 2090	1369 x 831 x 2090	2057 x 831 x 2090
<b>In: Internal Dimensions W x D X H</b>	21.9 x 26.5 x 52.1	49.1 x 26.5 x 52.1	76.1 x 26.5 x 52.1
<b>mm: Internal Dimensions W x D X H</b>	556 x 673 x 1324	1246 x 673 x 1324	1933 x 673 x 1324
<b>Capacity</b>	23 Cu Ft / 651 L	49 Cu Ft / 1,387 L	72 Cu Ft / 2,039 L
<b>Hinged Doors</b>	1	2	3
<b>Shelves</b>	3	6	9
<b>Max Amp Draw</b>	11	12	8.8
<b>Electrical Service</b>	115V/60Hz/1Ph	115V/60Hz/1Ph	230V/60Hz/1Ph
<b>Provided NEMA Cord Set</b>	5-15	5-15	L14-20
<b>Unit Weight</b>	305 lb / 138 kg	468 lb / 212 kg	563 lb / 255 kg
<b>Shipping Weight</b>	336 lb / 153 kg	502 lb / 228 kg	601 lb / 273 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.