

Reach-in Refrigerator / Freezer

SOLID DOOR REFRIGERATOR
SOLID DOOR FREEZER



The Asber AWR series reach-in refrigerators and freezers are engineered to provide exceptional value without compromising on durability and performance. These units offer an impressive 23 cubic feet of nominal capacity (19.1 cu. ft. actual), maximizing storage efficiency in commercial kitchen environments. The exterior features a sleek stainless-steel front, complemented by resilient gray side panels and a galvanized back, striking a balance between aesthetics and practicality.

Inside, the AWR series boasts NSF-approved white coated steel walls, ensuring easy cleaning and maintenance. The sturdy stainless-steel floor further enhances the unit's robustness and sanitation capabilities. Asber's commitment to safety and hygiene is evident in every aspect of the design, setting a high standard for food service equipment.

Thermal efficiency is paramount in refrigeration, and the AWR series excels in this regard. It utilizes the industry-leading Ecomate™ insulation, known for its superior Global Warming Potential (GWP) and Ozone Depletion Potential (ODP) ratings. At 2 inches thick, this insulation provides the highest R-value efficiency, ensuring optimal temperature control and energy conservation.

User-friendly features abound, including an ergonomically designed full-length door handle and an in-step interior that creates a superior seal to prevent sweating. The magnetic one-piece door gasket can be removed without tools, simplifying cleaning and replacement procedures.

In line with eco-friendly innovations, the AWR series employs R-290 Hydrocarbon refrigerant. This advanced refrigerant meets the DOE's Energy Conservation standards while minimizing environmental impact with its low global warming contribution (ODP-0, GWP-3).

ADDITIONAL FEATURES TO INCLUDE

- Door locks with universal key
- Hermetic compressors with epoxy coated evaporator.
- Accepts 18" x 26" sheet pans
- Field reversible door
- Automatic evaporator: paper fins not utilized in the evaporation process.
- Electronic controller with digital display.
- Refrigerator Temperature: 32 °F to 38 °F based on an external environment of 100°F and 65% RH.
- Freezer temperature: 0° F to -8 °F based on an external environment of 100°F and 65% RH
- Standard with 2.5" castors, front with brakes
- Meets the NSF-7 standard for food safety



AWRR-23



AWRR-23

MODEL	DOORS	SHELVES	CAPACITY ft ³	VOLTS - FREQUENCY	POWER HP	AMP	EXTERIOR DIMENSIONS (in)			SHIPPING	
							Width	Depth	Height	Lbs	ft ³
SOLID DOOR REFRIGERATOR											
AWRR-23	1	4	23.0	115V. - 60 Hz.	1/4	2.5	30-1/2	28-3/8	77-5/8	293	53.0
SOLID DOOR FREEZER											
AWRF-23	1	4	23.0	115V. - 60 Hz.	1/2	5.0	30-1/2	28-3/8	77-5/8	293	53.0


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.

Reach-in Refrigerator / Freezer

SOLID DOOR REFRIGERATOR
SOLID DOOR FREEZER



AWRR-23

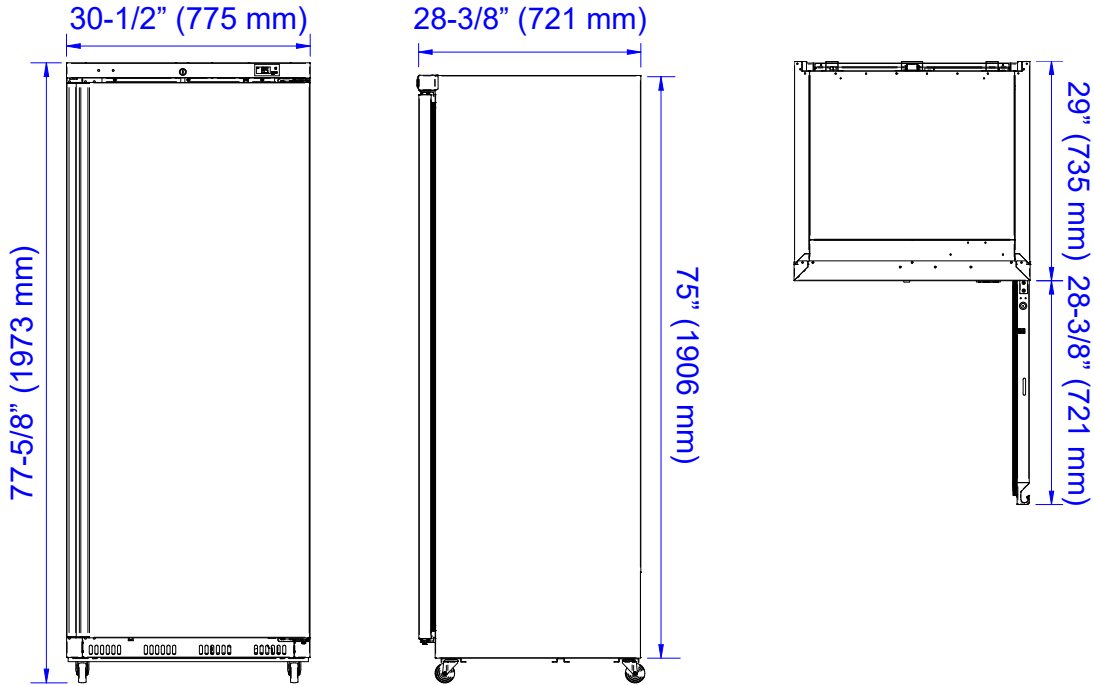

MODEL	AWRR-23	AWRF-23
ELECTRICAL DATA		
Volts - Frequency	115V. - 60 Hz.	
Power (HP)	1/4	1/2
Full Amp Load	2.5	5.0
Plug Type	NEMA 5-15P	
Chord Length (ft)	94-1/2	
Refrigerant	R290	
INTERIOR DIMENSIONS (in)		
Width	25-7/8	
Depth	21-3/4	
Height	55-3/8	
Shelf (in)	25-5/8 x 20-1/2 & 25-5/8 x 11-3/8	
SHIPPING DIMENSIONS (in)		
Width	35	
Depth	33-1/4	
Height	81-1/4	



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.