



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

SELF-CONTAINED ICE MACHINES

MODEL: 69K-906 69K-907



Kratos Ice self-contained, air-cooled ice machines are perfect for any freestanding or built-in application. Available in both full or half dice cubes, each unit features a sanitary self-contained storage bin. The durable stainless steel and black trim exterior is easy to clean and service. The digital controls and front-breathing design with vertical evaporator will deliver years of reliable ice production.

FEATURES AND CONSTRUCTION

- Stainless steel, black trim exterior
- Air-cooled compressor
- Programmable, user-friendly digital controls
- Digital screen displays ice machine status
- Automatic cleaning cycle and bin overflow prevention
- Internal blue LED light
- 6" adjustable leveling legs
- Includes ice scoop with internal scoop holder
- Energy Star approved
- Antimicrobial agent within polyethylene storage bin liner for improved sanitation

DAILY ICE PRODUCTION

Air Temp 70°F (21°C) / Water Temp 50°F (10°C)
69K-906/907..... 152 lbs (69 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)
69K-906/907..... 130 lbs (59 kg)

ICE BIN STORAGE CAPACITY


69K-906/907..... 75 lbs (34 kg)

OPERATING REQUIREMENTS

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C)
 Water Temperature Range..... 41° to 90°F (5° to 32°C)
 Water Usage per 100 lbs of ice..... 13.3 Gallons (50L)
 Water Supply Line Connection 3/8" FPT
 Water Pressure Range:
 Min PSI..... 15 Max PSI 80*
 Min Bar 1.0 Max Bar 5.5
 *Above 80 PSI requires a regulator
 Energy Consumption per 100 lbs of ice:
 69K-906/907..... 6.64 kWh/100 lbs

ELECTRIC

115V / 60Hz / 1Ph
International voltage available
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Certified to ANSI NSF 12



Certified to ANSI UL 563



DOE 2018 Compliant



Zero Ozone Depletion Potential




Meets Energy Star Guidelines


KRATOS ICE WARRANTY (USA)

One (1) year parts and on-site labor


Contact Central Restaurant Products for warranty statement at
www.centralrestaurant.com or 888.908.8051

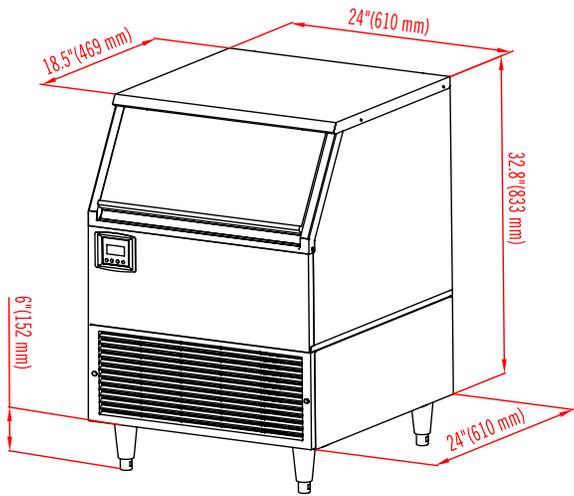


REAR VIEW

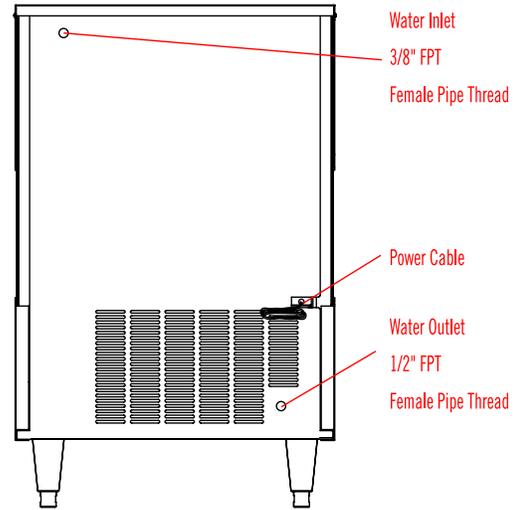


SIDE VIEW

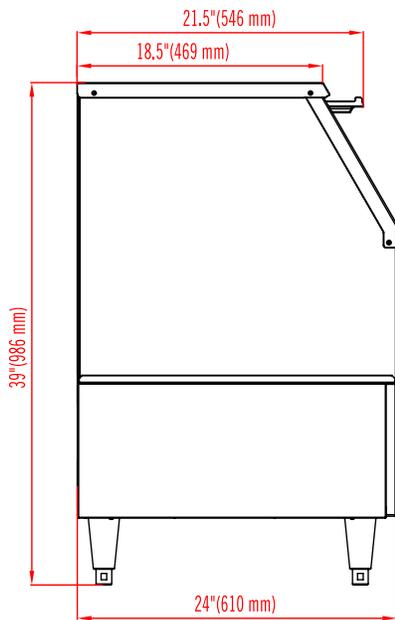

FULL DICE CUBE (69K-906)

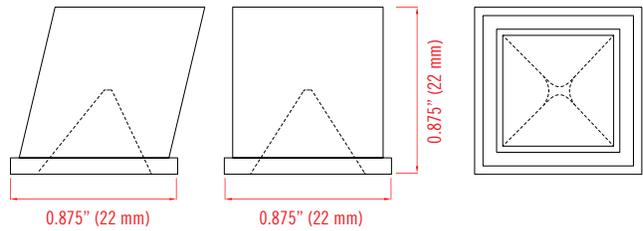

HALF DICE CUBE (69K-907)

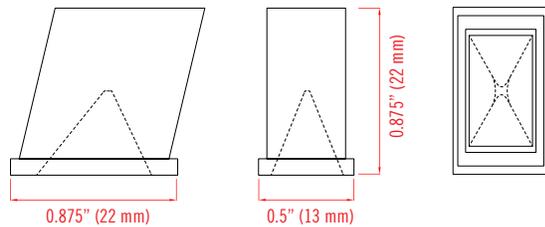

MODEL	EXTERNAL DIMENSIONS	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE CAPACITY	NET WEIGHT / SHIPPING WEIGHT	AMP DRAW (MAKING / HARVESTING)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
69K-906/907	24" x 24" x 39" (610 x 610 x 986 mm)	152 lbs (69 kg)	75 lbs (34kg)	139 lbs (63 kg) 155 lbs (70.5 kg)	5.2A / 6.4A	R-134a 7oz (198g)	115V / 60Hz / 1Ph

INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended