



GAS

PRO SERIES | HIGH EFFICIENCY COUNTERTOP GRIDDLE

IMPERIAL

IHEG-72



HIGH EFFICIENCY GRIDDLE

- Infrared burners every 12"
- Individually controlled temperature zones
- Temperature alarm alerts if temperature is +/- 25 degrees
- Individual controllers can be turned off
- Multiple imbedded probe sensing on griddle plate
- Digital griddle plate temperature display
- Renau controller
- Embossed back guard
- Extra capacity grease drawer
- Unit on/off switch
- Single gas connection on bottom of unit
- Stainless steel legs
- Debris diverting flue design
- 1 year warranty on all parts and labor

MODEL NUMBERS

IHEG-24	IHEG-24S
IHEG-36	IHEG-36S
IHEG-48	IHEG-48S
IHEG-60	IHEG-60S
IHEG-72	IHEG-72S

GREASE MAINTENANCE:

- 4" wide stainless steel grease gutter with fully welded grease chute
- A full 1.5 gallon capacity grease drawer removes easily

IMPERIAL


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2025 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



GAS

PRO SERIES | HIGH EFFICIENCY COUNTERTOP GRIDDLE

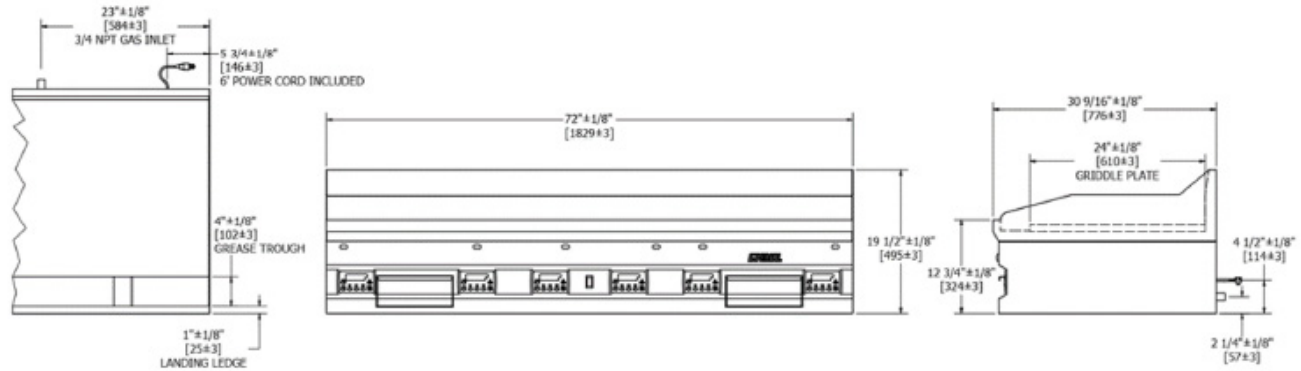

HIGH EFFICIENCY COUNTERTOP GRIDDLE

MODEL	PLATE DIMENSIONS	GAS OUTPUT BTU	GAS OUTPUT KW	BURNERS	SHIP WEIGHT KG	SHIP WEIGHT LBS	DIMENSIONS	CRATED DIMENSIONS
IHEG-24	24" W X 24" D	60,000	18	2	180	397	24" W X 32-9/16" D X 23-1/2" H 610 MM X 827MM X 597MM	28-1/2" W X 36" D X 26" H 724 MM X 915MM X 660MM
IHEG-36	36" W X 24" D	90,000	26	3	230	506	36" W X 32-9/16" D X 23-1/2" H 915 MM X 827MM X 597MM	38-1/2" W X 36" D X 26" H 978 MM X 915MM X 660MM
IHEG-48	48" W X 24" D	120,000	35	4	305	673	48" W X 32-9/16" D X 23-1/2" H 1220 MM X 827MM X 597MM	50-1/2" W X 36" D X 26" H 1283 MM X 915MM X 660MM
IHEG-60	60" W X 24" D	150,000	44	5	383	845	60" W X 32-9/16" D X 23-1/2" H 1524 MM X 827MM X 597MM	62-1/2" W X 36" D X 26" H 1588 MM X 915MM X 660MM
IHEG-72	72" W X 24" D	180,000	53	6	462	1018	72" W X 32-9/16" D X 23-1/2" H 1829 MM X 827MM X 597MM	74-1/2" W X 36" D X 26" H 1892 MM X 915MM X 660MM

HIGH EFFICIENCY COUNTERTOP GRIDDLE STAND

MODEL	DESCRIPTION	SHIP WEIGHT KG	SHIP WEIGHT LBS	DIMENSIONS	CRATED DIMENSIONS
IHEG-24S	Equipment Stand, 24"W, stainless steel, for IHEG24	12	26	20 3/4" W X 26 1/2" D X 24 1/2" H 527MM X 673MM X 622MM	21 3/4" W X 29 1/2" D X 5 3/4" H 553MM X 749MM X 146MM
IHEG-36S	Equipment Stand, 36"W, stainless steel, for IHEG36	17	38	32 3/4" W X 26 1/2" D X 24 1/2" H 832MM X 673MM X 622MM	33 3/4" W X 29 1/2" D X 5 3/4" H 838MM X 749MM X 146MM
IHEG-48S	Equipment Stand, 48"W, stainless steel, for IHEG48	23	51	44 3/4" W X 26 1/2" D X 24 1/2" H 1137MM X 673MM X 622MM	45 3/4" W X 29 1/2" D X 5 3/4" H 1143MM X 749MM X 146MM
IHEG-60S	Equipment Stand, 60"W, stainless steel, for IHEG60	29	64	56 3/4" W X 26 1/2" D X 24 1/2" H 1422MM X 673MM X 622MM	57 3/4" W X 29 1/2" D X 5 3/4" H 1448MM X 749MM X 146MM
IHEG-72S	Equipment Stand, 72"W, stainless steel, for IHEG72	35	78	68 3/4" W X 26 1/2" D X 24 1/2" H 1727MM X 673MM X 622MM	69 3/4" W X 29 1/2" D X 5 3/4" H 1753MM X 749MM X 146MM

MANIFOLD PRESSURE

NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

AMPERAGE REQUIREMENTS

VOLTAGE	PHASE	HZ	AMPS MAX
120	1	60/50	2

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

MADE IN USA

IMPERIAL

1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2025 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates