



Project Name: _____

Item #: _____

Model #: _____

CMS INSTALLATION GUIDE

For Design and Installation Assistance
Call: 800-221-5644
info@imcteddy.com

50 Ranick Drive East • Amityville, NY 11701
(P) 800-221-5644 • (F) 631-789-8881

www.imcteddy.com


INTRODUCTION

Installing the IMC Teddy Hand Sink is a straightforward procedure that can be accomplished with normal construction materials and techniques. Installation procedures may vary due to field conditions and state regulations. Please note that the following instructions are recommendations only. The installer is responsible for proper setting and making sure the appropriate codes are followed. Please contact the IMC Teddy Engineering Department (800-221-5644) prior to considering retrofit installations.

Please read the attached information carefully, as much of the information provided is reflecting proven installation techniques used in previous installations.


Parts Included

- CMS Sink Unit
- “Z-Clip” Mounting Bracket
- Pot Filler Faucet (not shown)
- Sink Faucet (not shown)
- Grating

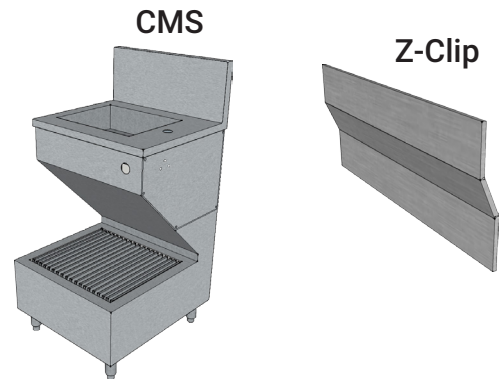


Step 1:

Position Z-bracket onto wall matching the height of the CMS unit and mark holes for drilling. (Make sure bracket is level.) Once holes are drilled screw bracket to wall. (Hardware not included.)

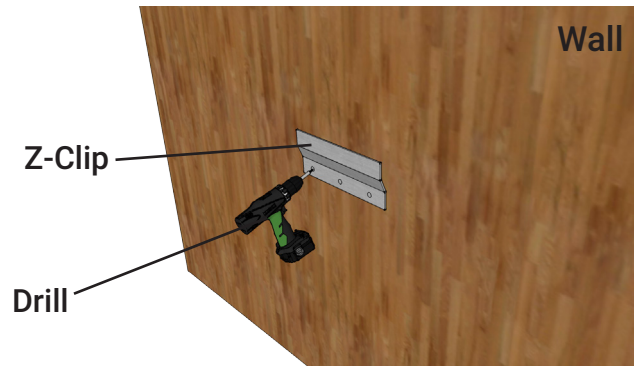


Step 2:

Position CMS unit onto Z-bracket over indirect drain on the floor.

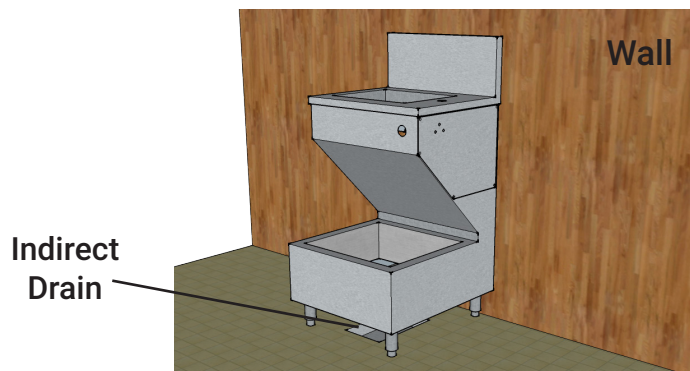

Step 3:

Set grating on the flange of the mop sink. The grating should fit properly inside the mop sink.

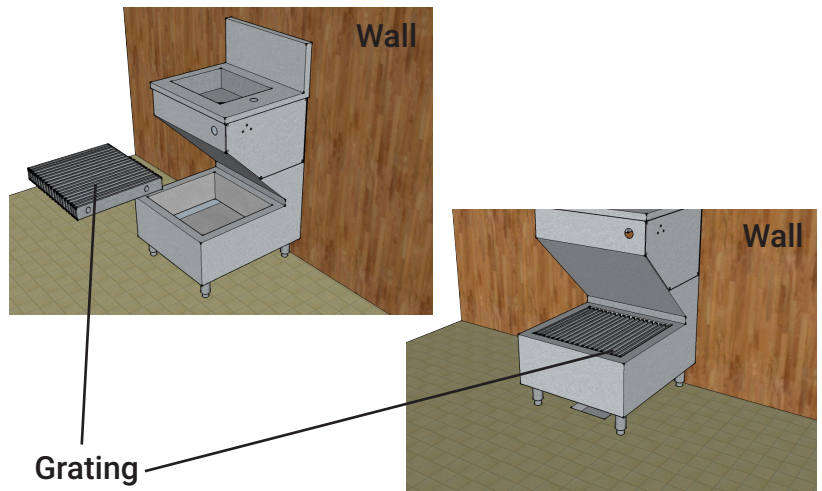

Step 5:

Make all necessary plumbing connections to faucets and waste drain. The CMS unit features a removable side panel and open back for access to plumbing.

Note: 1½" Chrome Cup Drain
½" NPT Hot & Cold

