

Project Name: _____

Consultant: _____

Item #: _____

Model #: _____

Quantity: _____



Specifications

RGLH-S Model Splash Mounted Gooseneck Faucet is constructed from a high polished triple dipped chrome finish.

Unit features a 5" gooseneck spout, 4" O.C. splash mount, 1/4 turn ceramic cartridges and integral check valves.

Unit features a double O-ring spout seal and color coded hot & cold indicators.

Unit features an aerated stream aerator with a flow rate of 2.0 gpm.

RGLH-S is a certified plumbing fixture & meets lead free compliance.

Product Guide

Install a convenient and useful water fixture in your business.

The gooseneck swing spout provides excellent reach and clearance for ease of use. It will easily move from side to side to provide room above your sink.



Easily installed on any IMC hand sink backsplash, simply hook it up to your plumbing and it is ready to use.

Options

- ☐ Vandal Resistant Aerator - .5 GPM or as required



RGLH-S -40 0221

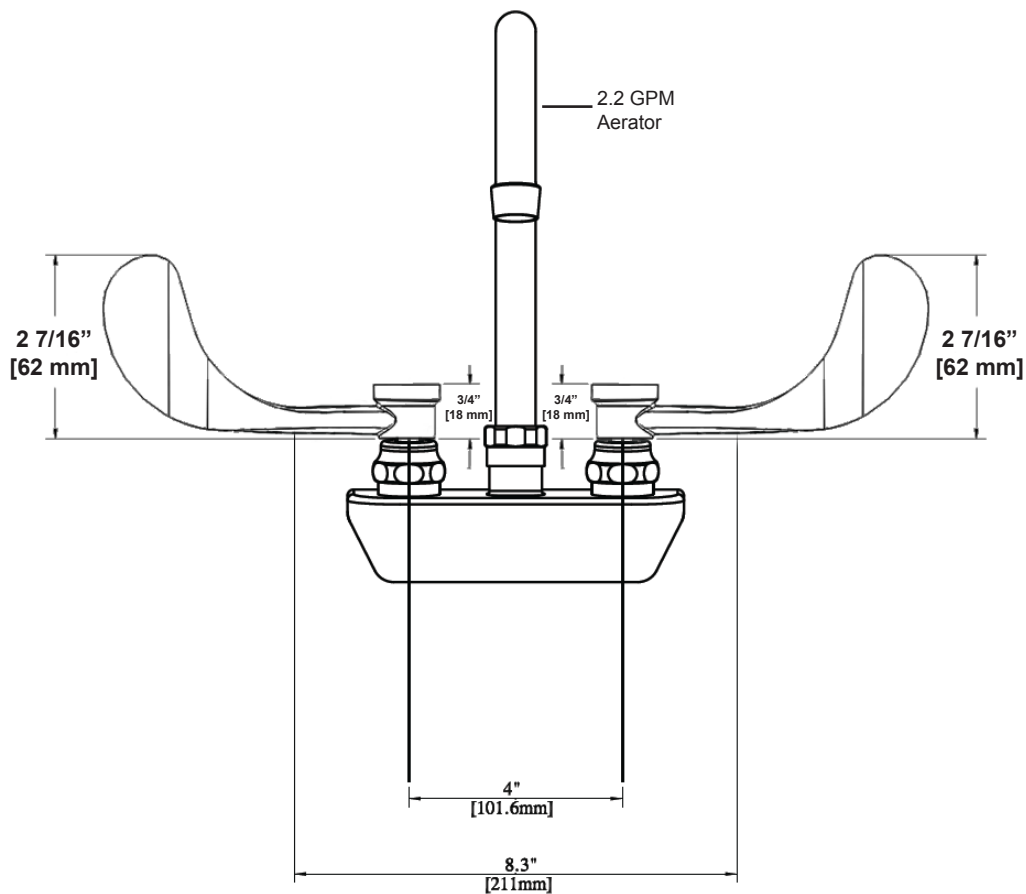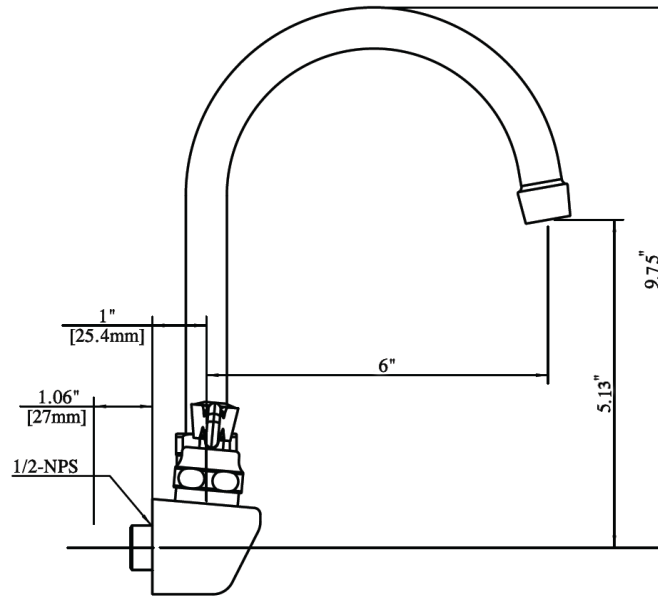

Specifications subject to change without notice.

RGLH-S -40 0221