



Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



## GTi Scale



GT Scale with 11.6" Operator Display



GT Scale with 10" Elevated Customer Display



## SPECIFIER STATEMENT

The GTi scale is equipped with a quad-core processor and Linux operating system. GT scales weigh, automatically compute a price from stored PLU's, and print a label. The GT scales utilize Hobart's multi-screen swipe technology user interface for operator ease of use. Scales on the same network may connect remotely to other scales for a Hand Wrap Station or other applications.

## MODELS

| Model                              | Customer Display  | Operator Display |
|------------------------------------|-------------------|------------------|
| <input type="checkbox"/> GTi-DB    | No GCD            | 11.6"            |
| <input type="checkbox"/> GTiP-DB   | Printer Only      | 11.6"            |
| <input type="checkbox"/> GTi-7DB   | 7" Integrated GCD | 11.6"            |
| <input type="checkbox"/> GTi-7EDB  | 7" Elevated GCD   | 11.6"            |
| <input type="checkbox"/> GTi-10EDB | 10" Elevated GCD  | 11.6"            |
| <input type="checkbox"/> GTi-DC    | No GCD            | 13.3"            |
| <input type="checkbox"/> GTiP-DC   | Printer Only      | 13.3"            |
| <input type="checkbox"/> GTi-7DC   | 7" Integrated GCD | 13.3"            |
| <input type="checkbox"/> GTi-7EDC  | 7" Elevated GCD   | 13.3"            |
| <input type="checkbox"/> GTi-10EDC | 10" Elevated GCD  | 13.3"            |

## STANDARD FEATURES

- + Engaging and customizable graphical user interface
- + Capacitive touch display for optimal responsiveness
- + Durable touchscreen improves wear and tear properties
- + Optional operator display sizes (11.6", 13.3")
- + Change departments from the home screen
- + Auto-print capability from home screen
- + Customizable flash keys
- + Built-in wired or wireless connectivity
- + 5-screen swipe capability
- + Up to 3" label width
- + Low label detection and alerts
- + Advanced diagnostic alerts
- + Search by description, category, or PLU
- + Best seller keys by scale/department
- + On-screen operator manual and tutorial videos
- + Cassette label loading system for fast and efficient label changes
- + Hot swap print head and print roller for increased uptime
- + Support for UPC, EAN 13 & 128 barcodes, QR Codes, Datamatrix, and GS1 Databar
- + Track operator and supervisor changes
- + Remote access with Hobart software

## SOFTWARE

- + Linux embedded operating system 
- + Interfaces with scale management software such as:
  - Invafresh
  - Upshop
  - Hobart HCT
  - Hobart HTe Enterprise
    - Content management
    - Label editing
    - Remote updates

GT SCALE SERIES – GTi




Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



## TECHNICAL SPECIFICATIONS

- + 11.6" or 13.3" Capacitive Touchscreen
- + 7" integrated customer display
- + Optional 7" or 10" elevated customer display
- + Quad-core processor
- + 2 GB DDR3 RAM Memory
- + 32 GB micro SD RAM standard
- + 8 ips print speed
- + WiFi-6, and WPA3 security encryption
- + Two external USB 3.0 ports
- + High resolution thermal printhead for detailed graphics (store logos) and smaller barcodes - 203 dpi (8 dots per mm)
- + Accepted labels:
  - 1.50" to 3.00" width
  - 1.00" to 9.50" long die cut
  - Continuous labels
  - Oval labels
  - Linerless (optional)

## DETAILS AND DIMENSIONS

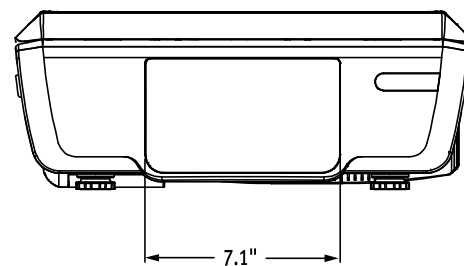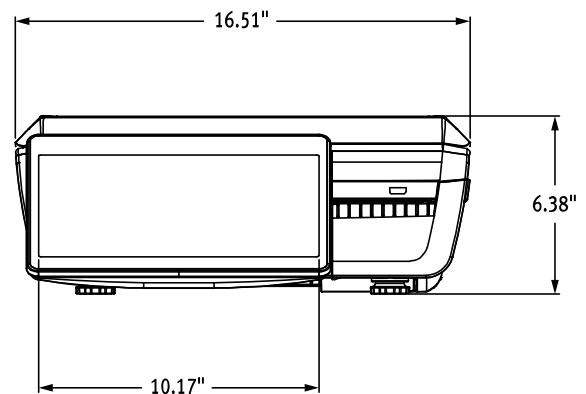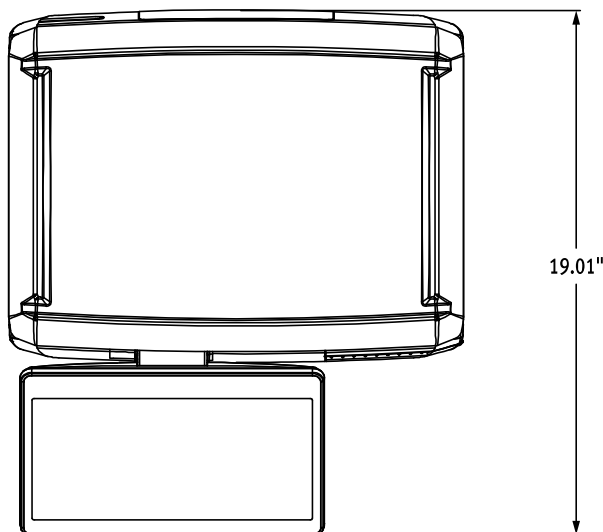

GT 11.6" Operator Display, 7" Integrated Customer Display

## SPECIFICATIONS

**Platter:** 16.5" wide x 12" deep

**Weigher Capacity:**

0 lb. - 12 lb. x 0.005 (0-6 kg x .002 kg)

12 lb. - 30 lb. x 0.01 (0-15 kg x .005 kg)

**Pricing Capacity:** Up to 999.99 in steps of .01

**Electrical:** 100-240 volts, 50-60 Hz, single phase, 1.42 amps, 170 watts max. 9 foot standard cord cap with ground type plug furnished.

**Media Supports:** MPEG4, AAC, AVC/H.264

**Weights and Measures Certification:**

+ USA Certification – 23-095

+ Canada Certification – Pending

**Environment:** Operating temperature limits are 14°F (-10°C) to 104°F (40°C) ambient. Scale operates satisfactorily in relative humidity of 10 to 85%.


**Shipping Weight:** 34 lbs.

## ACCESSORIES


- PLATTER-FISH-GT – Fish pan replaces standard scale platter in seafood departments







## DETAILS AND DIMENSIONS

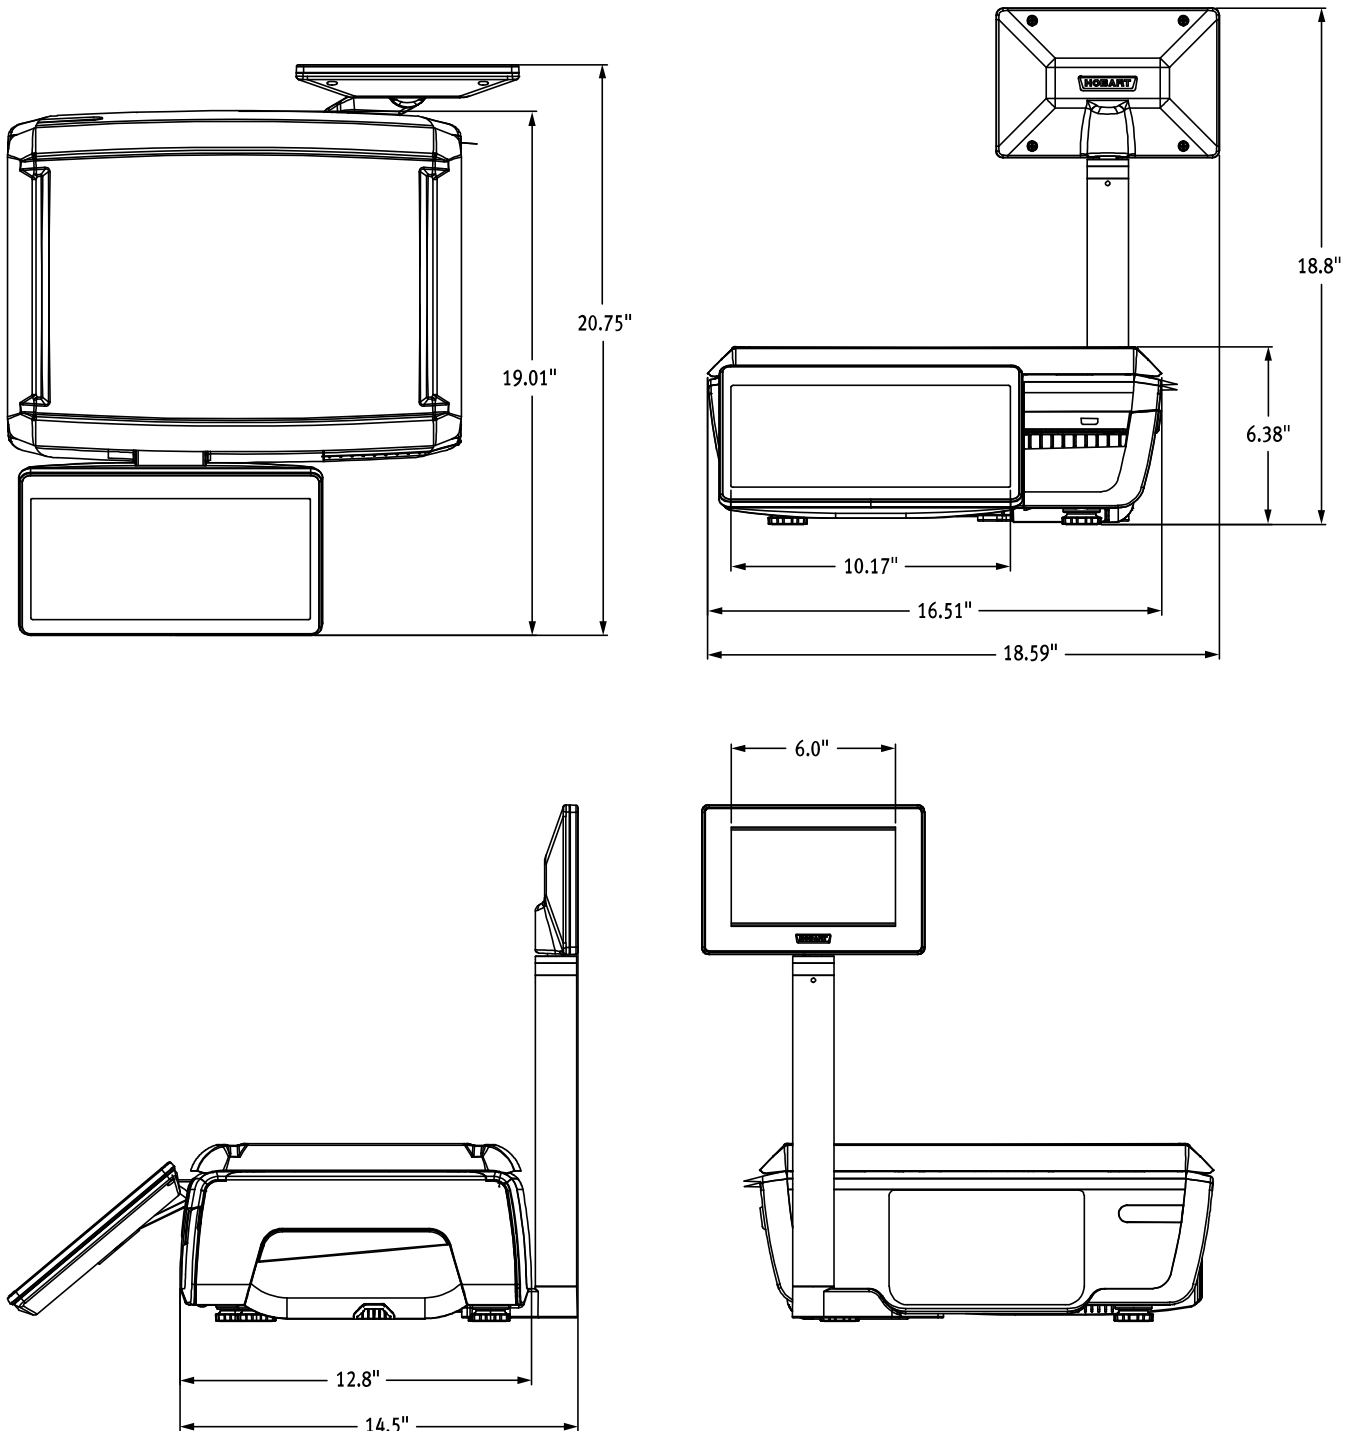

GT 11.6" Operator Display, 7" Elevated Customer Display

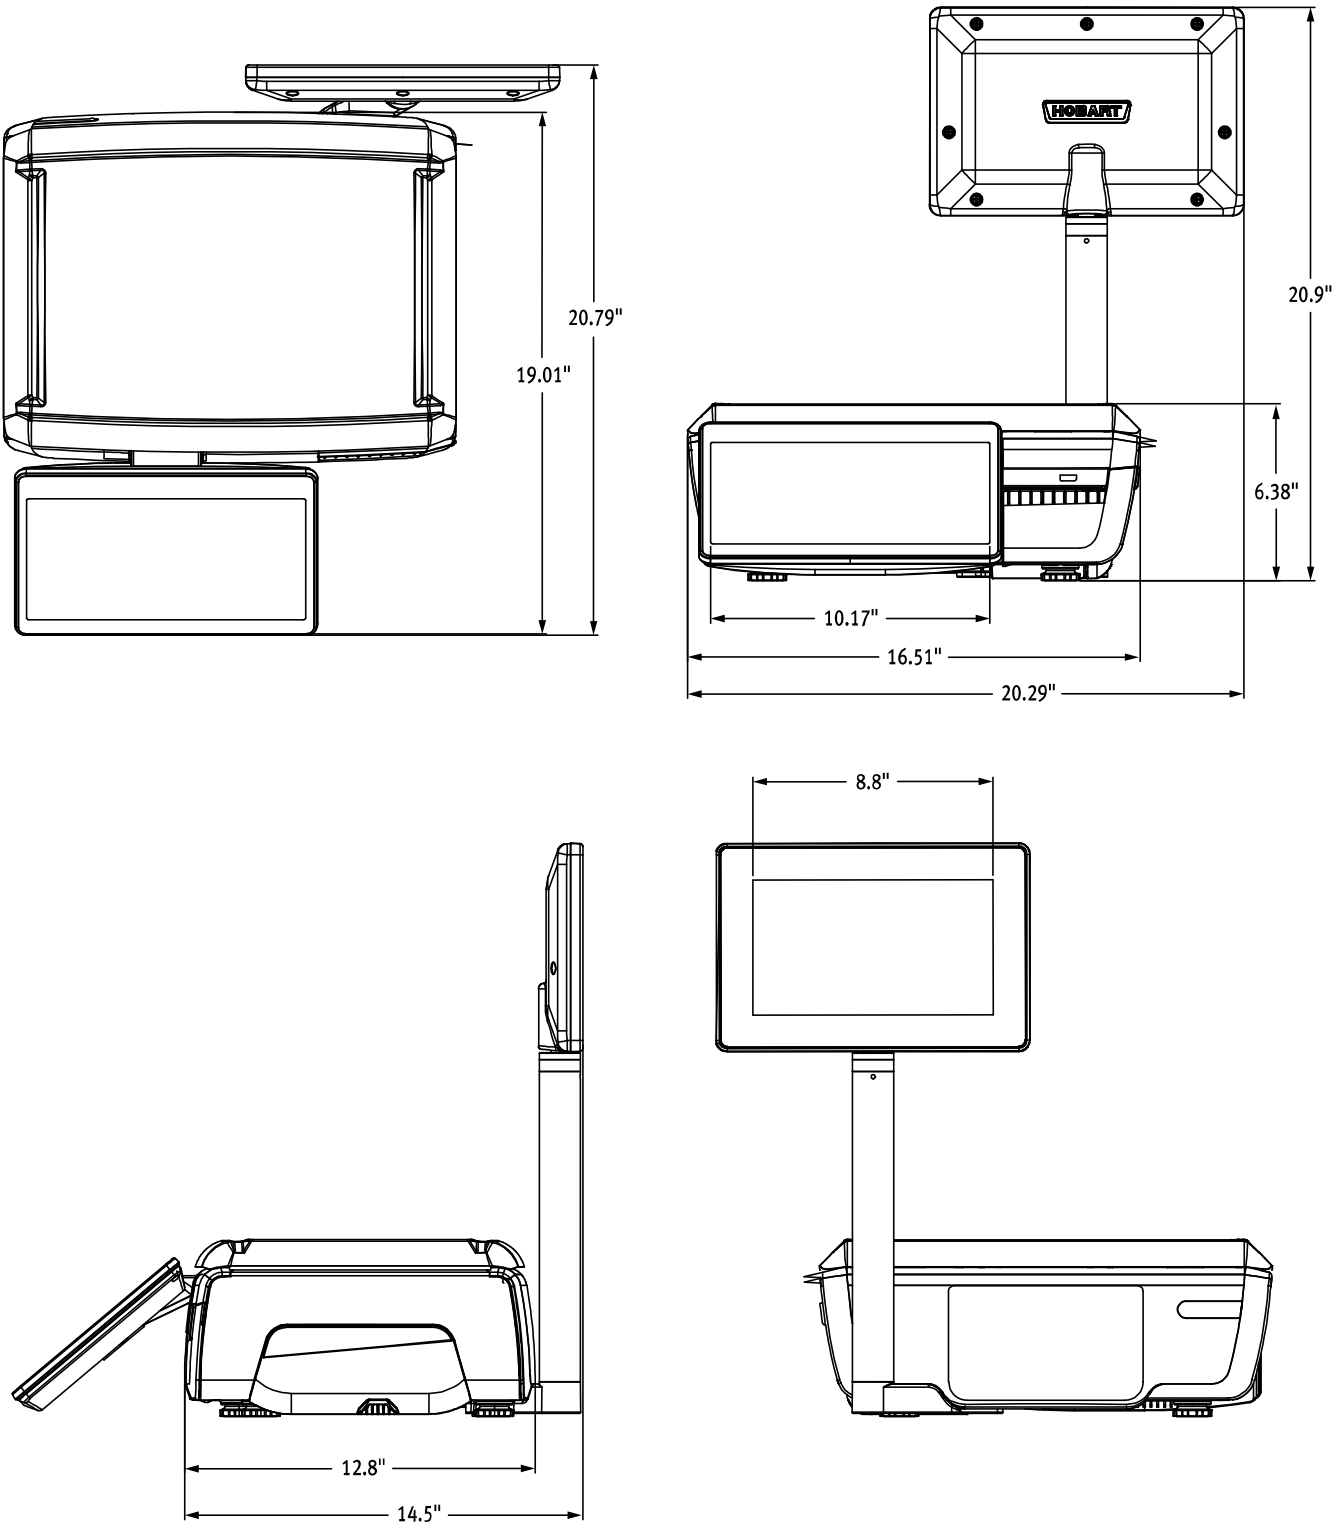


GT 11.6" Operator Display, 10" Elevated Customer Display

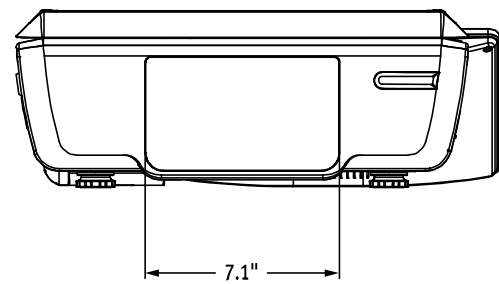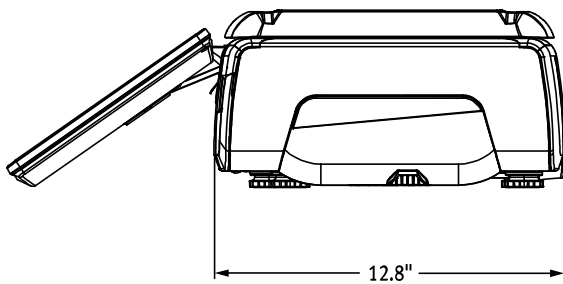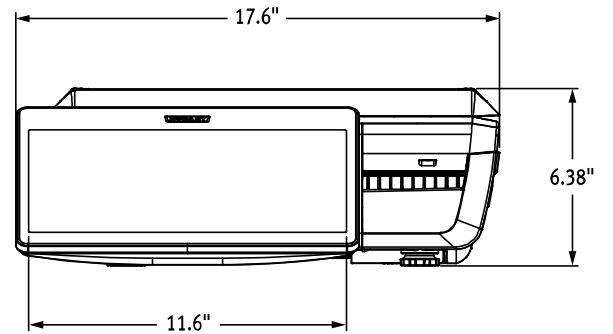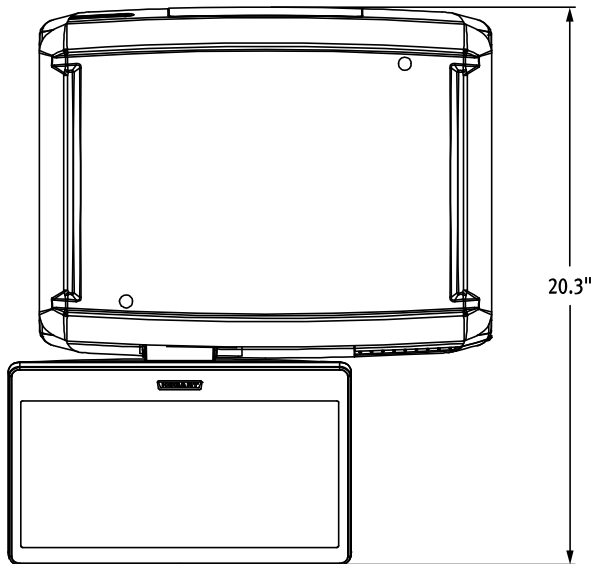

GT 13.3" Operator Display, 7" Integrated Customer Display




GTi  
Scale

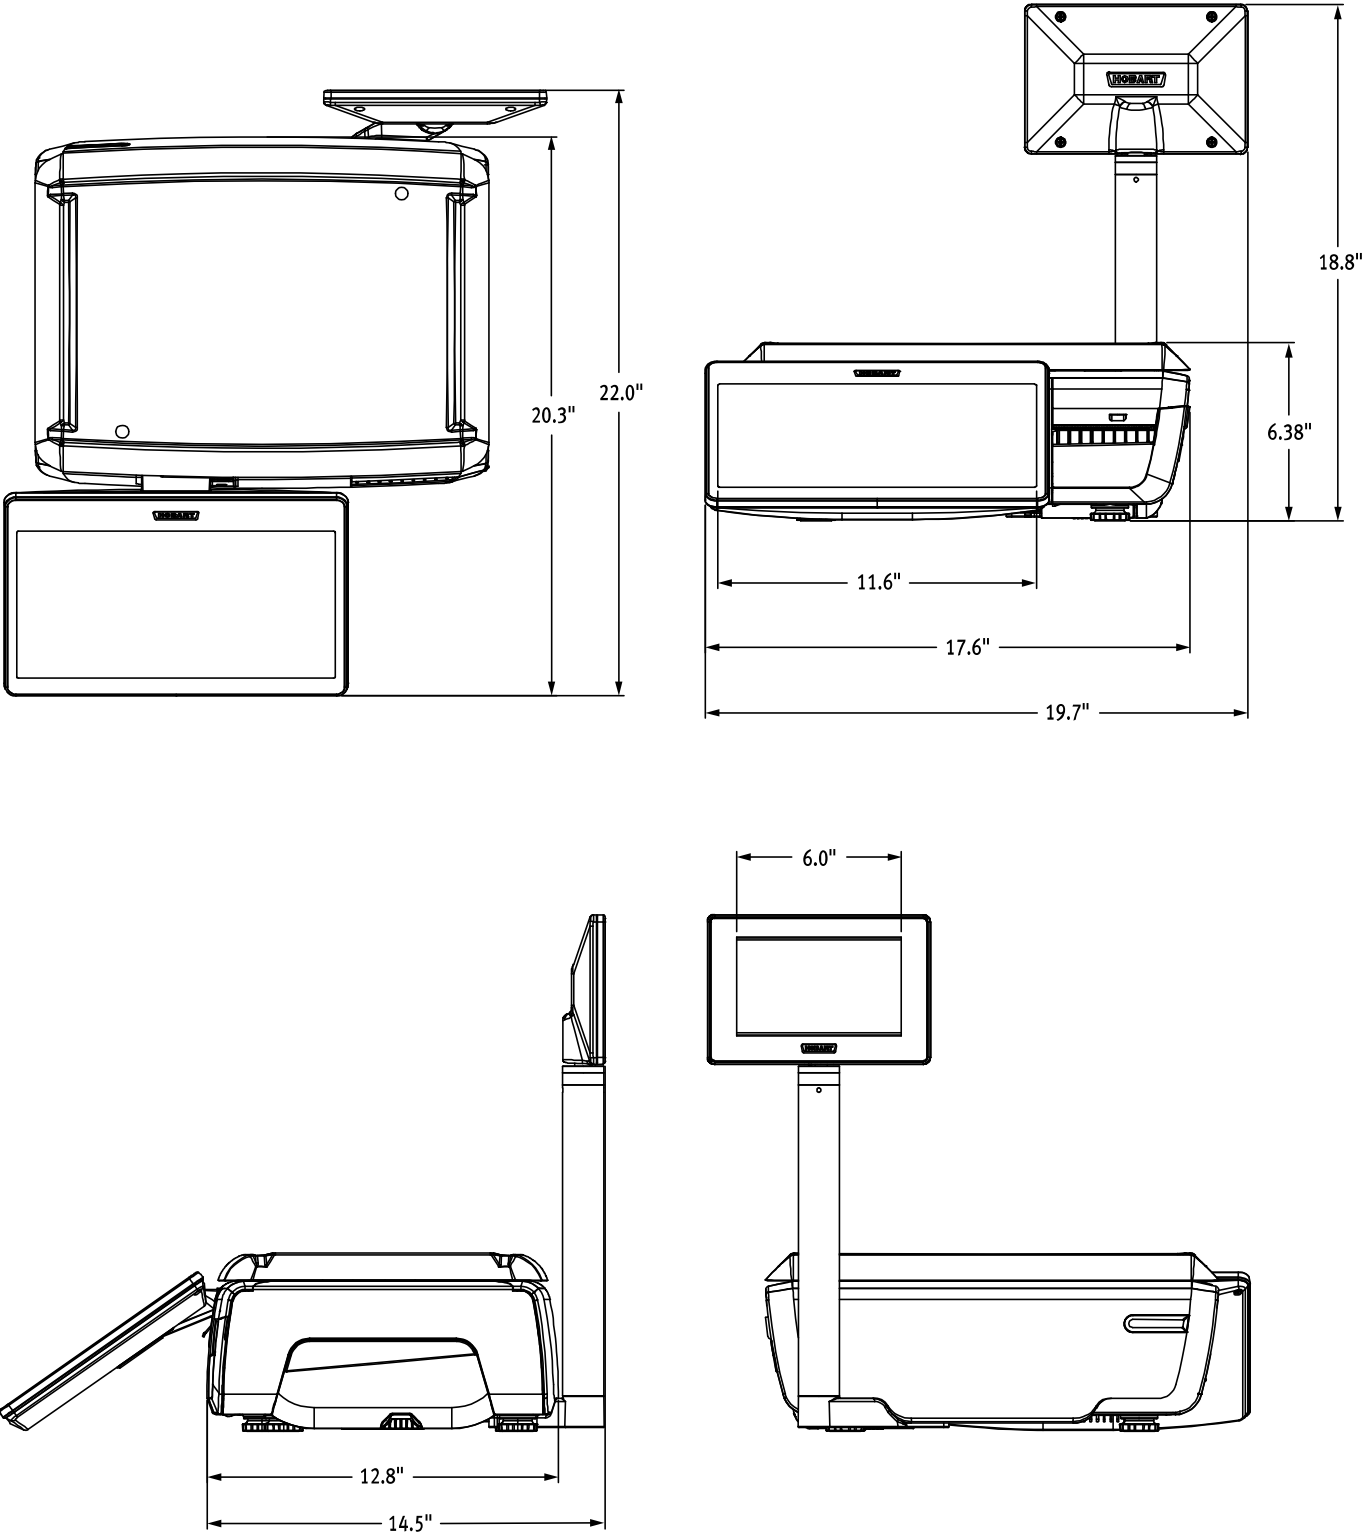

GT 13.3" Operator Display, 7" Elevated Customer Display



GTi  
Scale

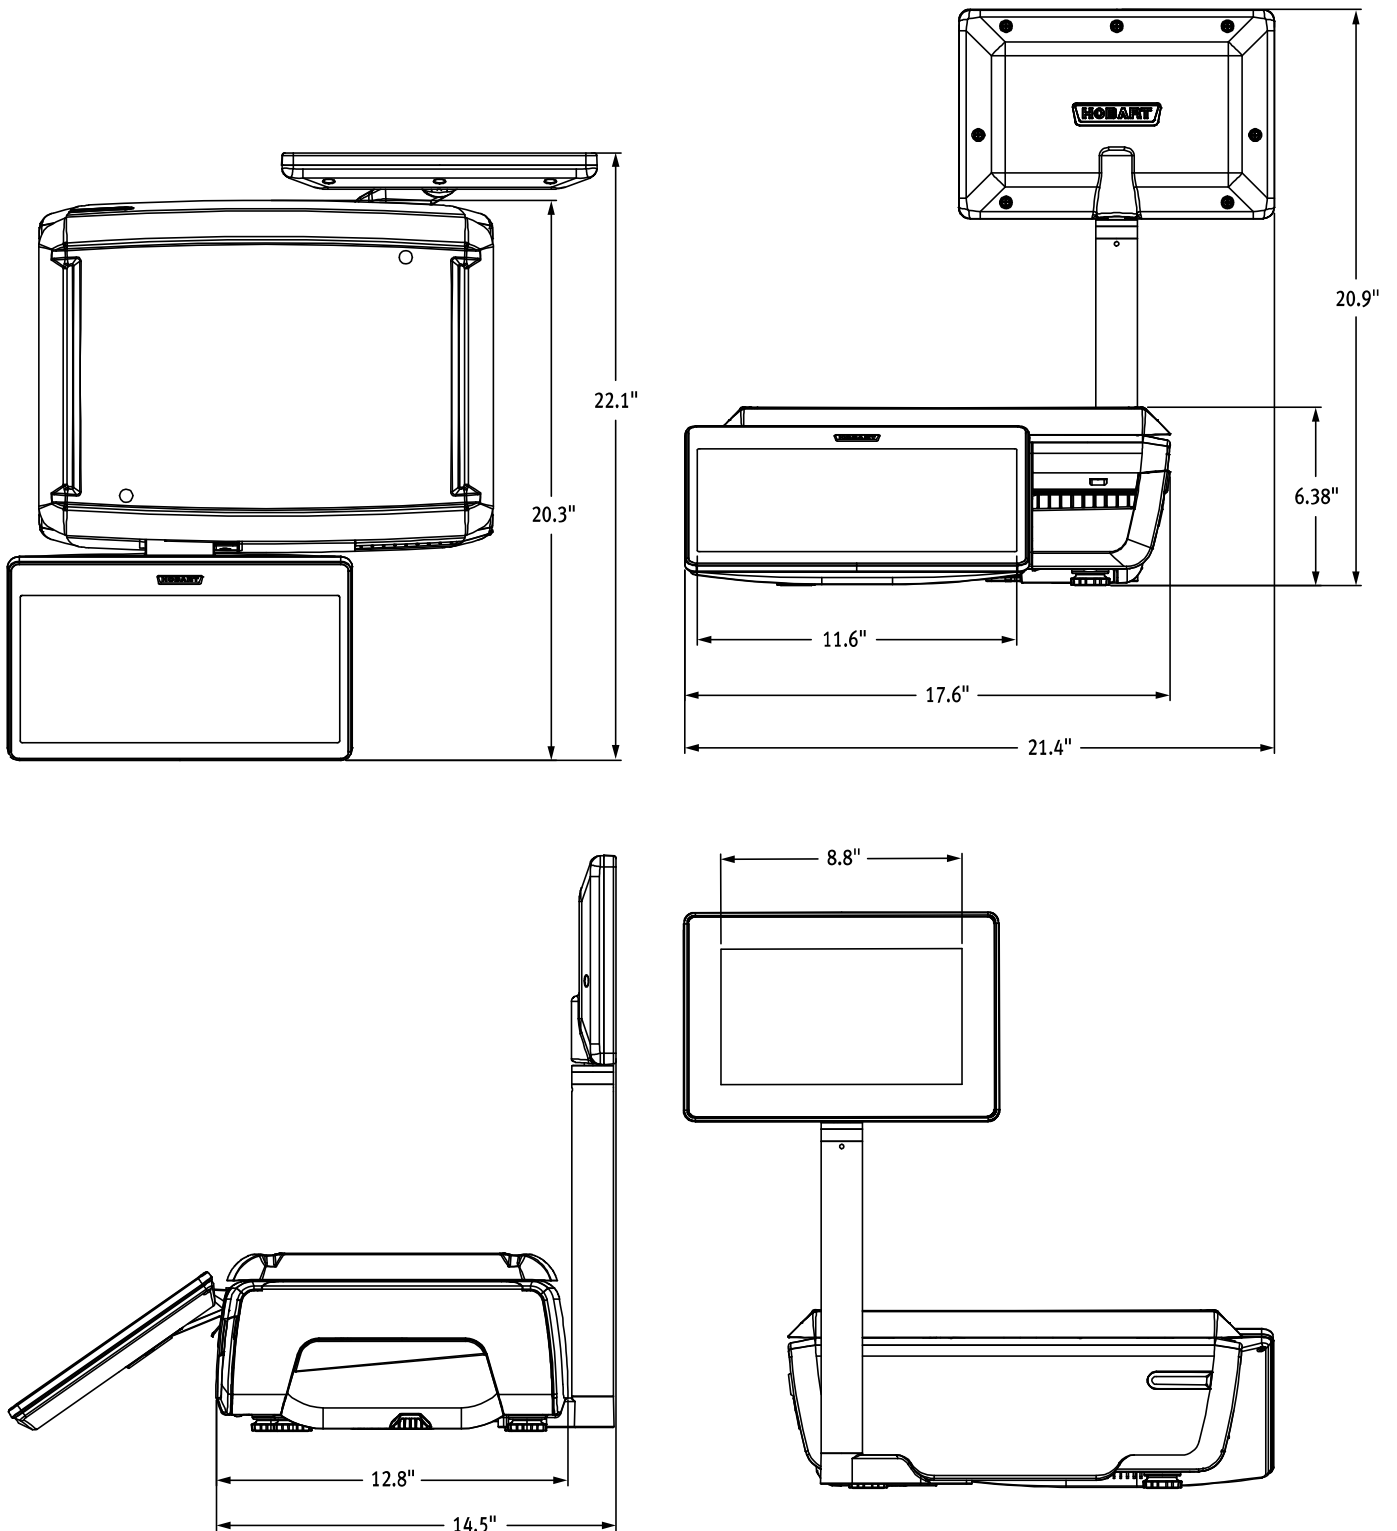

**GT 13.3" Operator Display, 10" Elevated Customer Display**

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.