

6040

HORIZONTAL SHOWCASES



CIAM

Refrigeration solutions
with a design focus.



6040

A new concept of
technological essentiality



Pasticceria Varriale - Naples

The 6040 showcases series consists of refrigerated, heated or ambient modular showcases available in 4 depths (625, 800, 1000, 110) and 16 types of glass gantries. The 6040 showcase is characterized by a small difference in height between the work surface and the display area, which is always coplanar even in the case of display cases joined together. The minimalist style of 6040 allows designers to easily insert this type of showcase in any design and stylistic context.



Watch video


Versatility and technology serving any business need

Dupont avec un thé - Neuilly-sur-Seine





Petrossian - Issy-les-Moulineaux

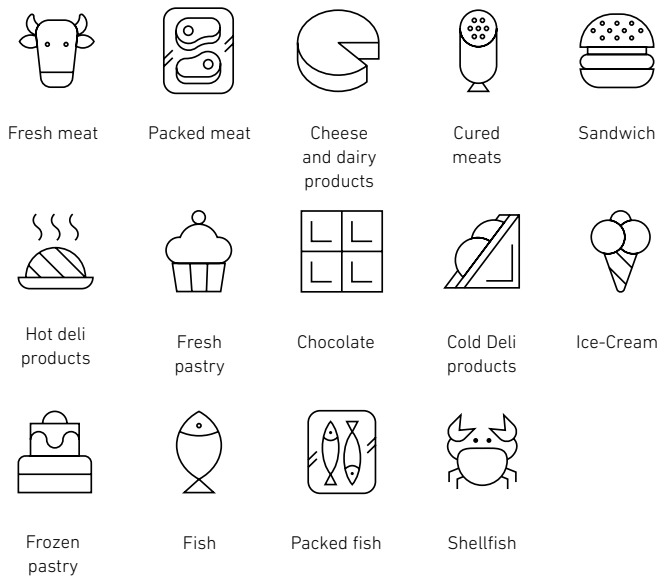

The 6040 models can satisfy any business need. They are perfect for preserving and displaying: fresh pastry, monoportions, macarons, chocolate, ice-cream, ice-cream cakes, butchery products, cold and hot deli products, brioches, pizza, bread, fish.



Sleek and modern design for superb refrigeration solutions



Pasticceria Cova - Atene





Panadolci - Manduria

Wide selection of materials

Design

Materials

All visible components can be customized by using Ciam's selection of Materials, which includes a wide variety of gres, acrylics, engineered stones, natural stones, epoxy powder-coated sheets, sheets with electroplating treatment, brass, and wood.

Micro-perforated sheet

The air supply and intake are characterized by an elegant micro-perforated geometry.

Digital display

The temperature display is digital, flush with the top.





Micro-perforated sheet



Digital display



Customization

Wide range

The 6040 display case range has 12 lengths (from 900 to 3000 mm), 2 types of 90° open corners (squared and curved) and 1 45° (curved), 4 depths (625, 800, 1000, 1100 mm).

Channeling

6040 display cases can be perfectly channeled in aesthetic continuity regardless of the type of system (ice cream, pastry, deli, etc...).



Joint kit on Combi showcases



Examples of channeling in aesthetic continuity



P1100mm
(meat/deli only)



P1000mm



P800mm



P625mm

Depth of refrigerated display cases



P1000mm
double air-flow



P1000mm
single air-flow



P1000mm
lowered side arrangement



P800mm



P625mm

Depth of ice-cream display cases



Meat
+2/+4°C

Deli
+2/+4°C

Fish
+2/+8°C

Types of set-up

6040 showcases can be supplied in the following set-ups:

Paneled

A solid or painted HPL paneling is supplied upon request along with the display case.

Semi-finished set-up

The display case is without paneling, this one will be provided by the interior designers.

Drop-In

the showcases is supplied in drop-in version, in order to be embedded in an existing counter.

Paneled set-up





Drop-in set-up



Semi-finished set-up

Glass gantries

The wide range of 6040 display cases is completed with the possibility of combining as many as 16 types of glass gantries available in multiple heights.




Matching hardware

The profiles and hardware are designed with a unique, minimalist style, most are made of steel with micro-cast molds, the standard finish is polished, but epoxy powder coating or galvanic treatment is available upon request.

Adjustable shelves

Intermediate glass shelves, where provided, have integrated micro-lighting fixture. The system of adjustment in both height and depth is done by means of low-voltage electrified racks, which avoid the use of electric cables.

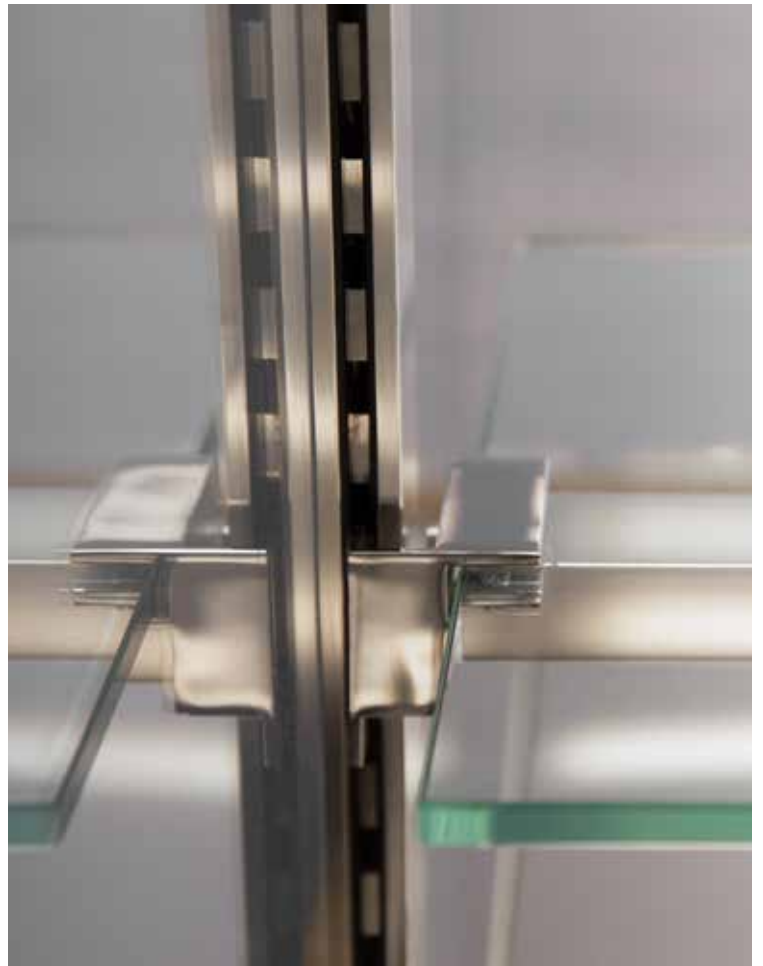

Adjustable shelves on low-voltage electrified rack





TS

h1200 mm

UV glued glass, heated glass sides, bright aluminum LED light fixture. PETG easy sliding doors system, anti-fog front air baffle.

h1350 mm

UV glued glass, heated glass sides, bright aluminum LED light fixture and adjustable intermediate glass shelf on low-voltage bright aluminum electrified rack. PETG easy sliding doors system, anti-fog air baffle.



Detail of the UV glued glass gantry, shelf support column with standard shelf and additional shelf

R4

h1200 mm

Glass structure with mechanical fastening, heated glass sides, bright aluminum LED light fixture. PETG easy sliding doors system | anti-fog air baffle.

h1350 mm

Glass structure with mechanical fastening, heated glass sides, bright aluminum LED light fixture, adjustable intermediate glass shelf on low-voltage bright aluminum electrified rack. PETG easy sliding doors system, anti-fog air baffle.



Glass gantry with mechanical clamping





R4UP

h1200 mm

Upper glass structure screwed front glass on aluminum blocks, heated glass sides, the top glass can be lifted up; upper glass structure, thickness 10mm. LED lighting canopy in brilliant aluminum, plexiglas sliding doors.

h1350 mm

Upper glass structure screwed front glass on aluminum blocks, heated glass sides, the top glass can be lifted up; upper glass structure, thickness 10mm. LED lighting canopy in brilliant aluminum, adjustable intermediate glass shelf on low-voltage bright aluminum electrified rack, plexiglas sliding doors.



The top glass can be lifted up

C4

h1200 mm

Front glass hinged on bright aluminum profiles with downward opening, NoFog heated glass sides, glass top, bright aluminum LED light fixture. PETG easy sliding doors system, anti-fog air baffle.

h1350 mm

Front glass hinged on bright aluminum profile with downward opening, NoFog heated glass sides, adjustable intermediate glass shelf with LED lighting on low-voltage bright aluminum electrified rack, glass top, bright aluminum micro LED light fixture. PETG easy sliding doors system, anti-fog air baffle.



Front glass with downward opening



S2



h1200 mm

Front glass hinged on silver aluminum profiles with downward opening. Heated glass sides, bright aluminum side profiles, intermediate glass shelf, LED light fixture on each tier, glass top, PETG easy sliding doors system, anti-fog air baffle.

h1350 mm

Front glass hinged on brilliant aluminum profile with downward opening. Heated glass sides, side profiles in brilliant aluminum, n.2 intermediate glass shelves, bright aluminum LED light fixture on each tier, glass top, PETG easy sliding doors system, anti-fog air baffle.

h1500 mm

Front glass hinged on brilliant aluminum profile with downward opening. Heated glass sides, side profiles in brilliant aluminum, n.3 intermediate glass shelves, bright aluminum LED light fixture on each tier, glass top, PETG easy sliding doors system, anti-fog air baffle.



Front glass hinged on silver aluminum profiles.



Intermediate glass shelves, bright aluminum LED light fixture on each tier


TSB

h1200 mm

UV glued glass downward opening hinged on bright aluminum profile, side glasses with anti-fog treatment, bright aluminum LED light fixture. PETG easy sliding doors system, anti-fog front air baffle.



UV glued glass downward opening

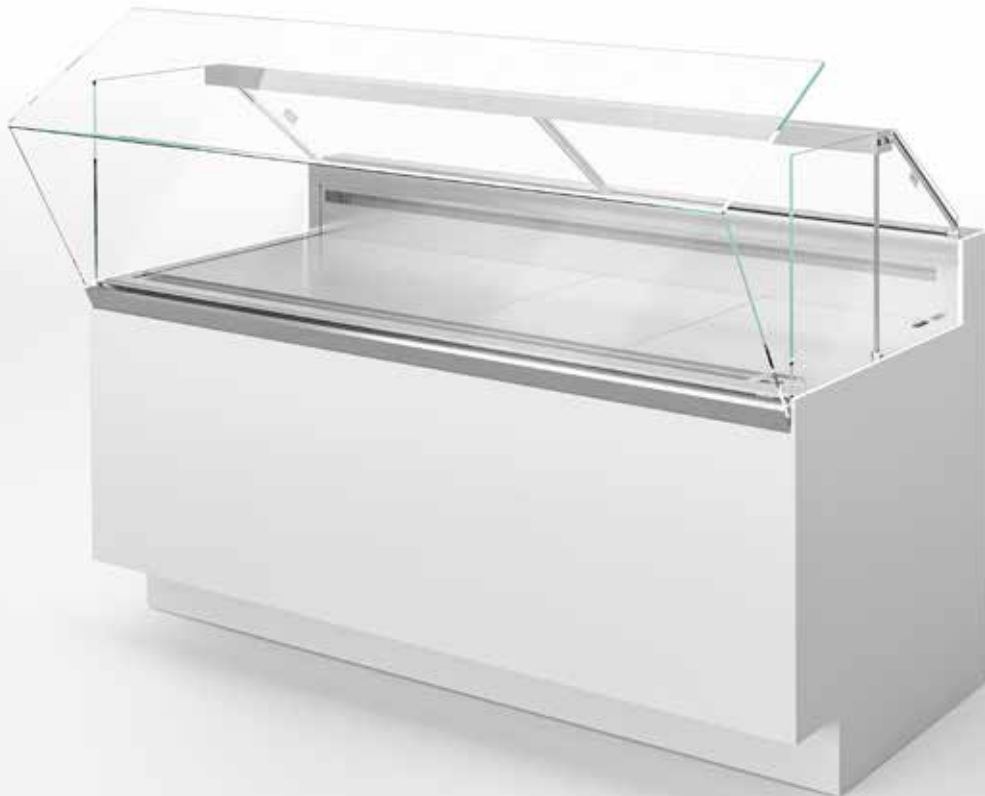

R6


h1300 mm

Front glass with power assisted lift-up opening system. Heated glass sides, bright aluminum LED light fixture, bright aluminum side profiles, fixed glass top, PETG easy sliding doors system. Front glass with ventilated anti-fog system and heated air (optional).



Front glass with power assisted lift-up opening system and bright aluminum side profiles.



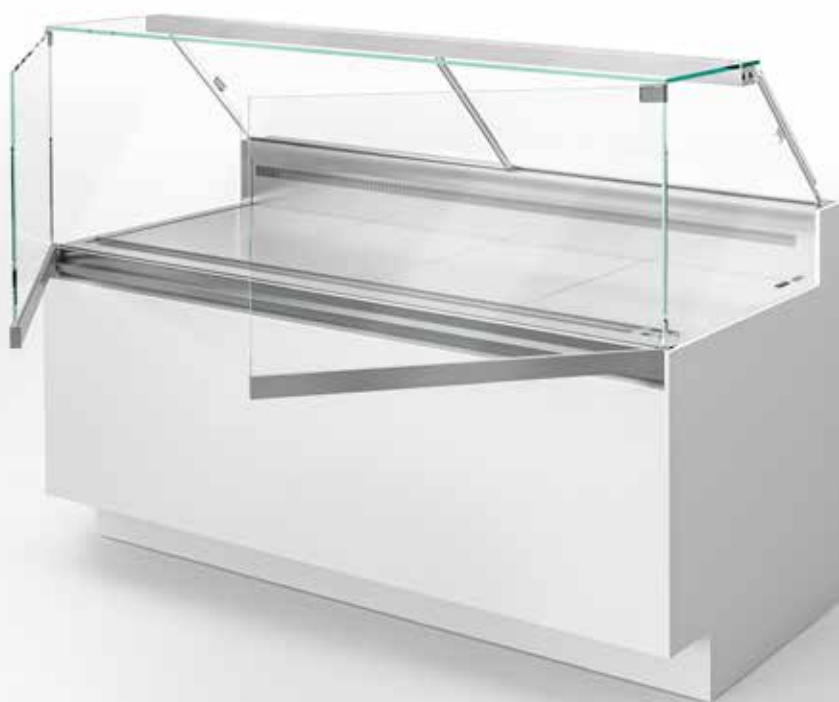

W1

h1300 mm

Tempered front glasses which can be opened as hinged doors, lower profile and upper hinge in polished aluminum, heated sides with NoFog system, bright aluminum LED light fixture, fixed glass top. PETG easy sliding doors system, glass air baffle (NoFog as an option).



Dettaglio dell'apertura dei vetri frontali

G1

h1200 mm

Innovative patented glass structure. Heated glass sides, sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps, glass top on customer side with upward opening, front and side LED light fixture, bright aluminum profiles.



Glass top with upward opening.





R2

h1200 mm

Double sliding UV glued glass bridge with soft closing system.
Heated glass sides, bright aluminum LED light fixture, anti-fog
front air baffle.



Bright aluminum LED light fixture.



Thermodynamics

6040 showcases provide superlative performance thanks to a ventilated refrigerated system with an oversized evaporator that ensures very high internal humidity perfect for displaying and storing quality artisan products.




Single air-flow

R290 built-in condensing unit


All built-in condensing units are hermetic and use the eco-friendly gas R290, which ensures minimal environmental impact and significant energy savings.

NoFog


The perfect transparency and lightness of the showcase is the basis of a quality display, which is why CIAM has patented an innovative anti-fog system that involves the use of 8mm-thick pyrolytic glass with low-voltage electrical resistances, so the effect of a classic glass showcase is achieved even with the use of heated glass.



R290 built-in condensing unit

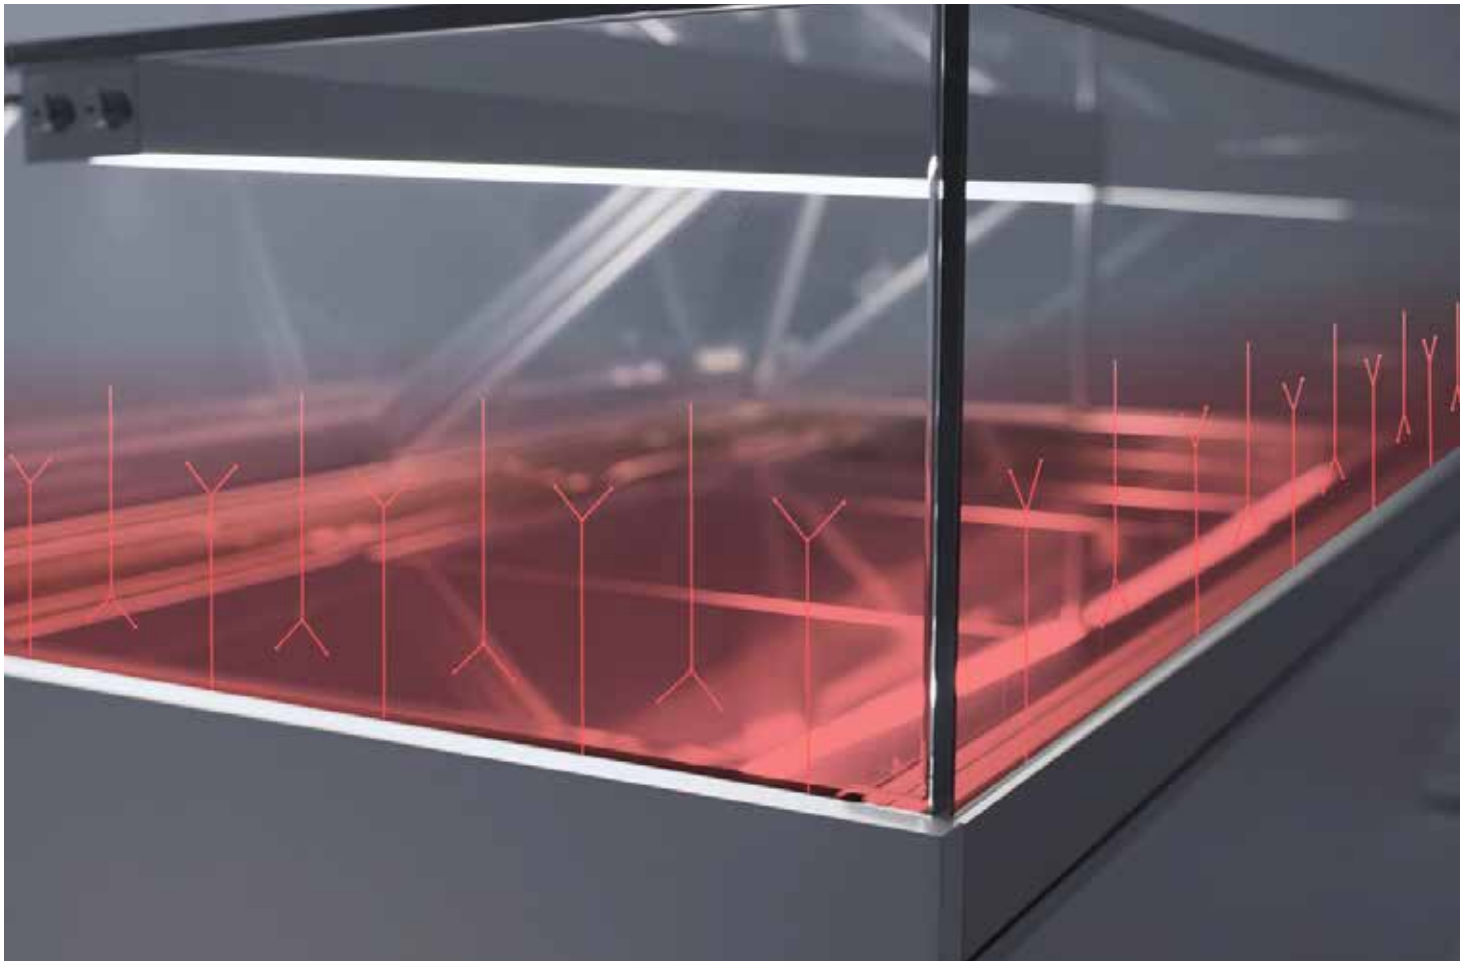

NoFog technology

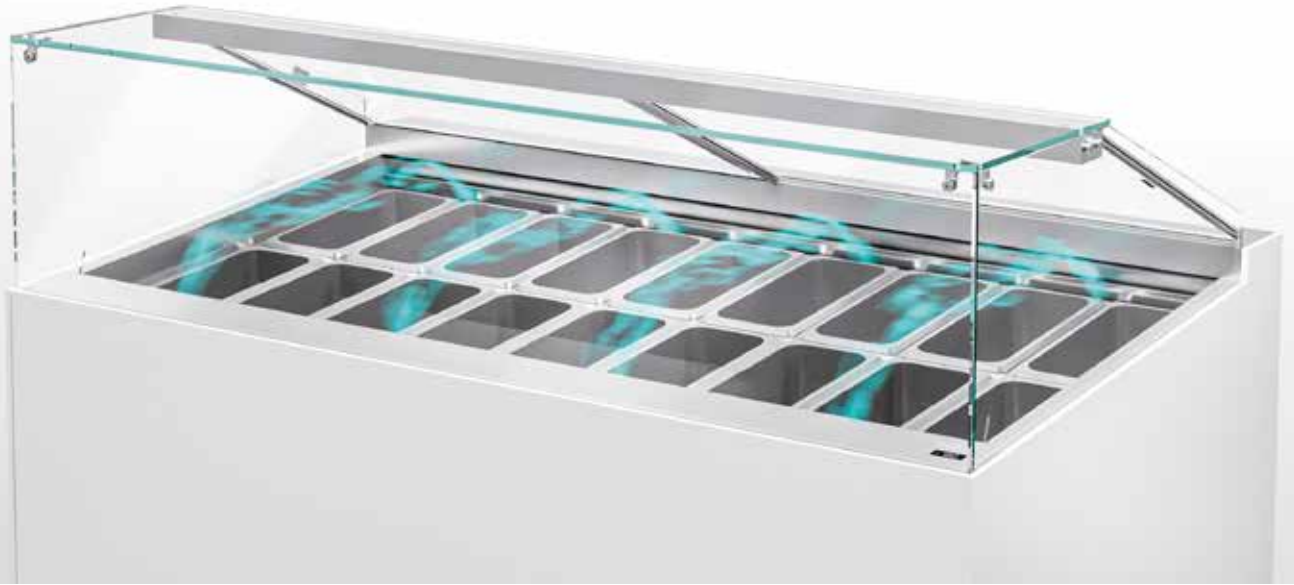

Gelato showcase with single air-flow

Gelato showcase with single air-flow

P1000 gelato display cabinets can be supplied with single- air flow, which allows for the insertion of storage ice cream pans.

Gelato showcase with double air-flow

P1000 gelato display cabinets can be supplied with double air flow, which ensures perfect temperature equalization on all ice cream pans.

Gelato showcase with lowered side arrangement

All gelato showcases can be supplied in the version with a lowered side panel that ensures perfect channeling in aesthetic continuity with the pastry models.



Gelato showcase with double air-flow




Gelato showcase with lowered side arrangement



Combi

Model 6040 is also available in a Combi version, which is ideal for expanding sales offerings. This version combines a refrigerated self-service compartment with a glazed one for assisted sales.

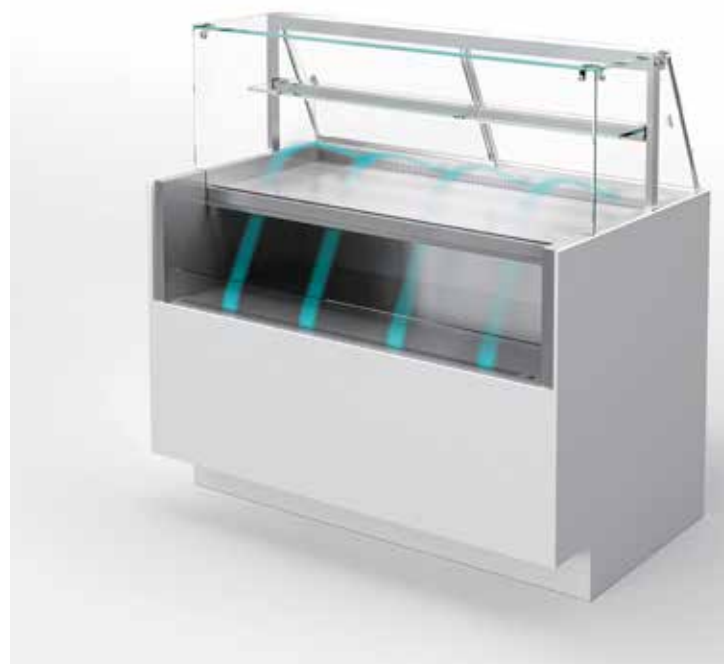

MULTIX

50 kWh

Energy saving showcase
per linear meter


40%

Energy saving compared
to traditional systems

MULTIX technology can be applied to the showcases 6040 and it allows to adjust temperature and humidity through a simple and intuitive electronic touch screen panel according to the customer needs (patented system). Thanks to the inverter technology and to the control Software with Technology by Gelsystem it is possible to have the highest efficiency and the highest performance on the product because the curve of the temperature and especially that of the humidity is constant and it is not stressed by sudden fluctuations as there are no electrical resistances; in fact the heat is generated via hot gas injections. The inverter technology also guarantees great energy and economical savings.



The new smart refrigeration system

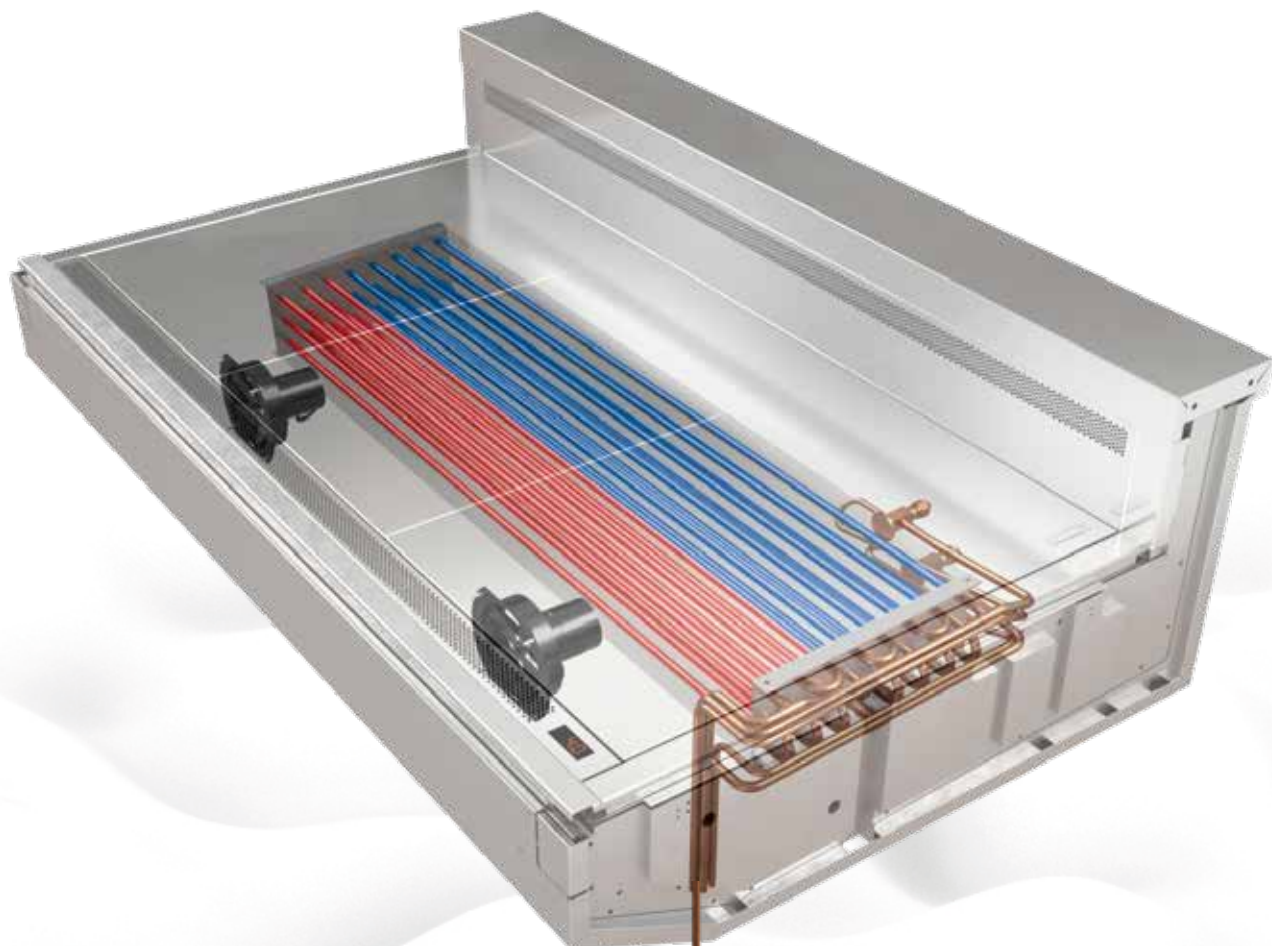

Through a touch screen panel it is possible to choose up to four different preset programs or to adjust temperature and humidity



Multix gets the advantages of the inverter technology and hot gas injections to control humidity, without electric resistances.



LED light fixture

Lighting

Lighting with 3000°K diffused LEDs is perfect for enhancing the products displayed in our showcases. The LED strips are integrated in unique aluminum light fixture, both in the ceiling and fixed shelf versions and in the innovative version integrated with the height- and depth-adjustable shelf on a low-voltage electrified rod.

Features

QR code

In the technical compartment there is a product label with a QR code from which user and maintenance manuals and other technical content related to the product can be downloaded.

Liftable evaporator unit

The evaporator unit can be supplied in the power-assisted lift-up version, this facilitates cleaning of the tank bottom.



Product label with QR code



Liftable evaporator unit



Electronics

CIAM CONNECT



Connectivity

The device allows remote control of the showcase thanks to connectivity with a Sim card that does not require wi-fi or a connection to the premises data.



Remote control

Through the Cloud portal you can interact with the showcase, by downloading the operating graphics, monitoring alarms and product performance directly online.

Key features

1. Customization of panels, finishes and internal materials.
2. Customization of dimensions on specific requests.
3. Possibility to have two or more showcases joined together with the same aesthetics.
4. Eco-friendly gas R290 for built-in condensing units.
5. Wide range: 12 linear models, 3 corner models, 4 depths (625, 800, 1000, 1100), as many as 16 types of glass gantries, 11 types of technological systems.
6. High humidity that enhances the perfect product preservation.
7. Adjustable shelves in height and depth on low voltage electrified rack. In this way it is possible to customize the display of the showcase without electric cables.
8. Sliding doors with hermetic perimeter seals on operator side that guarantee a hermetic closing of the refrigerated compartment.
9. ETL certification available for all the models (Canadian and north American markets).


Optional




Compatibility with tube/white (patented system) for constant sanitation of internal surfaces



Compatibility with MULTIX (patented system)




Anti-fog system for glasses (patented system)




Magnetic filter for an easy cleaning of the condenser



Remote control system for the constant monitoring of the showcase proper functioning




Showcases at positive temperature can be converted to be used for pralines.




Showcases at low temperature can be converted into positive temperature



Wheels kit



Liftable evaporator unit with gas pistons for a perfect cleaning of the tank



Possibility to add a storage module



PAIN & BRIOCHE

CAFÉ

Depuis 1913

DUPONT
avec un thé

Dupont avec un thé - Neuilly-sur-Seine

PÂTISSERIE



Glass structures

R4 - H1200



R4 - H1350



TS - H1200



TS - H1350



TSB - H1200



S2 - H1200



S2 - H1440



S2 - H1500



R4UP - H1200



R4UP - H1350



G1 - H1200



C4 - H1200



C4 - H1350



R2 - H1200



W1 - H1300



R6 - H1300



	GLASSES OPENING	ANTI-FOGGING OF FRONT GLASS	ANTI-FOGGING OF SIDE GLASS	NUMBER OF SHELVES
TS H1200	UV glued glass	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)
TS H1350	UV glued glass	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 1 adjustable shelf on electrified rack (Std) Additional adjustable shelf (Opt)
R4 H1200	UV glued glass with mechanical fastening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)
R4 H1350	UV glued glass with mechanical fastening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 1 adjustable shelf on electrified rack (Std) Additional adjustable shelf (Opt)
R4UP H1200	Upward opening of the top glass with micro-hinges	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)
R4UP H1350	Upward opening of the top glass with micro-hinges	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 1 adjustable shelf on electrified rack (Std) Additional adjustable shelf (Opt)
C4 H1200	Glass structure with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)
C4 H1350	Glass structure with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 1 adjustable shelf on electrified rack (Std) Additional adjustable shelf (Opt)
TSB H1200	UV glued glass with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)

NB: All ice-cream showcases have heated front glass with no-fog system as standard















OPENING OF SIDE OPERATOR	STRIP-LED DIFFUSED LIGHTING	ALUMINUM PROFILES FINISHES	HARDWARE FINISHES	LINEAR MODULES	SQUARED CORNER 90° SQ	CURVE CORNER 90° SF	CURVE CORNER AP 45° SF
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•		
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•		
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•			
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•		

	GLASSES OPENING	ANTI-FOGGING OF FRONT GLASS	ANTI-FOGGING OF SIDE GLASS	NUMBER OF SHELVES
W1 H1300	Tempered glass structure which can be opened as hinged doors	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf (Opt)
S2 H1200	Glass structure with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr .1 fixed shelf (Std)
S2 H1350	Glass structure with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 2 fixed shelves (Std)
S2 H1500	Glass structure with downward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	Nr. 3 fixed shelves (Std)
R6 H1300	Glass structure with power assisted lift-up opening system	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf (Opt)
G1 H1200	Sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps, glass top on customer side with upward opening	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std)
R2 H1200	Double sliding UV glued glass bridge	Glass air baffle (Std) Heated glass (Opt)	Heated glass (Std)	No shelf (Std) Fixed shelf Adjustable shelf on electrified rack (Opt)

NB: All ice-cream showcases have heated front glass with no-fog system as standard

OPENING OF SIDE OPERATOR	STRIP-LED DIFFUSED LIGHTING	ALUMINUM PROFILES FINISHES	HARDWARE FINISHES	LINEAR MODULES	SQUARED CORNER 90° SQ	CURVE CORNER 90° SF	CURVE CORNER AP 45° SF
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•	•	•
Inclined PETG sliding doors with perimeter seals (std) 90° sliding doors (opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•	•		
Sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps (std)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•			
Double sliding UV glued glass bridge	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	Bright aluminum (Std) Powder-coating s/s Electroplating (Opt)	Chrome-plated steel (Std) RAL (Opt)	•			

Technical features

	ENERGETICAL CLASS	OPERATING TEMP.	GAS	WORKING TOP	DISPLAY AREA	P625	P800	P1000	P1100
VENTILATED REFRIGERATED SHOWCASE	A+ G F	+4° C	Built-in compr. R290/ R455A Remote compr. R452A	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel brass powder-coated stainless steel electroplating acrylic HPL Gres Quartz composite marble (Opt)				
STATIC REFRIGERATED SHOWCASE WITH COIL	-	+4° C	Built-in compr. R290/ R455A Remote compr. R452A	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel brass powder-coated stainless steel electroplating acrylic HPL Gres Quartz composite marble (Opt)				
COMBI H1 SHOWCASE	A+ G F	+4° C	Built-in compr. R290 Remote compr. R452A	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel powder-coated stainless steel (Opt)				
COMBI M1 SHOWCASE	A+ G F	+4° C	Built-in compr. R455a Remote compr. R452A	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel powder-coated stainless steel (Opt)				
BUTCHERY SHOWCASE	A+ G F	+2° C	Built-in compr. R455a Remote compr. R452A	Polished stainless steel (Std) Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel brass powder-coated stainless steel electroplating acrylic HPL Gres Quartz composite marble (Opt)				
DELI SHOWCASE	A+ G F	+4° C	Built-in compr. R455a Remote compr. R452A	Polished stainless steel (Std) Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel brass powder-coated stainless steel electroplating acrylic HPL Gres Quartz composite marble (Opt)				

• • • • • • • • • • • • •















• • • • • • • • • •

• • • • •

• • • • •

• • • • • • • • • • • •

• • • • • • • • • •

	ENERGETICAL CLASS	OPERATING TEMP.	GAS	WORKING TOP	DISPLAY AREA	P625	P800	P1000	P1100
GELATO SHOWCASE		-18°C	Built-in compr. R290 Remote compr. R452A	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel powder-coated stainless steel (Opt)				
BAIN-MARIE WARM SHOWCASE	-	+80° C	-	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	GN Gastronorm trays housing (Std) Polished steel perforated plates (Opt)				
DRY-WARM SHOWCASE	-	+80° C	-	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel powder-coated stainless steel (Opt)				
BREAD SHOWCASE	-	Room temperature	-	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Solid wood staves (Std)				
AMBIENT SHOWCASE	-	Room temperature	-	Brushed stainless steel acrylic HPL Gres Quartz composite marble (Opt)	Polished stainless steel (Std) Brushed stainless steel brass powder-coated stainless steel electroplating acrylic HPL Gres Quartz composite marble (Opt)				

P60
6 pans

P80
12 pans

P100
12 pans

P60
9 pans

P80
18
pans

P100
18
pans

P60
12
vasche

P80
24
vasche

P100
24
vasche



3x
GN 1/1
□•□•□

4x
GN 1/1
□•□•□•□

(3+3) x
GN 1/1
□•□•□•□•□



CIAM