



RANGES WITH ADJUSTABLE LEGS



PR6-N

MODEL # _____
ITEM # _____ QUANTITY _____
APPROVAL _____

Natural Gas Models	Propane Gas Models	Size
PR4-N	PR4-P	1 Oven, 4 Burners
PR6-N	PR6-P	1 Oven, 6 Burners
PR10-N	PR10-P	2 Ovens, 10 Burners

Standard Features


- Stainless steel front with a 24 3/4" high back riser and shelf
- Aluminum sides
- Heavy duty steel frame
- 30,000 BTU cast iron burners with individual pilot lights
 - Heavy duty 12" x 12" removable cast iron grates
 - Instant light flame adjustable control knobs
- Full size oven with 30,000 BTU oven burner
 - Adjustable thermostat: 250°F - 550°F, accurate to ±1°F
 - Flame failure safety device
 - Cool to touch oven door handle
 - Compression spring door system
 - Two easily removable adjustable oven racks
 - Porcelain oven liner
 - PR6 and PR10 units hold full size sheet pans
- Removable crumb tray under the top burners
- All ranges are shipped as natural gas and have a conversion kit included to connect to propane
 - Rear gas connection 3/4" NPT
 - Natural gas 4.0" W.C.
 - Propane gas 10.0" W.C.
- Recommended incoming pressure:
 - Natural gas 4.5" W.C. with not more than a 1/2" W.C. pressure drop
 - Propane gas 10.5" W.C. with not more than a 1/2" W.C. pressure drop
- If using a commercial flex, it must comply with ANSI Z 21.69
- Four 6" adjustable legs for PR4 and PR6 units and six 6" adjustable legs for PR10 units; pre-installed
- ETL listed, conforms to NSF/ANSI Std 4
- Installation clearance: from wall - 2", from sides - 2", from floor - 6"

Warranty - 1 year parts and labor



RANGES WITH ADJUSTABLE LEGS


PR4-N/PR4-P

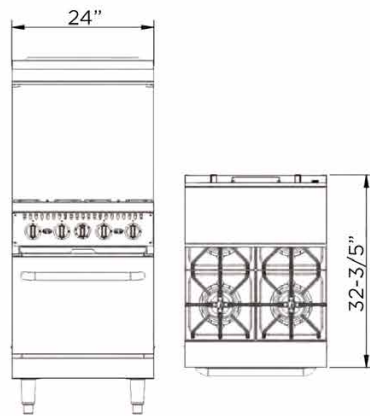


SIDE VIEW (ALL)



PR6-N/PR6-P

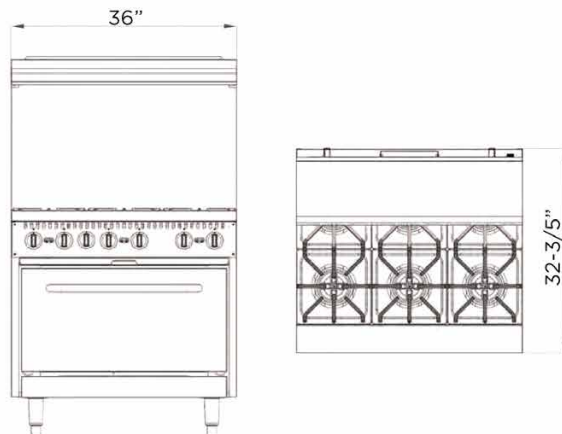

PR10-N/PR10-P

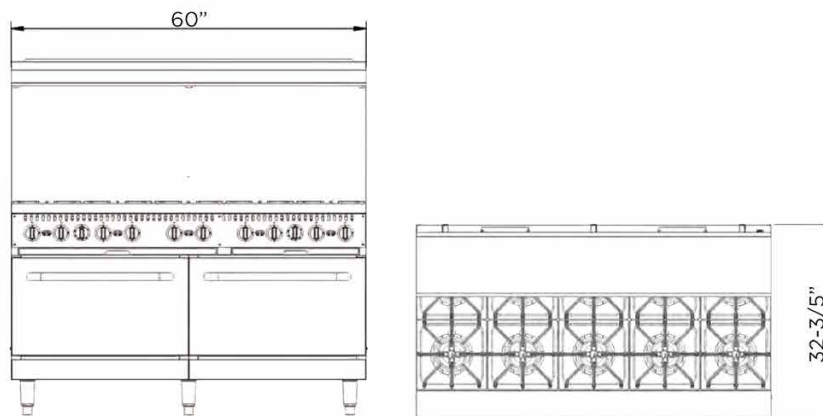

Natural Gas Model Numbers	Propane Gas Model Numbers	Ovens/Burners	External Dimensions (Inches)			Internal Oven Dimensions (Inches)			BTU's (per burner)	BTU's (per oven)	Total BTU's	Ship Weight (lbs)
			W	D	H	W	D	H				
PR4-N	PR4-P	1/4	24	32 3/5	36 + 24 3/5	20 3/5	25 4/5	13 3/4	30,000	30,000	150,000	356
PR6-N	PR6-P	1/6	36	32 3/5	36 + 24 3/5	26 4/5	25 4/5	13 3/4	30,000	30,000	210,000	455
PR10-N	PR10-P	2/10	60	32 3/5	36 + 24 3/5	26 4/5	25 4/5	13 3/4	30,000	30,000 x 2	360,000	737

Specifications are subject to change.

GROUP A 0521