

DESIGNER LINE DISPLAY ROLL-THRU WARMER

Model: DL2WI-RT-GD-SD *Designer Line*

2-Section Display Roll-Thru Warmer
Glass Doors on Front, Stainless Steel
Doors on Rear with 66¼” Cart Capacity

- DL2WI-RT-GD-SD - Stainless steel front, aluminum end panels and interior
- DL2WI-SA-RT-GD-SD - Stainless steel exterior, aluminum interior
- DL2WI-SS-RT-GD-SD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Custom laminates
Rehinging of doors (consult factory)	

Consult factory for other model configurations, options and accessories.



Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

HEATING SYSTEM

- Self contained, performance rated “plug” heating system
- 90°F to 180°F temperature range
- Unique air flow distribution ducts

CABINET ARCHITECTURE

- 3” non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handles
- Triple-Pane, tempered hinged glass doors
- Cam action, lift off hinges
- Magnetic snap in Santoprene™ door gaskets
- Cylinder lock in each door
- Self-closing doors
- 66 ½” high door opening (66 ¼”H rack capacity*)

MODEL FEATURES

- Electronic controller with digital display & hi-low alarm
- Cabinet upper side panels and refrigeration “plug” system can be removed and reinstalled at job site
- Removable stainless steel rack guides
- Removable stainless steel ramps
- Reinforced stainless steel floor

* Racks not supplied

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	64 (1626 l)
Width, Overall (inches)	68 1/2 (1740 mm)
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	98 (2489 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	4
Rack Capacity** (per section)	2

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	13.9 (13.9)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	168 (4757 cu l)
Weight Std - Crated (pounds)	800 (363 kg)
Weight SS - Crated (pounds)	800 (363 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

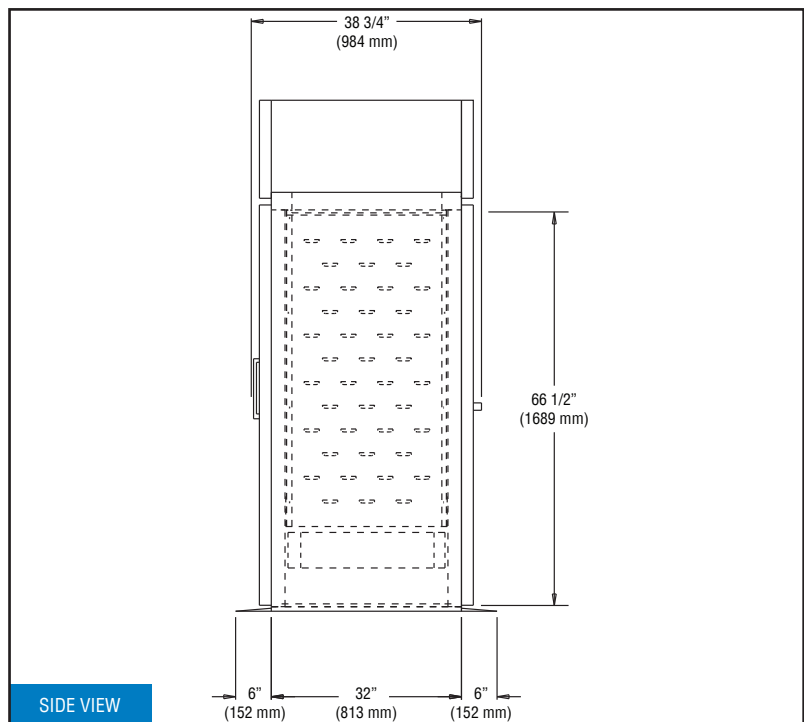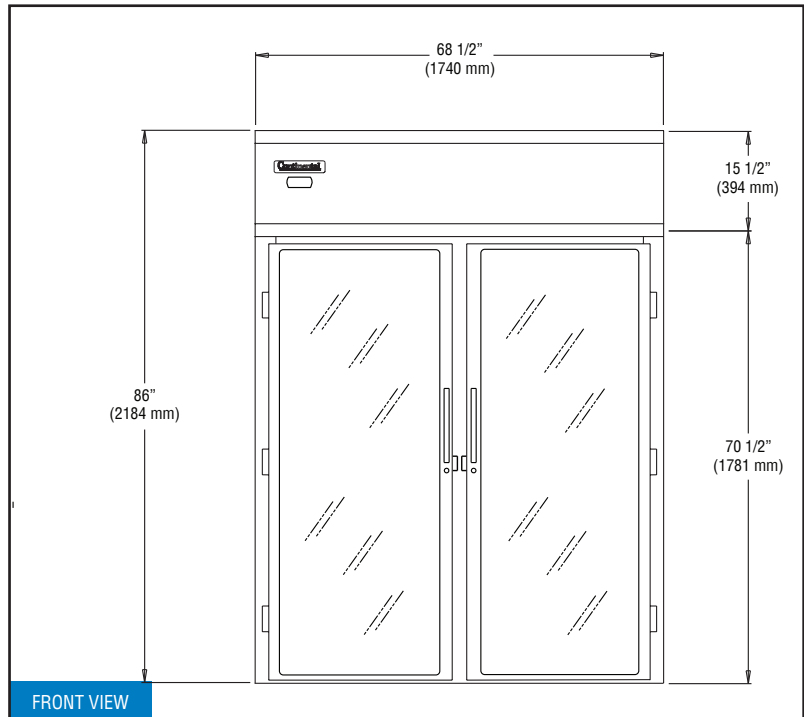

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 6/19/25