

# DESIGNER LINE DISPLAY ROLL-THRU WARMER

**Model: DL1WI-RT-GD-SD** *Designer Line*

1-Section Display Roll-Thru Warmer  
Glass Door on Front, Solid Door on  
Rear with 66¼” Cart Capacity

**DL1WI-RT-GD-SD** - Stainless steel front, aluminum end panels and interior  
**DL1WI-SA-RT-GD-SD** - Stainless steel exterior, aluminum interior  
**DL1WI-SS-RT-GD-SD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

Epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Custom laminates
Rehinging of doors (consult factory)	

Consult factory for other model configurations, options and accessories.



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### HEATING SYSTEM

Self contained, performance rated “plug” heating system  
90°F to 180°F temperature range  
Unique air flow distribution ducts

### CABINET ARCHITECTURE

3” non-CFC polyurethane foam insulation  
Smooth, polished chrome workflow door handles  
Triple-Pane, tempered hinged glass doors  
Cam action, lift off hinges  
Magnetic snap in Santoprene™ door gaskets  
Cylinder lock in each door  
Self-closing doors  
66 ½” high door opening (66 ¼”H rack capacity\*)

### MODEL FEATURES

Electronic controller with digital display & hi-low alarm  
Cabinet upper side panels and refrigeration “plug” system can be removed and reinstalled at job site  
Removable stainless steel rack guides  
Removable stainless steel ramps  
Reinforced stainless steel floor

\* Racks not supplied

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

Net Capacity (cubic feet)	32 (813 l)
Width, Overall (inches)	35 1/4 (895 mm)
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	98 (2489 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	2
Rack Capacity**	1

## ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	7.3 (7.3)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (International)	No (No)

## SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	43 (1092 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	94 (2661 cu l)
Weight Std - Crated (pounds)	300 (137 kg)
Weight SS - Crated (pounds)	475 (216 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

# Model Plan Views

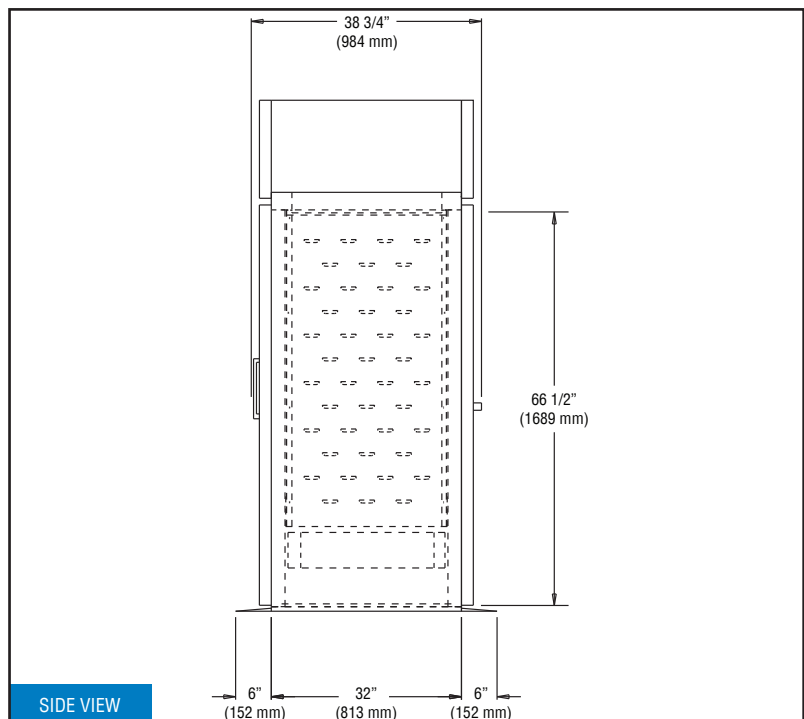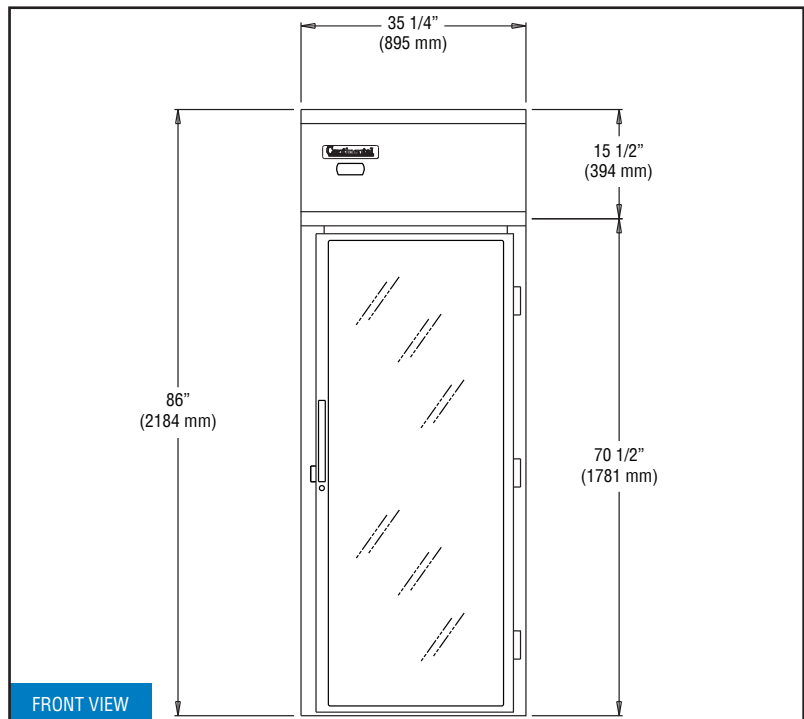

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
 DESIGNED & ASSEMBLED  
 IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
 A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 6/19/25