

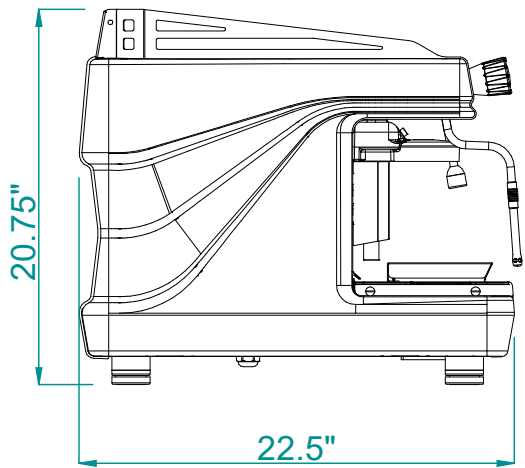


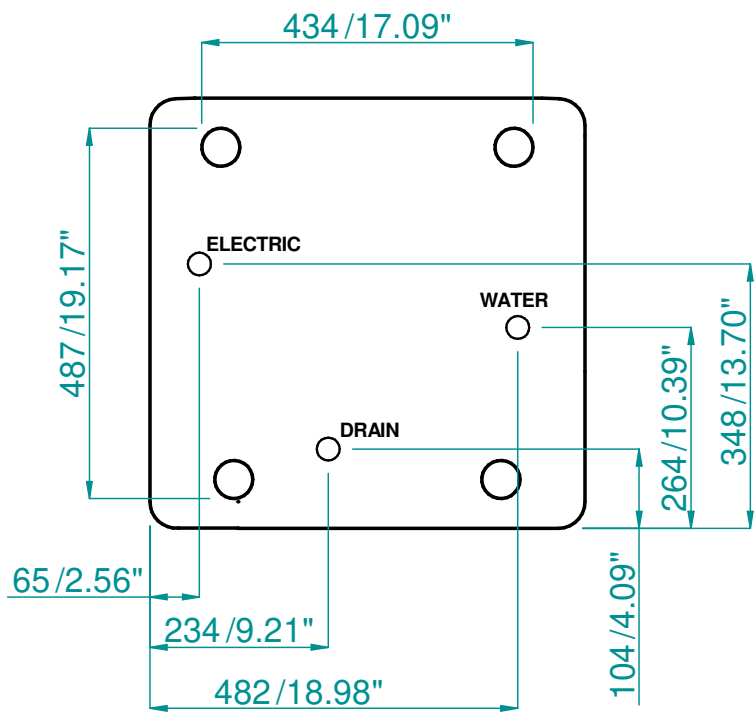

SPECIFICATIONS

- Two-group fully automatic electronic espresso machine with 1 to 4 cup simultaneous delivery capability
- Copper inner boiler continuous heat circulation
- Elevated group to fit tall size cups with little grid sliding to accommodate cups from 3,15" to 4,14".
- Heat-balancing units with pre-infusion for optimal espresso extraction
- Four portion selectors for group with continuous delivery and a stop button.
- 1 Steamspouts / 1 Hot/cool water pipe
- Internal Motor pump
- Automatic boiler water level control
- Ideal for any size operation of espresso bar, hotel, restaurant or cafe featuring advanced technology and ultra-modern design for today'
- Available colors: Blue, Black, White

OPERA 5

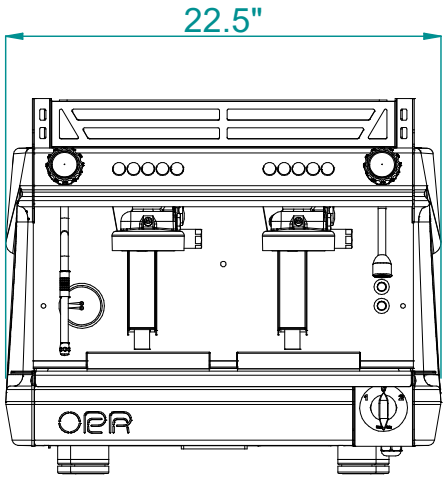

FRONT (BOTTOM VIEW)

BREW DEVICE	CUPS PER GROUP	W / D / H	BOILER CAP	V.	AMP.	PH.	WATTS	WT. (Kg/lbs)	INCOMING H2O	DRAIN	MIN/MAX bar
								SHIP. WT. (Kg/lbs)			
2	2	22.5" W 22.5" D 20.75" H	5 lt. 1.3 Us Gal	120	20	1	1800	45/99	3/8" MALE	Ø9mm INTERNAL	2 / 5
				220 240			2500-2900	60/132			