



Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301



Model: THCF-46

### OPTIONS:

- 14ga tops
- Internal Locking Device
- No drain, dri heat only in hot mode
- Hugged edge
- Hinged framed doors (operators side)
- Foodguards
- Tray Slides
- 6" S/S legs
- Kickplates (painted or stainless)
- 34" ADA height with 3.5" adjustable casters

### Agency Listings:



DUKE MANUFACTURING CO.  
 2305 N. Broadway  
 St. Louis, MO 63102  
 800.735.3853 Toll Free  
 314.231.5074 Fax  
 www.dukemfg.com  
 SS-1308 Thurmaduke HotCold Freeze

**Approval Stamp(s):**

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL: Thurmaduke Serving System  
with HotColdFreeze™ flexible well appliance

- THCF-32      1 Well
- THCF-46      2 Well
- THCF-60      3 Well
- THCF-76      4 Well
- THCF-92      5 Well

### TOP and BODY:

- 16-gauge, 300 series powder coat paint or stainless steel top,
- Drop in appliance with 90-degree turndown edge
- Hinged louvered panels on operators' side


### HCF:

- Flush mount with no recess
- 2.5", 4" and 6" deep pans

### CONTROLS:

- Intuitive, easy to use touch screen control changes mode of operation
- 3 wet heat, 3 dry heat, 3 refrigerated and 1 freeze mode.
- 1 control per food well


### Refrigeration:

- 5 Year compressor replacement
- Compressor slides out 15.375" for easy service.
- Refrigerant R290 

### Serviceability:

- Unit can be serviced in counter, no need to remove.

Specification subject to change




R290 Thurmaduke HotColdFreeze™

Catalog No. Hot-Cold Holding

A.I.A. File No. 35-C-13

# Thurmaduke Serving System with HotColdFreeze™

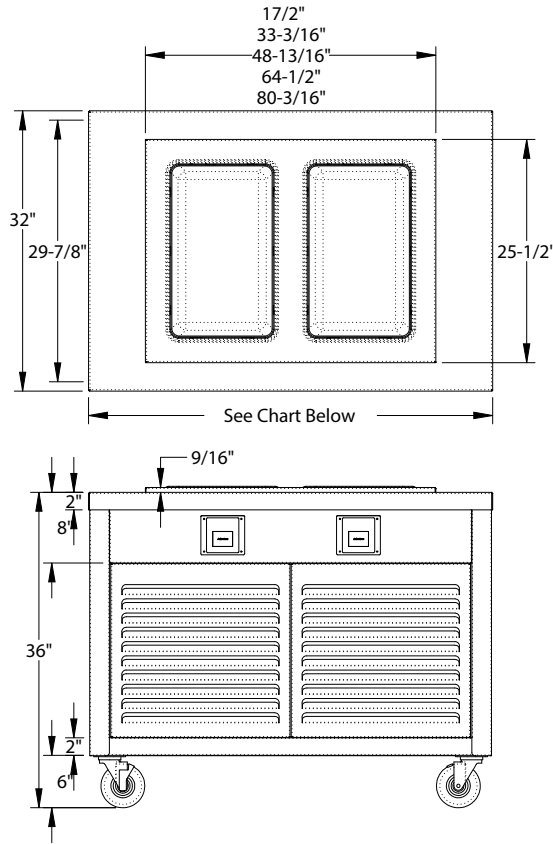

**DIMENSIONS:**

**Freight Class: 150**

Model	Height		Length		Depth		Cube ft. Crated	Crated Ship Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
THCF-32	36.0	91.44	32	81.3	32.0	81.28	34.8	280	127.0
THCF-46	36.0	91.44	46	116.8	32.0	81.28	47.7	379	171.9
THCF-60	36.0	91.44	60	152.4	32.0	81.28	60.5	425	192.8
THCF-76	36.0	91.44	76	193.1	32.0	81.28	79.2	570	258.6
THCF-92	36.0	91.44	92	233.7	32.0	81.28	95.9	634	287.6

**ELECTRICAL SPECIFICATIONS:**

Model	120V/60Hz		120 / 208V 60Hz		120 / 240V 60Hz		Refrigeration			Minimum Room ≥ A m <sup>2</sup> Floor Area Required		
	Amps	NEMA	Amps	NEMA	Amps	NEMA	HP	Refrig.	Grams	(A) Square Meters (m <sup>2</sup> )	Square Feet (f <sup>2</sup> )	
THCF-32	5.5	5-15P	5.5	L14-20P	5.5	L14-20P	1/3	R290	100	4.785	51.51	
THCF-46	10.7	5-15P	10.0	L14-20P	10.0	L14-20P	1/3	R290	170	8.134	87.55	
THCF-60	18.4	L5-30P	18.4	L14-30P	18.4	L14-30P	1/2	R290	220	10.526	113.30	
THCF-76	23.6	L5-30P	18.4	L14-30P	18.4	L14-30P	1/2	R290	300	14.354	154.51	
THCF-92	29.1	5-50P	28.4	14-50P	28.4	14-50P	Sys-1	1/3	R290	170	10.526	113.30
							Sys-2	1/2	R290	220		



**Duke Manufacturing Co.**  
2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)

This product may be covered by one or more patents or pending patent applications.  
For more details, see [www.dukemfg.com/patents](http://www.dukemfg.com/patents)

Printed in U.S.A.  
© 2025, Duke Manufacturing Co.