

Merchandising Swing Glass Door Refrigerator

- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).

- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy T: without canopy




MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSC188VCW	1	4	19 5/8*23 1/2*60 1/4 500*596*1531	6.4 181	1/5	2.2	115/60/1	5-15P
VSC198VTW	1	4	19 5/8*23 1/2*60 1/4 500*596*1531	6.6 188	1/5	2.2	115/60/1	5-15P
VSC288VCW	1	4	19 5/8*23 1/2*70 7/8 550*596*1801	8.8 249	1/5	2.3	115/60/1	5-15P
VSC298VTW	1	4	19 5/8*23 1/2*70 7/8 550*596*1801	9.1 258	1/5	2.3	115/60/1	5-15P
VSC388VCW	1	4	23 3/8*24 5/8*76 5/8 595*626*1946	12.3 348	1/5	2.4	115/60/1	5-15P
VSC398VTW	1	4	23 3/8*24 5/8*76 5/8 595*626*1946	12.6 356	1/5	2.4	115/60/1	5-15P
VSC488VCW	1	4	27 1/2*26 5/8*76 5/8 700*676*1946	16.5 468	1/5	2.6	115/60/1	5-15P
VSC498VTW	1	4	27 1/2*26 5/8*76 5/8 700*676*1946	16.9 478	1/5	2.6	115/60/1	5-15P


Merchandising Swing Glass Door Refrigerator

- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).

- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy T: without canopy

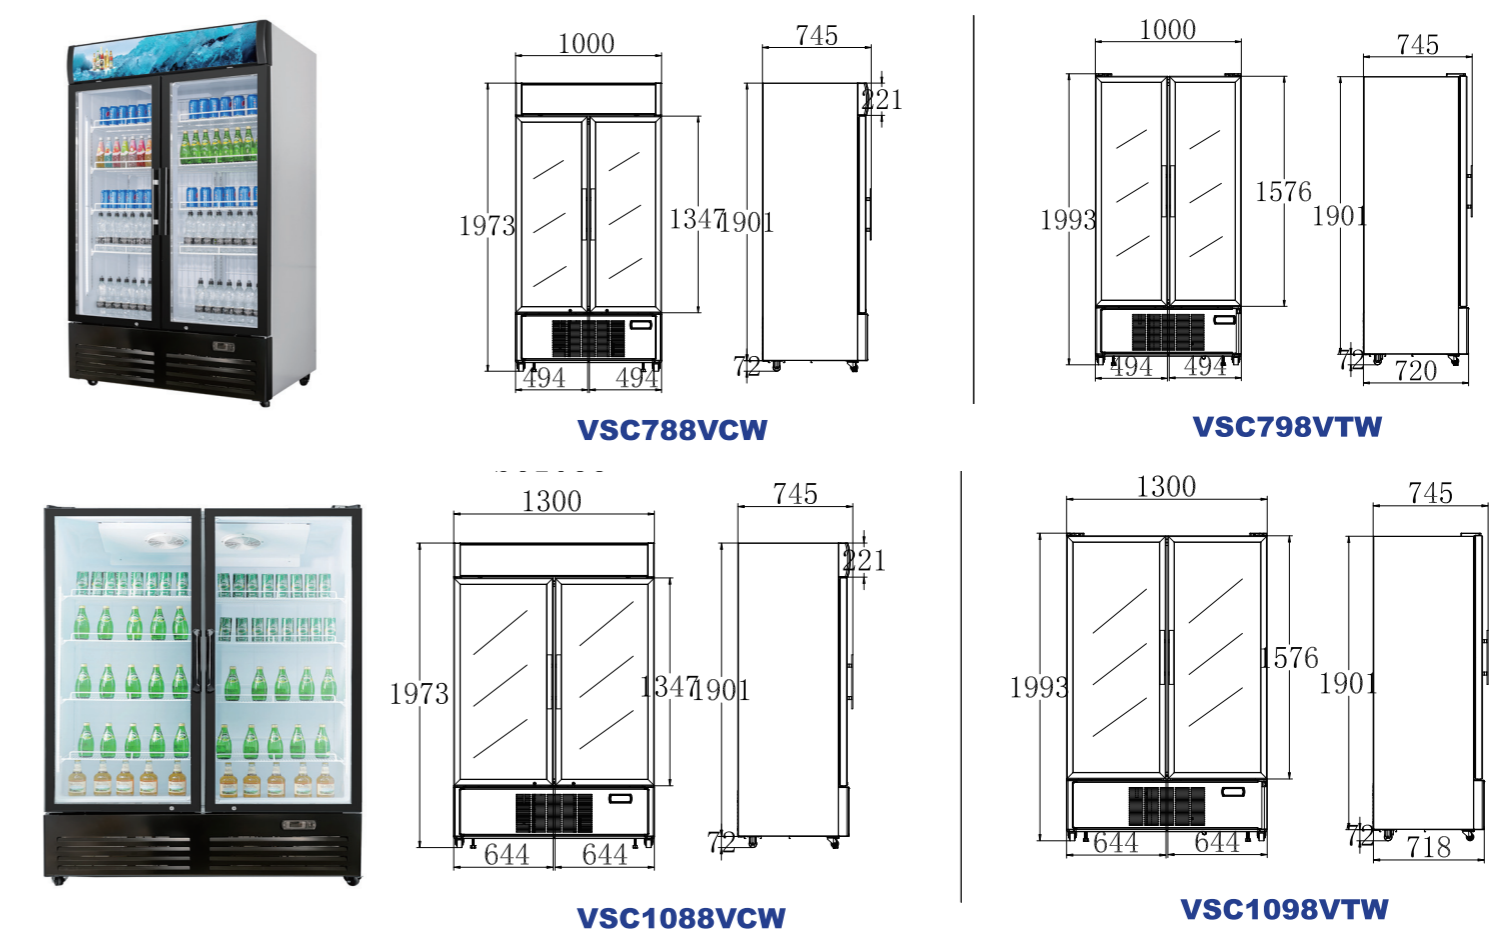

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSC788VCW	2	8	39 3/8*29 3/8*77 5/8 1000*745*1973	26 736	1/4+	6	115/60/1	5-15P
VSC798VTW	2	8	39 3/8*29 3/8*77 5/8 1000*745*1973	26.5 751	1/4+	6	115/60/1	5-15P
VSC1088VCW	2	8	51 1/8*29 3/8*77 5/8 1300*745*1973	35.3 1001	1/4+	6	115/60/1	5-15P
VSC1098VTW	2	8	51 1/8*29 3/8*77 5/8 1300*745*1973	36 1020	1/4+	6	115/60/1	5-15P




VITLIFE AMERICA LLC
4320 WINFIELD RD, WARRENVILLE, IL 60555
Tel: 800 604 5402
Email: info@vitlifecommercial.com
www.vitlifecommercial.com




VITLIFE AMERICA LLC
4320 WINFIELD RD, WARRENVILLE, IL 60555
Tel: 800 604 5402
Email: info@vitlifecommercial.com
www.vitlifecommercial.com

Merchandising Sliding Door Refrigerator


- Ventilated cooling system, auto defrost.
- Exterior: Coated steel.
Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5°C to 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- C: with canopy T: without canopy

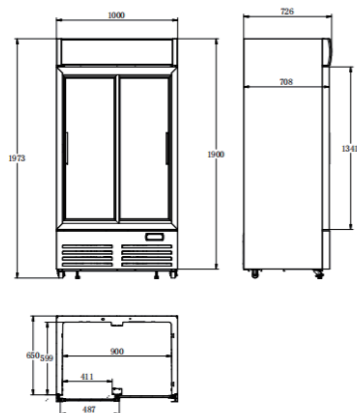


VSC788VCS

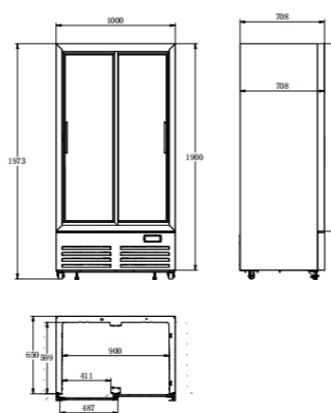

VSC798VTS

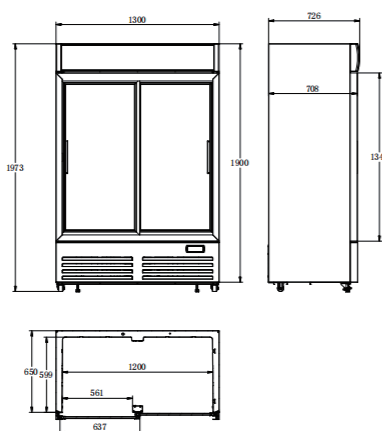

VSC1088VCS

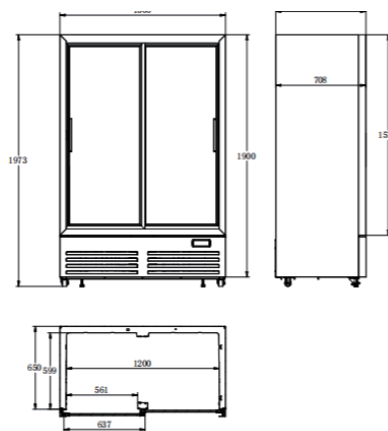

VSC1098VTS

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSC788VCS	2	8	39 3/8*29 3/8*77 5/8 1000*745*1973	26 736	1/4+	6	115/60/1	5-15P
VSC798VTS	2	8	39 3/8*29 3/8*77 5/8 1000*745*1973	26.5 751	1/4+	6	115/60/1	5-15P
VSC1088VCS	2	8	51 1/8*29 3/8*77 5/8 1300*745*1973	35.3 1001	1/4+	6	115/60/1	5-15P
VSC1098VTS	2	8	51 1/8*29 3/8*77 5/8 1300*745*1973	36 1020	1/4+	6	115/60/1	5-15P



VITLIFE AMERICA LLC
 4320 WINFIELD RD ,WARRENVILLE, IL 60555
 Tel: 800 604 5402
 Email : info@vitlifecommercial.com
 www.vitlifecommercial.com

VITLIFE AMERICA LLC
 4320 WINFIELD RD ,WARRENVILLE, IL 60555
 Tel: 800 604 5402
 Email : info@vitlifecommercial.com
 www.vitlifecommercial.com