

3TEMP wall

Installation Requirements

SIMONELLI | GROUP
NORTH AMERICA

☐ Water

- 3/8" dedicated cold water line with shut-off valve and compression fitting.
- Water hardness 3-6 gpg or 50-100 ppm.
- Line pressure 2-8 bar, 28-112PSI
- Water flow rate Minimum 1 GPM
- Filtration < 1.0 micron
- PH 6.5-8.5
- Max working temp 40C/104F
- Min working temp 10C/50F

☐ Power


- Volts: 220 (range of 208-240)
- Watts: 2400
- Amp draw: 17
- Receptacle: Nema L6-20
- Outlet needs to be within 3ft

☐ Dimensions

- Height: 10.47 inches
- Depth: 12.6 inches
- Width: 9.45 inches

☐ Photo

- Please attach a photo of the completed worksite.

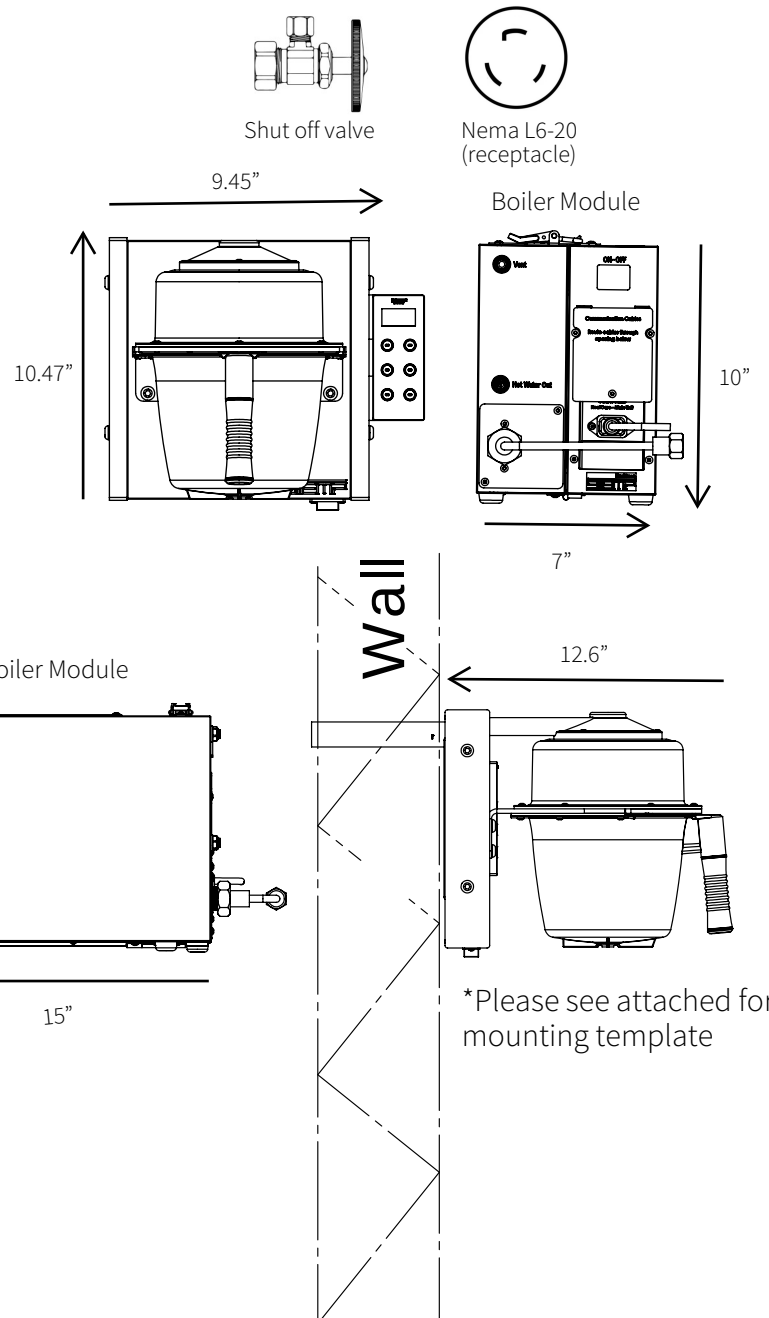


I, the customer, understand that these requirements must be in when the installer arrives. Failure to have the site ready will result in additional service and travel charges, and may cause further delays in installation.

Customer Name: _____ Signature: _____

Company Name: _____

Phone: _____ Email: _____ Sales Order: _____

Mounting

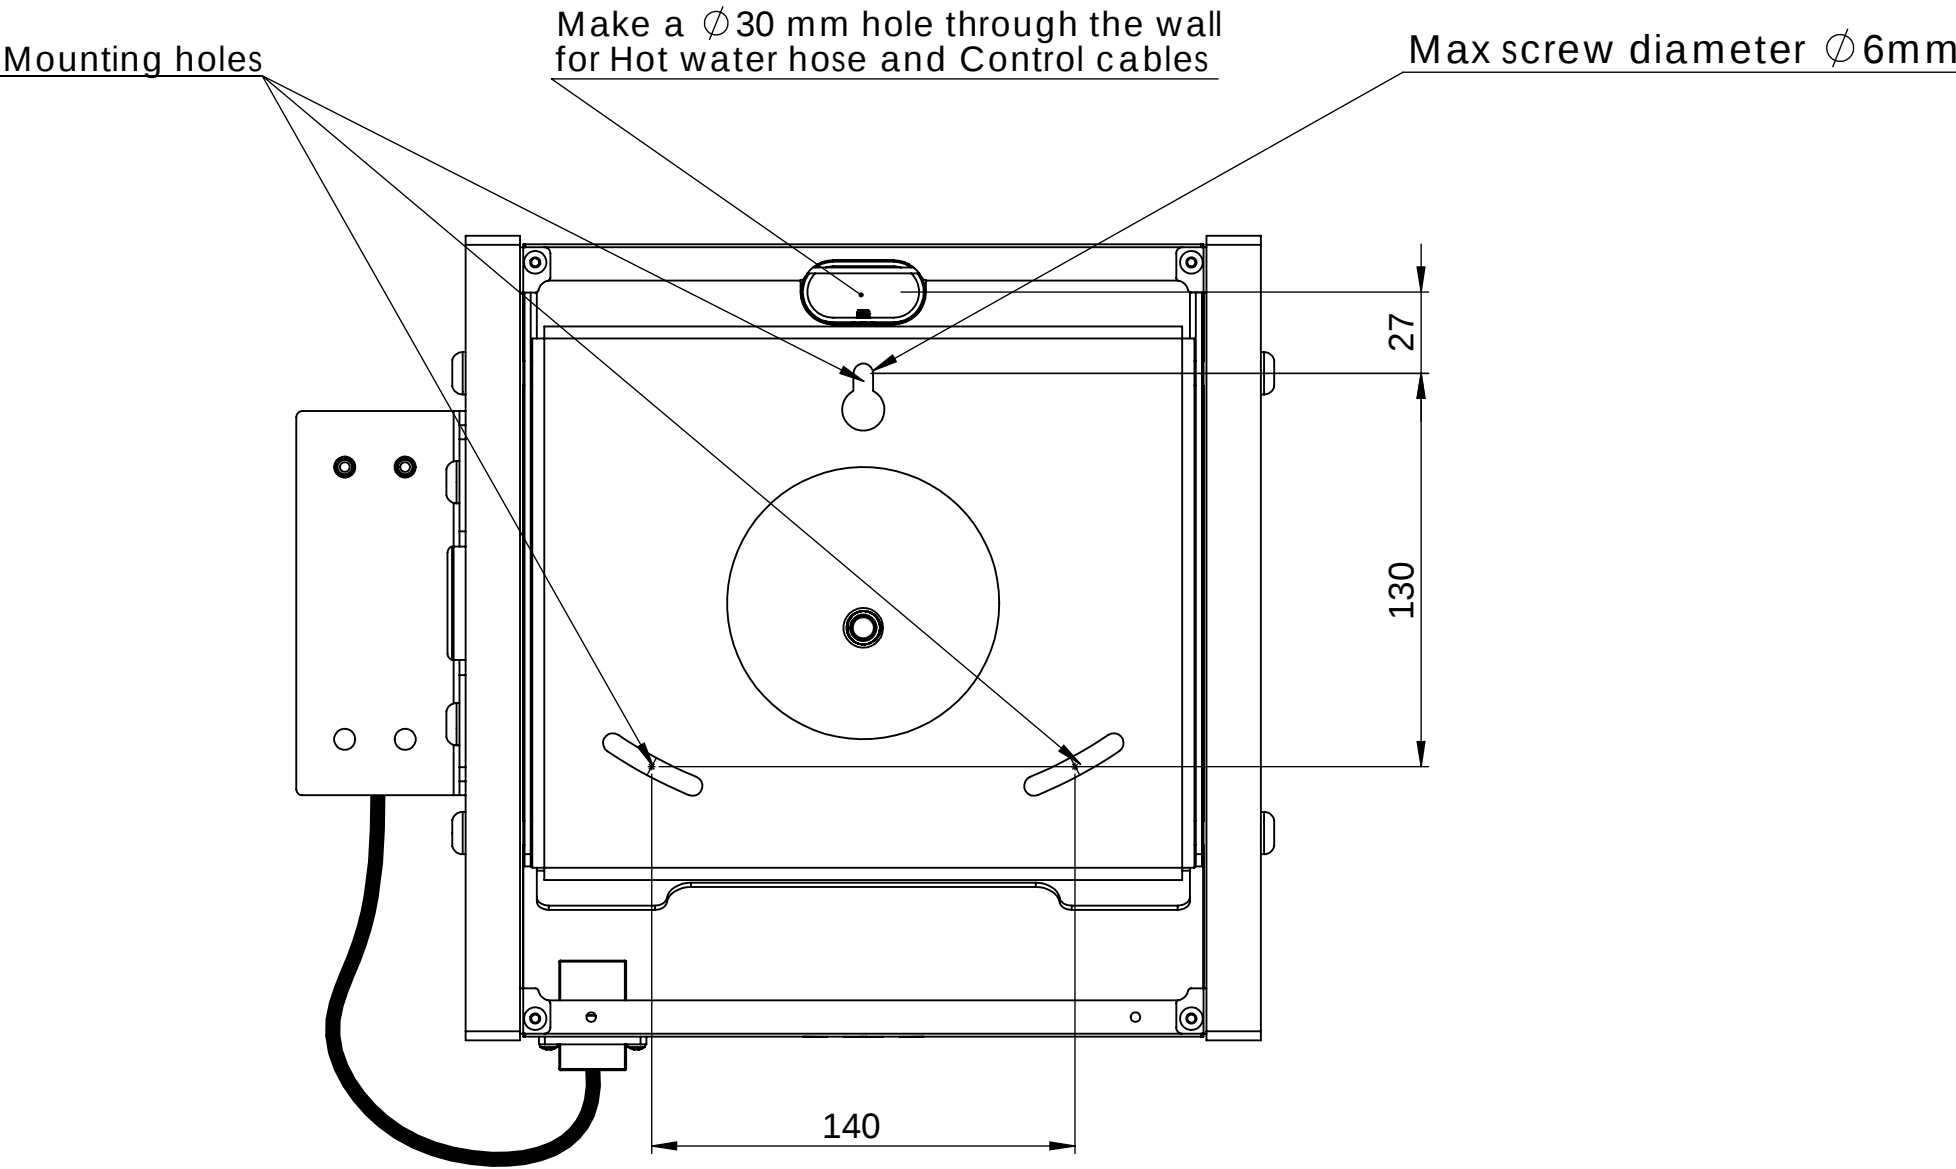

Latest Rev: -02		Description: New Version		Date: 19-11-25	
MATERIAL:				SCALE:1:2.5 DO NOT SCALE DRAWING	
	NAME	SIGNATURE	DATE	TITLE: Hipster UC Wall	
DRAWN	Jarl Nilson		17-06-02		
APPV'D					
Q-A					
				PART NO. 300305-02	
				A3	
				SHEET 3 OF 3	