

Curtis®



Curtis Primo Cappuccino

Introducing Curtis' Next Generation of Primo Cappuccino Machines

Curtis Primo Cappuccino

Rich in design, features and profits, Curtis Cappuccino Machines blend technology with simplicity to deliver delicious drinks cup after cup. Innovative features add convenient and trouble-free operation to these cappuccino dispensers. Designed with smooth, Euro-styled lines and an oversized backlit display each powered drink dispenser inspire impulse sales throughout the day.



Benefits and Features



Precision Programming

Adjust powder flow in 5% increments and water temperature from 80°F to 200°F to create the perfect hot or cold beverage for your operation.

Digital Control & LCD Digital Display

Provides precise control over all critical blending and dispensing functions. Extra bright and easy to see.



Up to 6 Dispensing Points


Up to 6 dispensing stations with pre-dispense or portion control.

Direct Drive Mixing Augers

Ensure smooth high-speed blending of powdered drinks.

High Velocity Whipping Motors

Sloped whipping motors ensure smooth, high-speed blending of powdered drinks.

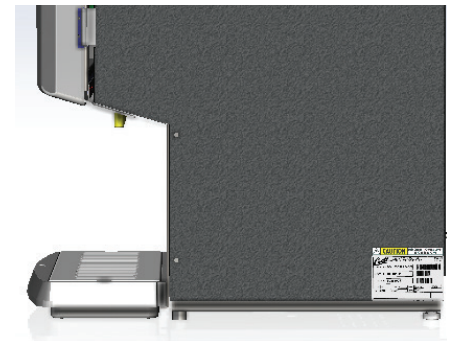

Fixed-Flow Water System

Ensures precise drink blending regardless of irregularities in water pressure/volume.

Digital Temperature Control


Precisely Senses Water Temperature And Level To Maximize Energy Efficiency And Prevent Heating Element Burnout.

Model Configurations



Model #	PCNG 3	PCNG 4	PCNG 5	PCNG 6
Dispensing Stations	3	4	5	6
Hoppers	3	4	5	6
Hopper Capacity	One 5 lb and Two 10 lb Hoppers	Two 5 lb and Two 10 lb Hoppers	Three 5 lb and Two 10 lb Hoppers	Two 3 lb, Three 5 lb and One 10 lb Hopper
Water Tank Volume	5.3 Gal	5.3 Gal	5.3 Gal	5.3 Gal
Dimensions (HxWxD)	36.24 x 14.64 x 23.08	36.24 x 21.23 x 23.08	36.24 x 21.23 x 23.08	36.24 x 21.23 x 23.08
Electrical Requirements	120V, 15Amps	120V, 15Amps	120V, 15Amps	120V, 15Amps
Wattage	1800W	1800W	1800W	1800W
Wire	2W+G	2W+G	2W+G	2W+G
Hertz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Water Connection	1/4" Flare	1/4" Flare	1/4" Flare	1/4" Flare
Water Pressure	20 - 90 PSI	20 - 90 PSI	20 - 90 PSI	20 - 90 PSI
Flow Rate	0.8 oz/sec	0.8 oz/sec	0.8 oz/sec	0.8 oz/sec
Gal/Hr	5.4	5.4	5.4	5.4
Certifications				

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

 WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Wilbur Curtis Company
6913 Acco Street
Montebello, CA 90640
Toll Free Phone: 800-421-6150
Phone: 323-837-2300
Fax: 323-837-2406

The logo for Curtis, featuring the word "Curtis" in a white, cursive script font with a registered trademark symbol (®) at the end. The letters are white and stand out against the blue background.

PERFECTING THE ART OF BREWING SINCE 1941

wilburcurtis.com