

# Refrigeration

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

[www.RefrigerationX.com](http://www.RefrigerationX.com)



Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

## Beer Dispenser

Underbar Equipment  
X-line

**Model : XBD-3SB-N6**



- Does not include  
keg couplers

### FEATURES & BENEFITS

#### Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Stainless steel cabinet construction

SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop is perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. Spacious inside construction with 32" inner height accommodates various sizes of beer kegs. RefrigerationX beer dispenser model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

#### Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

#### Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

#### Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

#### High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

#### 3" diameter stainless steel insulated beer tower

#### Comes standard with a four-way tapper manifold

#### Beer dispenser holds 33°F ~ 38°F for the best in beverage preservation

NATURAL  
Refrigerant

SPEC  
ISO 9001:2008

ETL  
Intertek

ETL  
Intertek

2 YEAR  
WARRANTY

Compressor  
5 YEAR  
WARRANTY  
(U.S.A. only)

| Model             | Swing Doors | 1/2 Barrels | HP         | AMPS       | Crated Weight (lbs.) | L x D x H <sup>†</sup> (inches) |
|-------------------|-------------|-------------|------------|------------|----------------------|---------------------------------|
| <b>XBD-3SB-N6</b> | <b>2</b>    | <b>3</b>    | <b>1/5</b> | <b>2.3</b> | <b>320</b>           | <b>69 x 27 1/4 x 37 1/8</b>     |

## Model : XBD-3SB-N6

| ELECTRICAL DATA            |             |                                                                                              |
|----------------------------|-------------|----------------------------------------------------------------------------------------------|
| Voltage                    |             | 115/60/1                                                                                     |
| Plug Type                  |             |  NEMA 5-15P |
| Full Load Amperes          |             | 2.3                                                                                          |
| Compressor HP              |             | 1/5                                                                                          |
| Refrigerant                |             | R-600a                                                                                       |
| Cord Length (ft.)          |             | 8.5                                                                                          |
| Lamp (W)                   |             | 287.5                                                                                        |
| DIMENSIONAL DATA           |             |                                                                                              |
| Net Capacity               | 1/2 Barrels | 3                                                                                            |
|                            | cu. ft.     | 25.4                                                                                         |
| Ext. Length Overall (in.)  |             | 69 (1754mm)                                                                                  |
| Ext. Depth Overall (in.)*  |             | 27 1/4 (692mm)                                                                               |
| Ext. Height Overall (in.)† |             | 37 1/8 (942mm)                                                                               |
| # of Swing Doors           |             | 2                                                                                            |
| # of Casters               |             |  6EA        |
| Net Weight (lbs.)          |             | 298                                                                                          |
| Gross Weight (lbs.)        |             | 320                                                                                          |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 3/8" for door handles. Depth does not include 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height. Height does not include 16" for draft arm.

- **WARRANTY :** 2 Year Parts and Labor Warranty  
5 Year Compressor Warranty

### STANDARD FEATURES

- Anti-corrosion coated evaporator
- Double faucet beer tower
- Self-contained system
- 2.5" dia. swivel casters with locks on the front set


### OPTIONAL ACCESSORIES

- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 4" caster, 1/2" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Triple faucet draft tower: 153A-3
- ※ Additional purchase of distributor (2 Way) required: P0100D2400


Ver.20250523

## PLAN VIEW


(unit : inch)

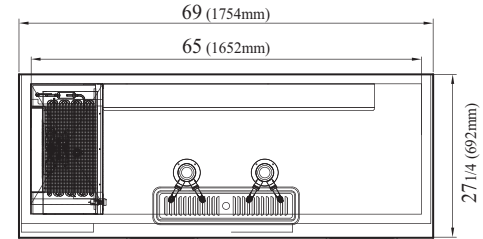

TOP VIEW

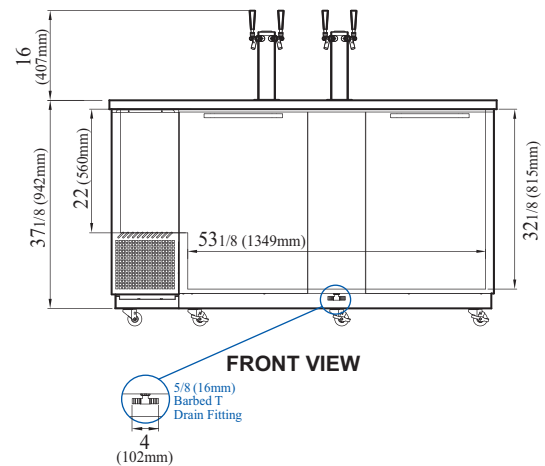

FRONT VIEW

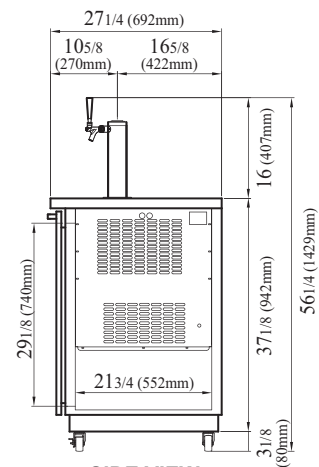

SIDE VIEW



Warranty: 800-381-7770

Warranty@RefrigerationX.com