Delfield

F15-P Serview

Mirrored Self-Contained Refrigerated Display Cases

F5-P Serview MIRRORED

Models

- F15MC48DP — 48" self-contained mirrored back display with refrigerated base



F15MC48DP

Standard Features

- Display exterior sides are made of 18-gauge stainless steel
- High density foam reinforced ABS plastic interior sides with molded shelf supports
- (3) adjustable epoxy coated wire shelves
- On/Off switch for display section lights
- Top mount coil with multiple circulating air throughout the cabinet
- Display section runs off an electronic temperature control
- Environmentally friendly R290 refrigerant

BASE

- Standard heavy duty units have unfinished base ends
- Base top is constructed of 16-gauge stainless steel
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential) polyurethane. Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Refrigerated base fronts constructed of 0.095" thick ABS plastic backed by rigid polyurethane injection molded frames
- Epoxy coated shelf for each door
- Exterior door fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- 14-gauge leg rails that run the entire length of the unit
- 6.12" adjustable full stainless steel legs and bullet feet
- Base interior cabinet is cooled with mullion style coated blower coils
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back and end
- Laminated face, back and end
- Remote refrigeration (units must be hard wired in the field)
- Additional shelves
- 220 volt/50 cycle - inclusion of this option will alter specifications
- Celsius readout for electronic control

Specifications

Top is constructed of 16-gauge stainless steel, with integral front nosing and 90° turn down at rear. Interior sub-top in made of ABS plastic and 2" die foam is laminated between the interior and exterior top.

Refrigerated base interior back and bottom is constructed of a 22-gauge galvanized stainless steel. Exterior sides, bottom and back are made of 22-gauge galvanized steel. Interior sides are made of ABS plastic. The base is injected with 2" of high density environmentally friendly, Kyoto Protocol Complaint, non-ODP, non-GWP polyurethane injection molded frames. The frames are an excellent thermo-break and superior structural material for fastening doors and drawers. Unit is furnished with one epoxy coated shelf for each door. Exterior machine compartment side is constructed with 18-gauge galvanized.

Exterior door fronts are made of 22-gauge stainless steel; and has an interior made of ABS plastic with formed in channels to house the snap-in dart style vinyl magnetic gasket. Each door front is injected with 1.87" of high density polyurethane foam between the exterior and interior. Full length handles bent into stainless steel door design.

Display section exterior sides are made of 18-gauge stainless steel. Exterior display section top constructed of 22-gauge galvanized metal. Interior sides are made of high density foam reinforced .095" thick ABS plastic with molded shelf supports. The interior bottom is constructed with stainless steel for long lasting durability. Display section is fully insulated with high density polyurethane foam between the interior and exterior. Three adjustable epoxy coated wire shelves are provided for the display section. A on/off switch for display section lights is located at the right end of the front facing above the display section doors.

Display case refrigeration system consists of a top mounted coil with multiple fans circulating the air throughout the cabinet utilizing an electronic temperature control. An ABS plastic drip pan is placed below the coil with a clear drain hose for running the condensation to the lower base mechanical section.

Front of the display section is equipped with two sliding and removable self-closing .5" thick argon filled, low-E glass doors with a warm edge spacer. The vertical outside of each door tuck into an extruded channel running vertically up each side. Front nosing to be stainless steel.

Unit is supported with two 14-gauge leg rails that run the entire length of the unit. Leg rails are welded to the bottom side of the unit and are tied together with two 12-gauge braces running front to back. Caster/leg boxes are welded inside the leg rail and 6.12" adjustable tapered legs are mounted as standard with (4) 5/16" bolts.

Self-contained models have a pre-wired condensing unit housed in a machine compartment, standard on right, with an easy removable louver panel for quick access. Machine compartment also is supplied with an 8' cord, plug and electrical junction box.

Base interior cabinet is cooled with mullion style coated blower coil(s) mounted between each door/drawer section for very even air and temperature control. Blower coils encloses refrigeration lines, evaporator coil, expansion valve, electronic temperature control and fans. Interior refrigerated base cabinet and display section to maintain 36°F to 40°F temperatures at 100°F ambient room temperature.

Back has 2" thick panel, construct on 22-gauge stainless steel interior, 2" of high density polyurethane foam and 22-gauge galvanized steel exterior. Interior of back panel has (2) angled glass mirrors.

R290

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Printed in the USA
Phone: 800-733-8948

www.delfield.com
7039BP
05/24

WELBILT
an Ali Group Company

Delfield®

F15-P Serview MIRRORED

F15MC48DP

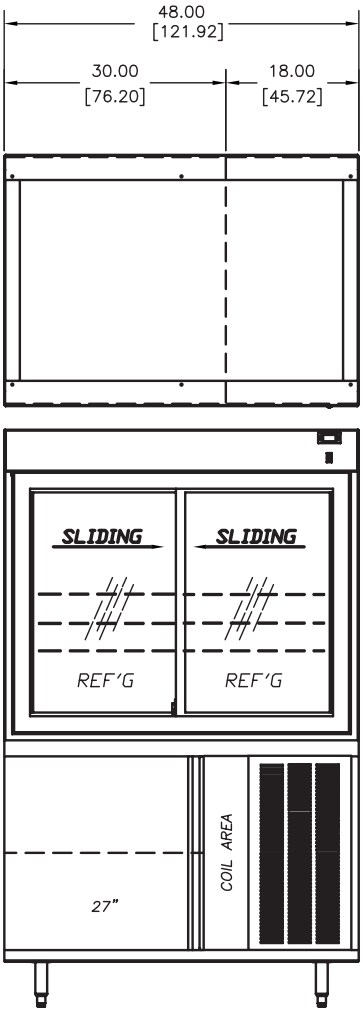

Typical End

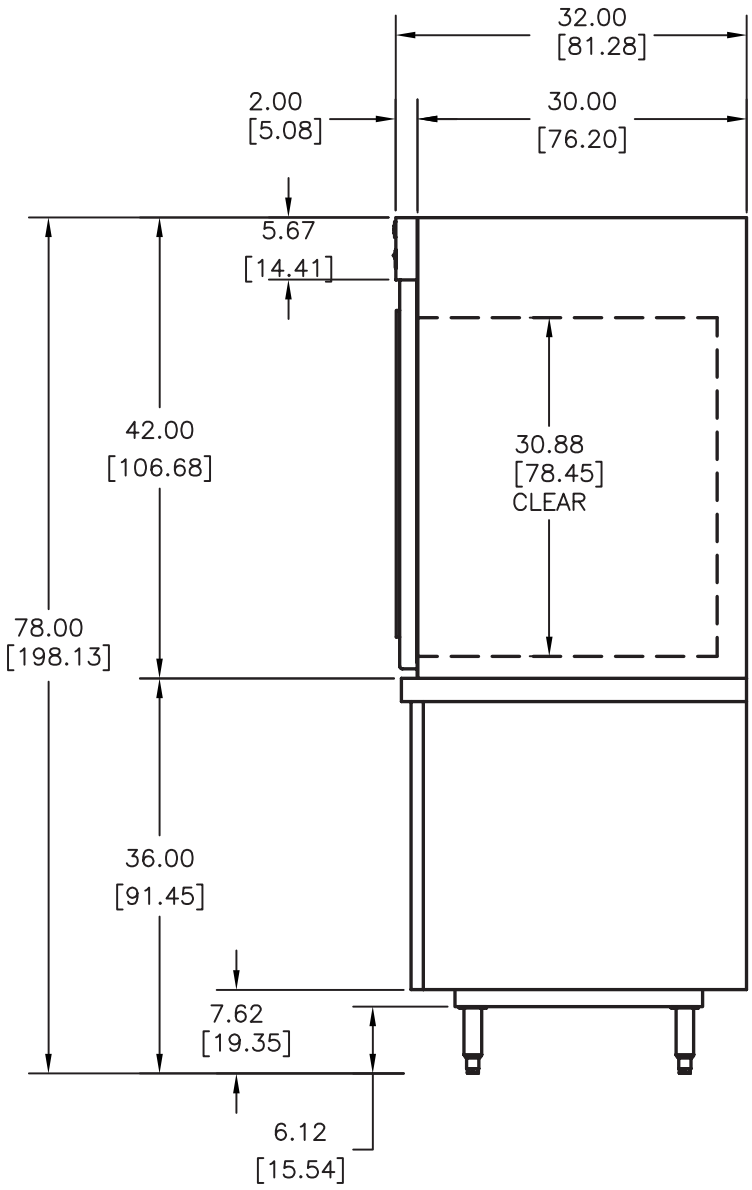

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Printed in the USA
Phone: 800-733-8948

www.delfield.com

7039BP
05/24

WELBILT
an Ali Group Company

Delfield®

F15-P Serview MIRRORED

Mechanical Data Overhead view



SELF CONTAINED



REMOTE

R = REFRIGERATION LINES
D = DRAIN OUTLET
J = JUNCTION BOX
J = CONDENSING UNIT WIRED TO J-BOX, J-BOX WIRED TO ON/OFF SWITCH

Door Swing

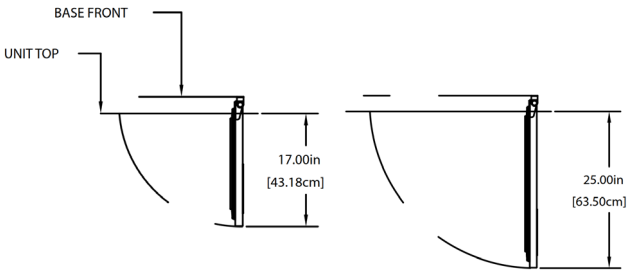

19" 27"

Remote Appearance

INSTALLATION NOTE:
Unobstructed airflow must be maintained to insure unit performance and maintain warranty

Specifications

Model	Shelf Area	Volume	Base Volume	V/Hz/Ph	Amps	H.P.	Nema Plug	Ship Weight LBS/KG	Refrigerant Charge
F15MC48DP	19.6	22.3	9.15	115/60/1	7.9	1/3	5-15P	759lbs/334kg	150g

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Printed in the USA
Phone: 800-733-8948

www.delfield.com
7039BP
05/24

WELBILT an Ali Group Company