

AIR CURTAIN REFRIGERATOR ACR SERIES

Compliant with
NSF/ANSI Standard 2



DXPACR15R



DXPACR15RSD



DXPACR15RCL

Item Numbers
DXPACR15R
DXPACR15L
DXPACR15RSD
DXPACR15LSD
DXPACR15RCL
DXPACR15LCL

Application

The Dinex model ACR15 air curtain refrigerated cabinet offers refrigerated storage and service for a variety of foods. The fully self-contained refrigeration system provides a cold air curtain which allows for extended operation with the front door open while maintaining food temperature and safety for up to two hours.

Liner

The cabinet liner is constructed of stainless steel, welded together and sealed to prevent leakage. It is fitted at the bottom with a drain, leading to a hot gas condensate evaporator with electric backup mounted in the refrigeration compartment.

Exterior

The exterior is constructed of all welded stainless steel. Stainless steel ventilation louvers are mounted on all four sides of the refrigeration compartment. The front louver is removable for service. The cabinet is fully insulated. Stainless steel grip handles are mounted on the rear of the cabinet.

Door

The front door is double panel, constructed of all welded stainless steel and fully insulated. It is mounted to the cabinet with heavy duty stainless steel hinges which allow the door to swing 270°. The door has a full perimeter gasket and a heavy duty pull handle. A heavy duty edge mounted

door latch is provided. Clear door and stainless steel sliding door versions are also available.

Tray Slides

The provided fifteen pairs of tray slides are mounted on two lift-off frames, one for each side. The frames may be easily removed for cleaning. The slides are mounted on 3" centers and incorporate a no-tip feature. The capacity is (15) 18" x 26" sheet pans or (30) 14" x 18" trays.

Refrigeration System

Re-circulating air is chilled as it passes through an evaporator/blower unit. The air then passes through ductwork designed to ensure full coverage of the food and to provide the efficient front air curtain. Cooling of the air is provided by a 1/2 H.P., 120V, single phase, fan cooled condensing unit mounted at the bottom of the cabinet. A microprocessor control monitors the entire system. It includes an LED display which is mounted on the front of the unit. Total amperage, including the condensate evaporator, is 10.1 Amps. The 10' long supply cord is fitted with a NEMA 5-15P plug. The cord exits from the rear of the cabinet and a cord hook is provided. The coolant is environmentally safe type R-290.

Casters

The unit is mounted on four 5" diameter, heavy duty, swivel casters. Includes a set of 4 corner bumpers.

Performance

Pull down time from 80°F ambient to 41°F inside the cabinet in 30 minutes or less. The air screen technology will maintain the food at 41°F with the door open for up to two hours.

Warranty


One year parts and labor.

We do not accept returns on any Dinex equipment or Dinex custom products. Please contact your local Dinex rep to ensure order accuracy prior to ordering.

DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com

AIR CURTAIN REFRIGERATOR ACR SERIES

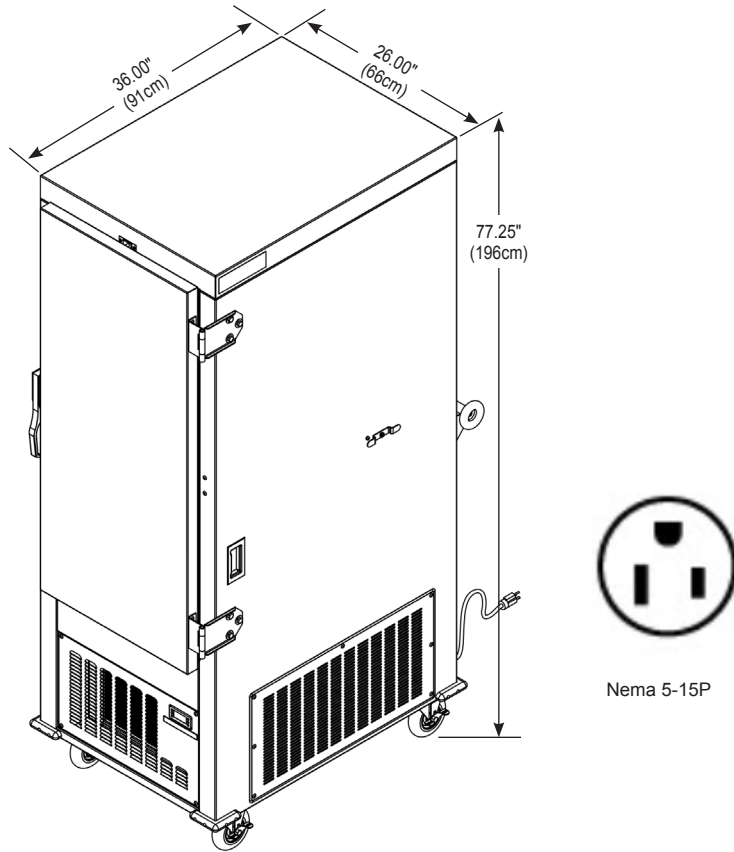

Items and Dimensions

ITEM NUMBER	DOOR HINGE	OVERALL WIDTH	OVERALL DEPTH	OVERALL HEIGHT*	NEMA PLUG	SHIP WEIGHT	SHIP CUBE
DXPACR15R	Right Mount	27.875" (70.8cm)	43" (109.2cm)	77.25" (196cm)	5-15P	525 lbs (238 kg)	10.33
DXPACR15L	Left Mount	27.875" (70.8cm)	43" (109.2cm)	77.25" (196cm)	5-15P	525 lbs (238 kg)	10.33
DXPACR15RCL	Right Mount	27.875" (70.8cm)	43" (109.2cm)	77.25" (196cm)	5-15P	525 lbs (238 kg)	10.33
DXPACR15LCL	Left Mount	27.875" (70.8cm)	43" (109.2cm)	77.25" (196cm)	5-15P	525 lbs (238 kg)	10.33
DXPACR15RSD	Right Mount	31.25" (79.4cm)	43.125" (109.5cm)	77.25" (196cm)	5-15P	550 lb (249.5 kg)	10.33
DXPACR15LSD	Left Mount	31.25" (79.4cm)	43.125" (109.5cm)	77.25" (196cm)	5-15P	550 lb (249.5 kg)	10.33

* Height includes casters

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

