

Project: _____
 Model #: _____
 Item #: _____ Qty: _____
 Approval: _____

460 Southport Commerce Blvd.
 Spartanburg SC 29306
 Phone: 864-574-6004
 Toll Free: 1-888-532-2816
 sales@ojedausainc.com
 service@ojedausainc.com
 www.ojedausa.com



REFRIGERATED SELF-CONTAINED ISLAND IRMH-60-3-B-H



R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

120 VOLT SYSTEM

All Alfa models feature a 110/120 Volt system standard, ensuring hassle-free plug and play for our customers.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING SHELVES

LED provides long lasting energy efficient lighting with minimal heat output.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Custom Graphics
 Available Upon Request

Dimensions			Levels	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
60.9"	40.7"	63.7"	3	2x3/4	120	5-20P	18	624 lbs	
1547 mm	1034 mm	1618 mm	Energy Consumption: 34.5 kWh/24 h						

*Inches rounded up one decimal place. *Specifics may change without notification.

REFRIGERATED SELF-CONTAINED ISLAND

IRMH-60-3-B-H

CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.
- Adjustable leg levels.

SHELVING

- 3 product levels with 2 shelves per level.
- Fixed price tag molding.

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be disrupted. This includes placement near any HVAC vent, open doorway, fan or areas with direct sunlight.

ELECTRICAL

- 110/120 standard volt system.



LIGHTING

- LED lighted shelves.


REFRIGERATION

- R-290 refrigerant.
- Dual refrigeration system.
- Hot gas heated condensation pan.
- Electronic temperature control.
- Automatic defrost cycle.


ACCESSORIES

- 3" or 5" casters.
- Custom graphics available.

SHELF DIMENSIONAL DRAWING

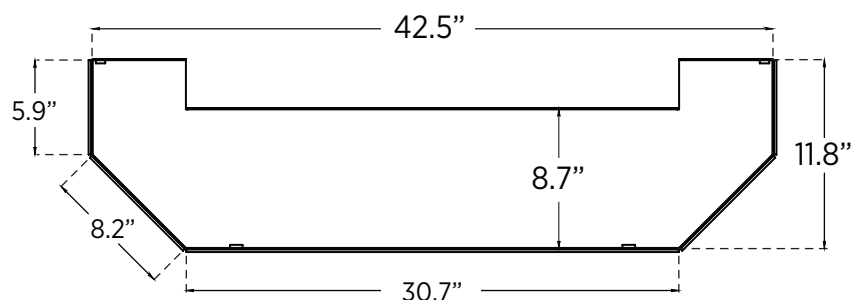

DIMENSIONAL DRAWING

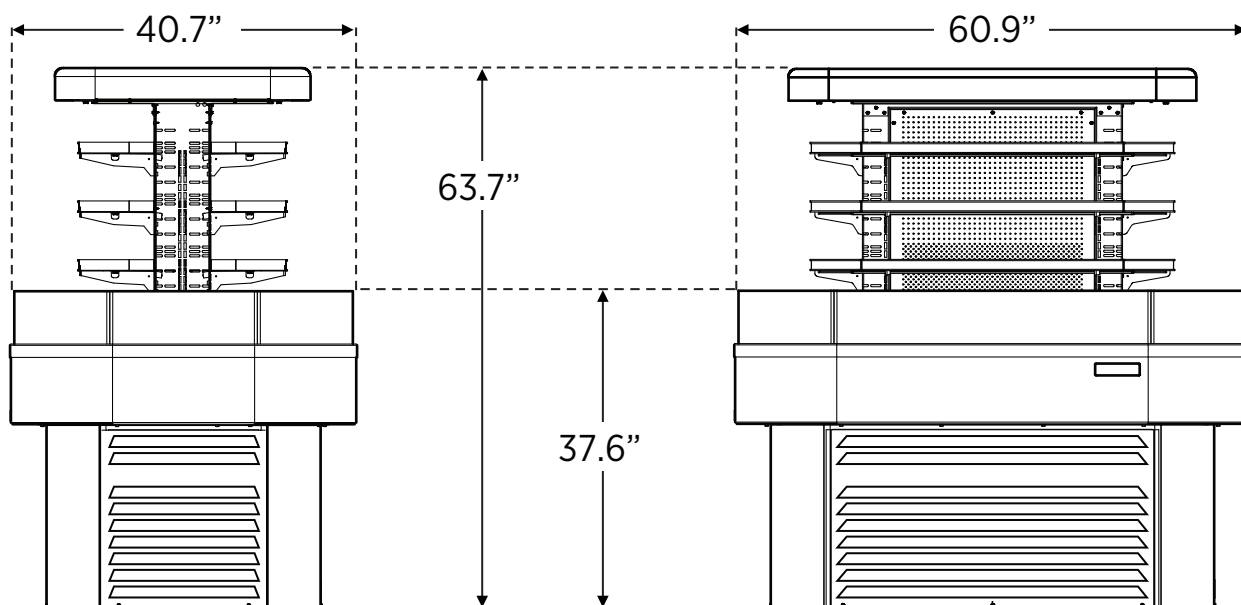

*Inches rounded up one decimal place. *Specifics may change without notification.



www.ojedausa.com