



PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____

DIRECT DRAW

Direct Draw Dispenser / Shallow Depth

VDDN48HC-S



EXCLUSIVE WARRANTY

- ▶ 7 Year Parts, Labor and Compressor
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



CABINET CONSTRUCTION

- Stainless steel exterior
- Top is made from heavy-duty stainless steel including drip tray
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- One (1) tower with dual faucets
- 3-in-1 Draft Solutions dispense beer, wine, or coffee (other non-alcoholic beverages) with the same tap-no line/manifold changes needed
- 3" Stainless steel insulated dispensing tower
- Drain hose located at the rear on compressor side for connection to floor drain
- Door locks
- Magnetic gaskets provide positive door seal
- 8' Cord And Plug (see electrical data for details)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Side Mounted Refrigeration System For Serviceability
- Automatic, non-electric defrost
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

FEATURES

- Full Electronic Control
- Vertical Door Handles
- Self-Closing Doors With 120° Stay-Open Feature For Easy Product Loading
- Led Lighting

OPTIONS & ACCESSORIES

- | | | |
|---|---|---|
| • Right side compressor location (-ALT) (specify at time of unit order) | • Shelves | • 1 - 6 Tap tower |
| • Stainless steel interior lining | • Shelf clips | • 2, 3 & 4 way manifolds |
| • Stainless steel back | • Wine & coffee models | • Dual tap placement option |
| • Glass door | • Custom tower hole location | • No draft/hole cover option |
| | • Drip tray location option | • Remote option* (see note on back on page) |
| | • Faucet locks | |
| | • Glass rinser | |
| | • Right or left hinged door | |
| | • Leveling feet | |
| | • 3" Casters, 6" Casters or 6" Black legs | |

3779 Champion Blvd, Winston-Salem, NC 27105




ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 11/25 Printed in U.S.A.

APPROVAL: _____ DATE: _____


KEG CAPACITY



ELEVATION VIEW

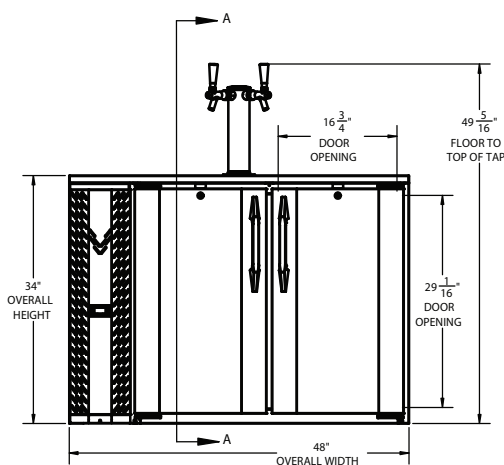


SIDE VIEW

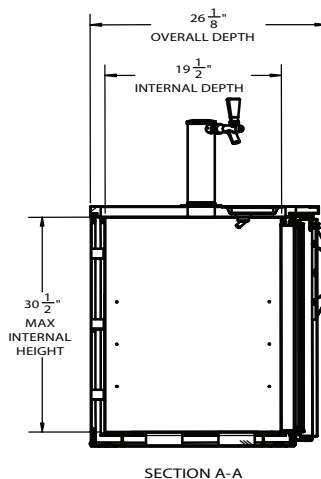

SECTION A-A

PLAN VIEW

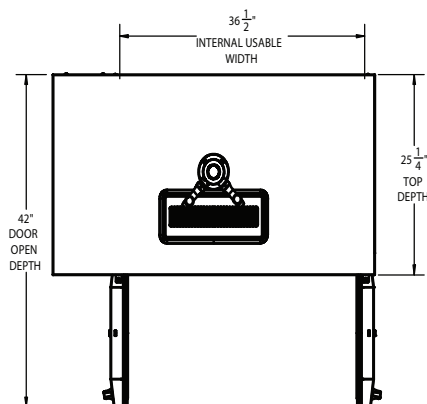

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	12.56	Cabinet Voltage	115/60/1	Height	42 3/16"
External Width, Overall (in.)	48"	Total Amperes	3	Width	50 3/4"
External Depth, Overall (with handle)	26 1/8"	NEMA Plug (8' cord)	5-15P	Depth	36 1/2"
External Height Overall (with casters)	49 5/16"	REFRIGERATION DATA		Crated Weight	291 lbs.
Depth, Door Open 90°	42"	Condensing Unit Size, HP	1/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order. 0" Clearance is Required	
Door Openings (in.)	16 3/4" x 29 1/16"	Refrigerant*	R-290		
No. Of Doors	2	Capacity (BTU/HR) (100°F/20°F)	1702		
Internal Width Usable (in.)	36 1/2"	Heat Rejection (BTU/HR)	2553		
Internal Depth Overall (in.)	19 1/2"	Charge (lbs/grams/ounces)	0.1212 / 55 / 1.94		
Internal Height Overall (in.)	30 1/2"				
Number of 1/2 Kegs	2				

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 11/25 Printed in U.S.A.



Please Verify Qualifying Units By Visiting:
www.energystar.gov/cfs