


Condensation Hood

Project _____
 Item _____
 Quantity _____
 FCSI section _____
 Approval _____
 Date _____

Model

mini pro CH FE



Key features

- For mini pro 6.06/6.10/10.10
- Available in stainless steel and in black
- Front extraction, direct extraction when the door is opened
- Automatic control via the mini pro combi oven
- Energy-efficient thanks to innovative standby mode during the cooking sequence
- Low noise level with high efficiency
- Easy to service, even the heat exchanger can be replaced
- Grease filter can be removed from the front without tools
- Easy cleaning
- 2 speeds: low & high
- Height only 10"
- Can be retrofitted at any time
- Power is supplied via combi oven, no on-site mains connection required
- Can also be used with stacking kit
- No drain connection required, condensate is drained via mini pro combi oven

Dimensions and weights

Part number	3437035 (silver) 3437037 (black)
For combi ovens of size	mini pro 6.06
Dimensions	
Width x Depth x Height	19.8 x 27.1 x 9.6"
Dimensions with packaging	
Width x Depth x Height	25 x 34.8 x 17.8"
Weights	
Net weight	56 lbs
Weight including packaging	67 lbs

Part number	3437036 (silver) 3437038 (black)
For combi ovens of size	mini pro 6.10/10.10
Dimensions	
Width x Depth x Height	19.8 x 34.1 x 9.6"
Dimensions with packaging	
Width x Depth x Height	25 x 34.8 x 17.8"
Weights	
Net weight	63 lbs
Weight including packaging	74 lbs

Electrical supply

Electrical supply*	
Rated voltage	208/240V 1PH 60 Hz
Rated power consumption	215 W
Rated current	0.7-0.8 A

* Power supply and fuse protection integrated via combi oven

Notice: Installation of control and power connection to oven needed.

Accessories

Assembly set for stacking kit	Part number 3437215
-------------------------------	---------------------



Safety clearances for installation*

Left-hand side	2"
Right side	2"
Top*	20"

* Depends on type of air ventilation system and nature of ceiling.

Air flow rate

Reduced speed	262 cfm
Full speed	471 cfm

Noise emission


Reduced speed	57 db
Full speed	max. 70 db

Marking / Certificates


Approval mark	cURus, NSF2
---------------	-------------

Side view


Size 6.06



Size 6.10/10.10

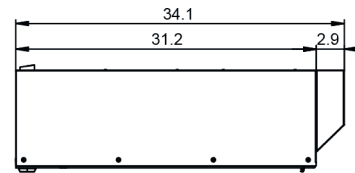

Front view



Please note:

- This document is to serve planning purposes only.
- Please refer to the mini pro CH FE operating and installation instructions for further technical data and guidance on installation and positioning.
- Local standards and regulations for ventilation systems must be adhered to.

9737410_00 ENG_USA 04/25, © 2025 Welbilt. Please note that the product is being continuously improved and that, as a result, these specifications are subject to change without notice.