



PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

## Back Bar Refrigerator / Glass Doors

**VBB72HC-G-B**



### EXCLUSIVE WARRANTY

- ▶ 7 Year Parts, Labor and Compressor
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



BACK BAR REFRIGERATOR

### CABINET CONSTRUCTION

- Exterior Features Durable Black Painted Steel
- Interior Construction Utilizes Galvanized Steel On Walls And Ceiling, Heavy Duty Stainless Steel Floor
- Full Electronic Control
- 1" Stainless Steel Top Standard
- ADA Compliance (standard height)
- Self-Closing Doors With 120° Stay-Open Feature
- Door Locks
- Magnetic Door Gaskets Provide Positive Door Sealing
- Compressor Standard On Left Side
- Balanced, Forced Air Refrigeration System Provides Rapid Chilling Of Product
- 8' Cord And Plug (see electrical data for details)

### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

### FEATURES

- Vertical Door Handles
- Six (6) Epoxy Coated Shelves
- LED Lighting
- Packaged Products Only



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

### OPTIONS & ACCESSORIES

- Stainless Steel Back
- Additional Shelves
- Right side compressor location (-ALT) (specify at time of unit order)
- Wine Model (40°-60° models)
- Additional Shelf Clips
- Remote Models\*  
(refrigerant must be specified at time of order, see note on back on page)
- Wire Shelf Divider
- 3" Casters, 6" Casters, Or 6" Black Legs

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 11/25 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_


#### HEIGHT OPTIONS

| OPTIONS              | HEIGHT |
|----------------------|--------|
| Standard Floor Mount | 34"    |
| 3" Casters           | 37"    |
| 6" Casters           | 40"    |


#### SIDE VIEW



#### ELEVATION VIEW

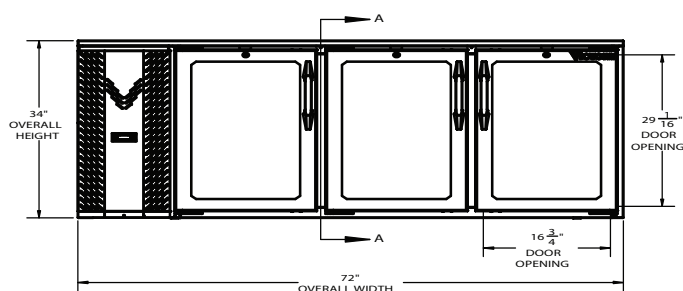

#### PLAN VIEW

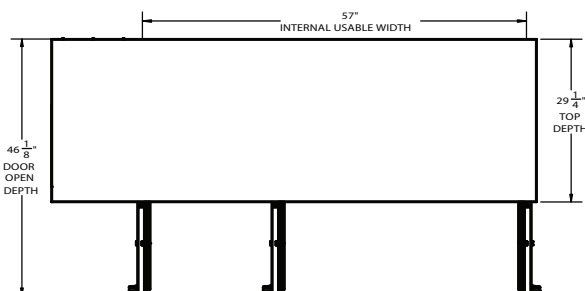

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

| CHARACTERISTICS                        |                    | ELECTRICAL DATA                |                     | SHIPPING DETAILS                                                                                                                           |          |
|----------------------------------------|--------------------|--------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Net Capacity (cubic ft.)               | 23.643             | Cabinet Voltage                | 115/60/1            | Height                                                                                                                                     | 42 3/16" |
| External Width, Overall (in.)          | 72"                | Total Amperes                  | 3.3                 | Width                                                                                                                                      | 74 3/4"  |
| External Depth, Overall (with handle)  | 29 11/16"          | NEMA Plug (8' cord)            | 5-15P               | Depth                                                                                                                                      | 36 1/2"  |
| External Height Overall (with casters) | 34"                | <b>REFRIGERATION DATA</b>      |                     | Crated Weight                                                                                                                              | 391 lbs  |
| Depth, Door Open 90°                   | 46 1/8"            | Condensing Unit Size, HP       | 1/3                 | *NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.<br><br>0" Clearance is Required |          |
| Door Openings (in.)                    | 16 3/4" x 29 1/16" | Refrigerant*                   | R-290               |                                                                                                                                            |          |
| No. Of Doors/Shelves                   | 3 / 6              | Capacity (BTU/HR) (100°F/20°F) | 1942                |                                                                                                                                            |          |
| Internal Width Usable (in.)            | 57"                | Heat Rejection (BTU/HR)        | 2913                |                                                                                                                                            |          |
| Internal Depth Overall (in.)           | 23 1/2"            | Charge (lbs/grams/ounces)      | 0.2535 / 115 / 4.05 |                                                                                                                                            |          |
| Internal Height Overall (in.)          | 30 1/2"            |                                |                     |                                                                                                                                            |          |
| Number of 1/2 Kegs                     | 3                  |                                |                     |                                                                                                                                            |          |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 11/25 Printed in U.S.A.