



PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____

Back Bar Refrigerator / Shallow Depth / Sliding Glass Doors / Pass-Thru

VBBN48HC-GS-PT-B



EXCLUSIVE WARRANTY

- ▶ 7 Year Parts, Labor and Compressor
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



BACK BAR REFRIGERATOR

CABINET CONSTRUCTION

- Exterior Features Durable Black Painted Steel
- Interior Construction Utilizes Galvanized Steel On Walls And Ceiling, Heavy Duty Stainless Steel Floor
- Full Electronic Control
- 1" Stainless Steel Top Standard
- ADA Compliance (standard height)
- Self-Closing Sliding Glass Doors Have Black Frame Regardless Of Finish
- Door Gaskets Provide Positive Door Sealing
- Stay-Open Feature And Locks Standard
- Compressor Standard On Left Side
- Balanced, Forced Air Refrigeration System Provides Rapid Chilling Of Product
- 8' Cord And Plug (see electrical data for details)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

FEATURES

- Vertical Door Handles
- Four (4) Epoxy Coated Shelves
- LED Lighting
- Packaged Products Only



Please Verify Qualifying Units By Visiting:
www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Stainless Steel Back
- Additional Shelves
- Wine Model (40°-60° models)
- Additional Shelf Clips
- Wire Shelf Divider
- 3" Casters, 6" Casters, Or 6" Black Legs
- Right Side Compressor Location (-ALT) (specify at time of unit order) (refrigerant must be specified at time of order, see note on back on page)
- Remote Models*

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 11/25 Printed in U.S.A.

APPROVAL: _____ DATE: _____



BACK BAR REFRIGERATOR


VBBN48HC-GS-PT-B




HEIGHT OPTIONS

OPTIONS	HEIGHT
Standard Floor Mount	34"
3" Casters	37"
6" Casters	40"

ELEVATION VIEW

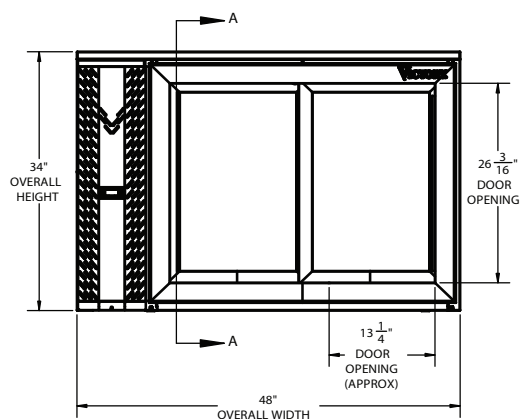


SIDE VIEW

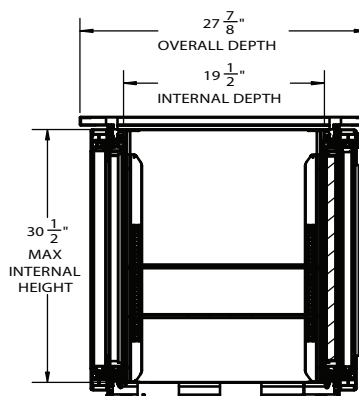

SECTION A-A

PLAN VIEW

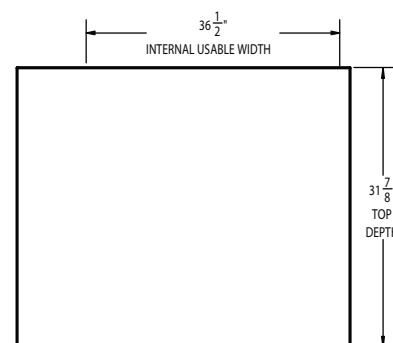

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	12.56	Cabinet Voltage	115/60/1	Height	42 3/16"
External Width, Overall (in.)	48"	Total Amperes	3	Width	50 3/4"
External Depth, Overall (with handle)	27 7/8"	NEMA Plug (8' cord)	5-15P	Depth	36 1/2"
External Height Overall (with casters)	34"	REFRIGERATION DATA		Crated Weight	345 lbs
Door Openings (in.)	13 1/4" x 26 3/16"			*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order. 0" Clearance is Required	
No. Of Doors/Shelves	4 / 4	Condensing Unit Size, HP	1/4		
Internal Width Usable (in.)	36 1/2"	Refrigerant*	R-290		
Internal Depth Overall (in.)	19 1/2"	Capacity (BTU/HR) (100°F/20°F)	1702		
Internal Height Overall (in.)	30 1/2"	Heat Rejection (BTU/HR)	2553		
Number of 1/2 Kegs	2	Charge (lbs/grams/ounces)	0.1212 / 55 / 1.94		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 11/25 Printed in U.S.A.

