

Side-Mount Refrigerated Tables

SIDE-MOUNT REFRIGERATED TABLES WITH DOORS



BUILT TO PERFORM, DESIGNED TO DELIVER

The Asber ASUR Series delivers exceptional performance, flexibility, and efficiency in a compact design. Designed for versatile use as either undercounter or worktop units, side-mounted refrigeration system maximizes storage space while keeping cold air away from heat zones for superior performance. Featuring an improved airflow and easier maintenance access to reduce downtime and boost kitchen efficiency. Built with a full stainless-steel exterior and interior, it ensures long-lasting durability in high-demand environments.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy-savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Reversible Condensing Fan Motor: Ensuring optimal airflow, reduced maintenance, and improved long-term efficiency.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Temperature range: Maintains 32°F to 38°F in ambient conditions up to 100°F and 65% RH.

DRAWER SYSTEM & STORAGE FLEXIBILITY

Heavy-Duty, Hygienic, and Operator-Friendly

- Field-convertible stainless-steel drawer kits for maximum flexibility.

- All-stainless-steel drawers: Built for durability and ease of use, providing long-lasting performance in busy kitchen environments.
- High-strength slides: Designed for smooth operation and dependable support under heavy use, rated for up to 110 pounds per drawer.
- Flexible configurations: Each drawer accommodates pan sizes from 1/9 to 1/1, up to 6" deep (pans sold separately).
- Fixed pan dividers: ensure stable pan positioning, reducing cross-contamination risk and keeping ingredients perfectly organized for a clean and efficient workflow.

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- Designed for space optimization, fitting seamlessly beneath standard countertops or work surfaces.
- Full-length recessed handles: Provide ergonomic access while maintaining a clean, professional appearance.
- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Standard 5" casters (front with brakes) provide stability, mobility, and easy access for cleaning and maintenance.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- Overshelf.
- Extra shelves.
- 4" Stainless-steel backsplash.



ASUR 46



ASUR 67



ASUR 93

| MODEL | DOORS | SHELVES | CAPACITY | | VOLTS - FREQUENCY | POWER HP | AMP | EXTERIOR DIMENSIONS (in) | | | SHIPPING | |
|---|-------|---------|-----------------|------|-------------------|----------|-----|--------------------------|--------|--------|----------|-----------------|
| | | | ft ³ | Pans | | | | Width | Depth | Height | Lbs | ft ³ |
| SIDE-MOUNT REFRIGERATED TABLES WITH DOORS | | | | | | | | | | | | |
| ASUR 46 | 1 | 2 | 11.6 | 6 | 115V. - 60Hz. | 1/3 | 3.0 | 46-1/4 | 36-1/8 | 57 | 298 | 38.8 |
| ASUR 67 | 2 | 4 | 20.8 | 9 | 115V. - 60Hz. | 1/3 | 3.0 | 67-1/2 | 36-1/8 | 57 | 366 | 45.9 |
| ASUR 93 | 3 | 6 | 30.2 | 12 | 115V. - 60Hz. | 1/3 | 3.0 | 93-3/4 | 36-1/8 | 57 | 617 | 38.8 |

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | HEIGHT INCLUDES 6" CASTERS. | VALID ONLY FOR CONTINENTAL USA & CANADA.

Side-Mount Refrigerated Tables



SIDE-MOUNT REFRIGERATED TABLES WITH DOORS



ASUR 46

ASUR 67

ASUR 93

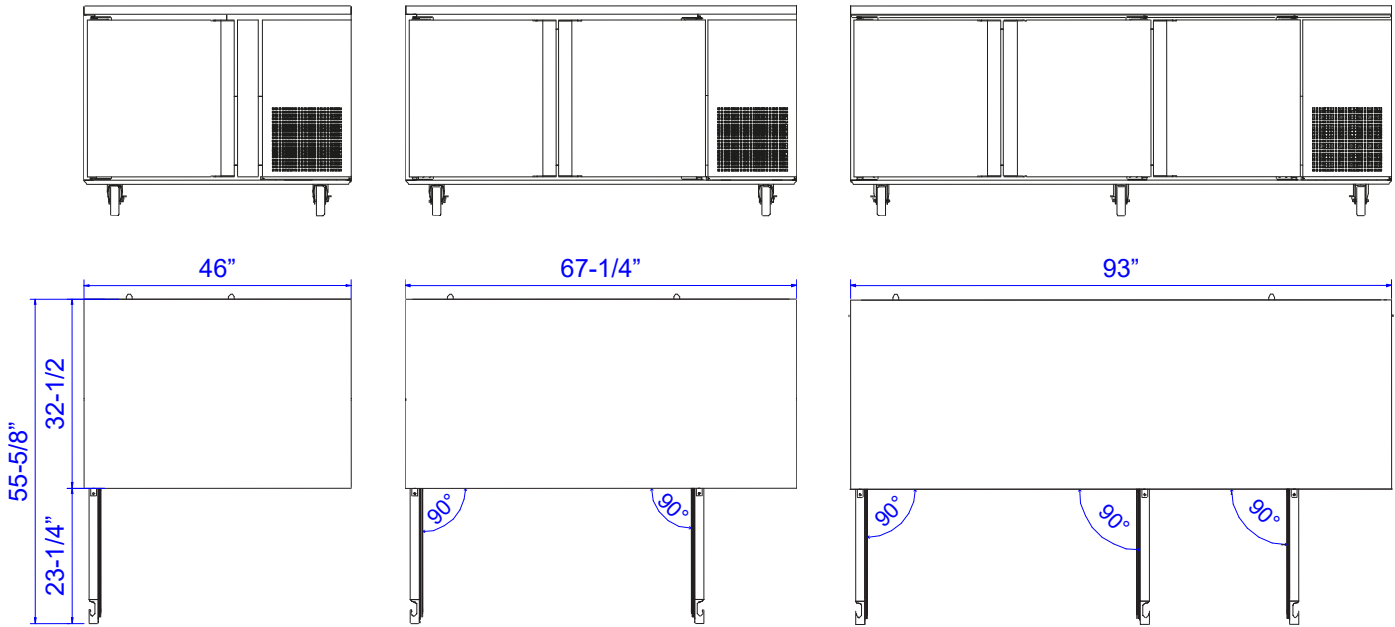

| MODEL | ASUR 46 | ASUR 67 | ASUR 93 |
|---------------------------------|---------------|---------|---------|
| ELECTRICAL DATA | | | |
| Volts - Frequency | 115V. - 60Hz. | | |
| Power (HP) | 1/3 | | |
| Full Amp Load | 3.0 | | |
| Plug Type | NEMA 5-15P | | |
| Refrigerant | R290 | | |
| INTERIOR DIMENSIONS (in) | | | |
| Width | 27-1/8 | 48-3/8 | 74-5/8 |
| Depth | 25-5/8 | | |
| Height | 24-3/4 | | |
| Shelf (in) | 21-1/8 x 26 | | |
| SHIPPING DIMENSIONS (in) | | | |
| Width | 48-7/8 | 70-1/8 | 96-1/8 |
| Depth | 36-1/4 | | |
| Height | 41-3/8 | | |



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | HEIGHT INCLUDES 6" CASTERS. | VALID ONLY FOR CONTINENTAL USA & CANADA.