



Project:

Scan for more info!



Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CP2000-SW-BH

Low Volume Still Chilled Water Only

Artisan Water System

Remote Undercounter Mount



Specifications:

50 12oz drinks per hour @ 45° or less
Self-Contained Refrigeration System
Operating Temperature Range: 40°-100°
Electrical: 120v - 4.2 Amps
Water Bath: 2.5 Gallons
Ice Bank: 6 lbs
11.75" W x 17.5" D x 16.5" H
Weight: 80 lbs



Chilled Water on Tap:

- **Perfect for Office, Hotel Suites, Winery's & Residential**
- **Water dispensing temperatures average between 36-45°**
- **Remote application with built in cold water re-circ for installation up to 6' in distance**
- **Bulkhead fittings for easy hookup to faucet. Extra fittings and water regulator supplied with unit**

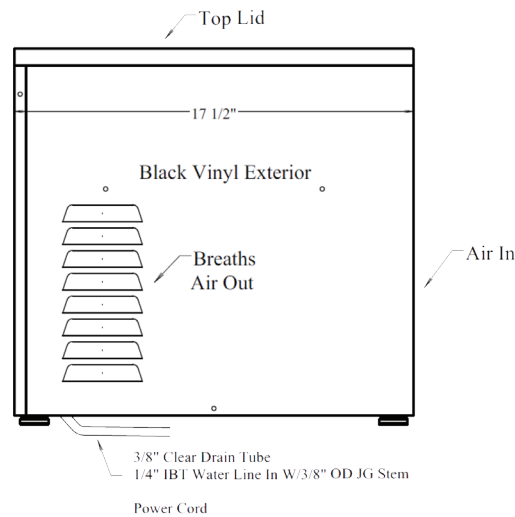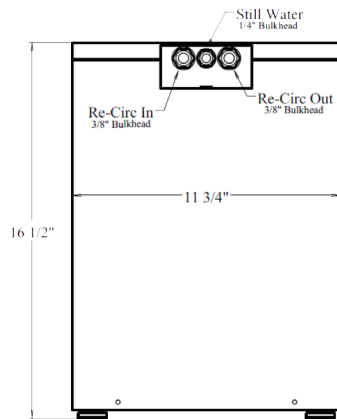

- 11.75" Wide x 17.5" Deep x 16.5" High
- Allow for 6" rear & side clearance around unit for air flow
- Shipping Weight: 80 lbs
- 3/8" water connection
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v
- 7' Overflow Drain Hose, clear

Required Accessories Checklist:



☐ CR-3741

Primary High Pressure
CO2 Regulator for
CO2 tank



☐ CR-Kit-CPUC

Kit includes fittings needed to complete the
installation of CR-14FC filter system to
Remote Chiller CP2000 and Tower or Faucet
CP2000 Series Only



☐ CR-14FCP with Prefilter

☐ CR-14FC without Prefilter

Single Filter System with Compact
Fibredyne filters, 3/4" inlet & outlet.
19" High x 17" Wide 5 gpm, 30,000 gal,
TOC & 1/2 micron filtration



☐ CR-LD38JG

Inline Leak detector, and audio alarm
and Auto-water shut off device.
For use with CP2000 series systems



☐ CBR-V1C

☐ CBR-V1WHT

Single Valve, Single Product
One SSQ Adjustable flow
faucet

☐ Customer supplied CO2 Tank required



ETL Sanitation Listed

Intertek

