

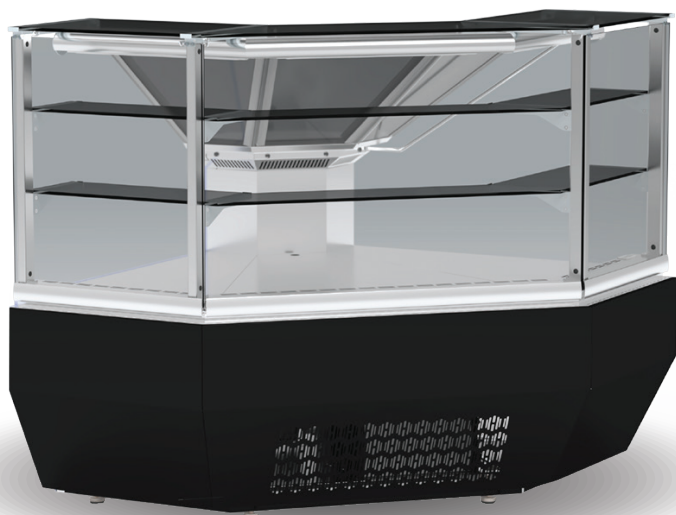


KFM Refrigerated Corner



MODEL
KFM-GG-90-S CORNER

Configurations



Features

- Built in AISI 304 stainless steel
- Display area in AISI 304 stainless steel
- Exterior decoration in skin plate
- AISI 304 stainless steel worktop
- Polyurethane injected sides
- Multi-plexible
- Ventilated refrigeration
- Sliding rear doors
- LED lighting
- Digital thermometer
- Front glass anti-condensation system
- Electronic temperature controller
- Programmable automatic defrosting
- Electric evaporation of defrost water
- Tilting front glass
- Tempered glasses
- Adjustable stainless steel feet



Options

- Quartz worktop
- Display area in painted plate (RAL)
- Exterior decoration in painted plate (RAL)
- Treated evaporator
- Exterior decoration in AISI 304 stainless steel
- Supplementary shelves level without lighting
- Joining kit
- Adjustable stainless steel high feet
- Voltage 115 V~60 Hz / 120 V~60 Hz / 220 V~60 Hz



MODEL NUMBER	KFM-GG-90-S CORNER
Operating temperature	32/39,2 °F
Refrigerant (ref/GWP)	R452A/2140
Defrost	Time based
External dimensions (LxDxH) (inches)	68,7x48,1x33,5
TDA - Total display area (ft2)	14,45
Refrigerated shelf area (ft2)	10,5
Insulation	PUR/H2O
Nominal power (W)	1061
Electric current (A)	11,05
NEMA plug	5-15P

KFM-GG-90-S CORNER

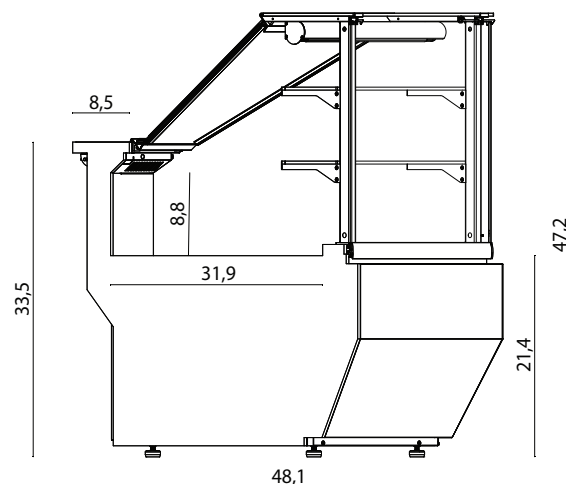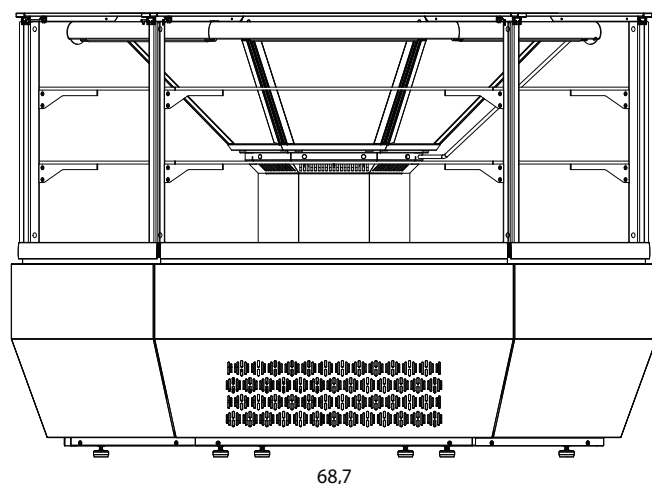

* Pictures and colors are not contractual. The information presented here refers to the standard equipment SELF-CONTAINED version. For additional information about remote or neutral units, contact MVP Group.