

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



### KEY FEATURES




- **Eco-Friendly Refrigerant**  
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.



- **High Power Reliable Refrigeration System**  
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.



- **Newly Designed Condenser**  
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



- **Standard LED Lighting System**  
Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



- **Spark-Free Refrigeration Components**  
All Reach-In models will have spark free refrigeration components for optimal safety, per UL requirements.



- **Evaporator Housing**  
Injection molded, flame retardant plastic evaporator housing provides optimal air flow and reliable condensate drainage during defrost cycles. Optimal improved aesthetics and improved design for accessibility during maintenance & assembly.





- **Insight Health Lock**  
NAMA certified health lock system, with integrated Bluetooth communication: APP allows operators to lock

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

### PRODUCT VIEWS

#### TOP VIEW

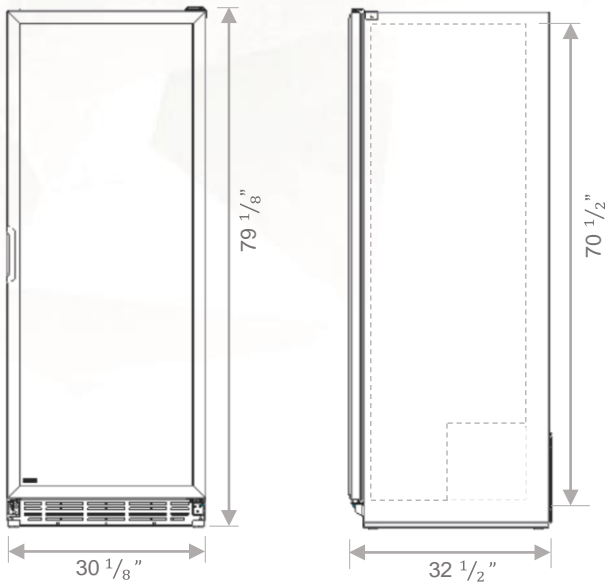

### ADDITIONAL FEATURES



> Manual Lock – External lock available



> Gravity kit – Display technology beverage Visi-Slide.



> Casters and legs available



> Price Kit – Available for shelf display

Customer service and warranty  
 Three year limited warranty, includes parts and labor.  
 An additional two year warranty is issued on the compressor (USA & Canada only).  
 Operators must follow installation and operational guidelines per Imbera Users Manual.  
 Each cooler must be connected directly to a single power supply, otherwise warranty will be voided.  
 Customer service: 866.548.5770

### TECHNICAL SPECIFICATIONS

#### Exterior Dimensions

H:	79 1/8"	201 cm
W:	30 1/8"	77 cm
D:	32 1/2"	82 cm

#### Interior Dimensions

H:	70 1/2"	179 cm
W:	26 5/8"	68 cm
D:	28"	71 cm

#### Usable Interior Capacity

H:	62 7/8"	160 cm
W:	26"	66 cm
D:	23 1/2"	59 cm

#### Usable Volume

26 ft<sup>3</sup>  
 736.24 lts.

#### Doors

1

#### Door construction

Plastic frame

#### Shelves

6

#### Shelves Size

W: 25 7/8" 63 cm  
 D: 23 5/8" 60 cm

**External Material** Pre-painted steel

**Internal Material** Pre-painted steel

### REFRIGERATION PERFORMANCE DATA

#### Refrigerant

R290 2.3 Oz (0.065 kg)

#### Energy Consumption

2.450 kWh/24h

#### Compressor Power

1/3 HP

#### Condenser

Finless (low maintenance)

#### Thermostat setting default

**Cut-Out**  
 32°F (0°C)

**Cut-In**  
 44.6°F (7°C)

### ELECTRICAL DATA

#### Power supply

115V/60 Hz

#### AMPS

4.3 A

#### Lighting

253.4 Lux Output  
 3 modules  
 29 LED per module

#### Plug Type

NEMA 5-15P

#### Controller

WELLINGTON

#### Cord length

128" (327 cm)

### LOGISTIC DATA

#### Trailer Loads

53': 36  
 40': 26  
 20': 12

#### Unit weight with packaging

358.58 lb. 162.65 Kg.  
 without packaging  
 338.85 lb. 153.70 Kg.

#### Dimensions w/packaging

H: 82 7/8" 211 cm  
 W: 33 1/2" 85 cm  
 D: 35 7/8" 91 cm

\*Energy consumption based on ANSI/ASHRAE Standard 72-2005

\*BMAD System (Low maintenance high performance)

\*Dimensions rounded up to the nearest inch or centimeter

\*Specifications subject to change without notice

\*H: Height, W: Width, D: Depth

23/05/2024