



G319 HC BW

VERTICAL COOLER

ESTABLISHING A NEW STANDARD IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES



- **Eco-Friendly Refrigerant**
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.



- **Electronic Temperature Controller**
Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



- **High Power Reliable Refrigeration System**
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.



- **Newly Designed Condenser**
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



- **Standard LED Lighting System**
Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.





- **Spark-Free Refrigeration Components**
All Reach-In models will have spark free refrigeration components for optimal safety, per UL requirements.



ESTABLISHING A NEW STANDARD IN THE FOODSERVICE INDUSTRY.

PRODUCT VIEWS

TOP VIEW

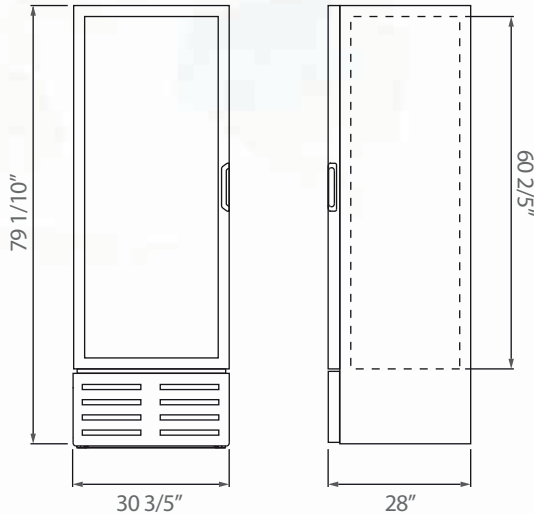

ADDITIONAL FEATURES



> Gravity, sandwich trays and extra shelves available with this model



> Casters and legs available

TECHNICAL SPECIFICATIONS

Exterior Dimensions

H:	79 1/10"	201 cm
W:	30 3/5"	78 cm
D:	28"	71 cm

Interior Dimensions

H:	60 2/5"	154 cm
W:	25 1/2"	65 cm
D:	21 7/10"	55 cm

Usable Interior Capacity

H:	52 9/10"	134 cm
W:	24 3/10"	62 cm
D:	19 1/10"	48 cm

Usable Volume

14.18 ft ³
401.7 lts

Doors	Door construction	Shelves	Shelves Size
1	Plastic frame	5	W: 24 4/5" 63 cm D: 19 3/5" 50 cm

External Material Pre-painted steel

Internal Material Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant

R290 1.9 Oz (0.055 kg)

Energy Consumption

1.820 kWh/24h

Compressor Power

1/3 HP

Condenser

Finless (low maintenance)

Thermostat setting default

Cut-Out
32°F (0°C)

Cut-In
44.6°F (7°C)

ELECTRICAL DATA

Power supply

115V/60 Hz

AMPS

7.0 A

Lighting

302.6 Lux Output
9 modules
8 LED per module

Plug Type

NEMA 5-15P

Controller

CIR

Cord length

128" (3270 mm)

LOGISTIC DATA

Trailer Loads

53': 66

Unit weight with packaging

240.5 lb 109.1 kg

without packaging

223.7 lb 101.5 kg

Dimensions w/packaging

H: 78 7/10" 200 cm

W: 29 1/2" 75 cm

D: 29 1/2" 75 cm

Customer service and warranty

Three year limited warranty, includes parts and labor.

An additional two year warranty is issued on the compressor (USA & Canada only).

Operators must follow installation and operational guidelines per Imbera Users Manual.

Each cooler must be connected directly to a single power supply, otherwise warranty will be voided.

Customer service: 866.548.5770

*Energy consumption based on ANSI/ASHRAE Standard 72-2005

*BMAD System (Low maintenance high performance)

*Dimensions rounded up to the nearest inch or centimeter

*Specifications subject to change without notice

*H: Height, W: Width, D: Depth

02/05/21