



VERTICAL COOLER EVC1.5

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

Our most compact counter model, ideal for promotions and new product launches. Increases impulse sales and brand visibility at the point of sale.



KEY FEATURES




ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.



TECHNICAL SPECIFICATIONS

Exterior dimensions Internal dimensions Usable interior capacity

H: 27 7/10" (70cm)	H: 23 3/5" (60cm)	H: 23 1/5" (59cm)
W: 14" (36cm)	W: 11" (28cm)	W: 9 2/5" (24cm)
D: 19" (48cm)	D: 12 3/10" (31cm)	D: 10 4/5" (27cm)

Usable volume	1.36 ft ³ (38.64 lts)
Doors	1
Door construction	Plastic frame
Shelves	3
Shelf size	W: 9 9/10" (25cm) D: 11" (28cm)
External material	Pre-painted steel
Internal material	Pre-painted steel

DATA CAPACITY**

591 ml (20 oz) bottle capacity

Total: 18

Front: 3

Display: 6

355 ml (12 oz) can capacity

Total: 36

Front: 6

Display: 12

REFRIGERATION PERFORMANCE DATA

Refrigerant	R600 1.2oz (0.035 kg)
Energy consumption	0.450 kwh / 24 h
Compressor power	1/12 HP 157 watts
Condenser	Finless
Thermostat setting default	Cut-out 32°F (0°C) Cut-in 44.6°F (7°C)

ELECTRICAL DATA


Power supply	115V / 60 Hz
Amps	1.1
Length of cord	125" (320cm)
Lighting	2 modules 12 total LED's
Plug type 	NEMA 5-15P
Controller	ETC1H

LOGISTIC DATA


Trailer loads	20': 96 40': 200 53': 284
Unit weight w/packaging	74.3 lb (33.70kg)
Dimensions w/packaging	H: 33 3/10" (85cm) W: 17 2/5" (44cm) D: 23 7/10" (60cm)

PRODUCT VIEWS


Front view

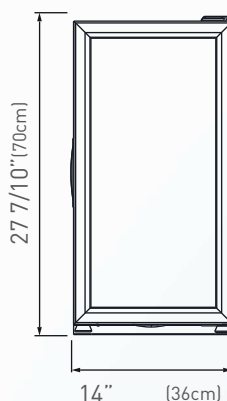

Side view

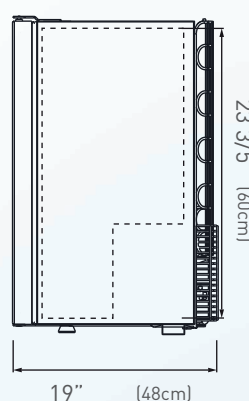

Top view



*Energy consumption based on C condition

*PA System (Active Walls)

*Dimensions rounded up to the nearest inch or millimeter

*Specifications subject to change without notice

*H: Height, W: Width, D: Depth

**Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual

Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

29/09/2020