

RackStar® 44

Rack Conveyor Dishwasher

Standard Features

- WISR® cleaning system
- Built-in booster heater 70 °F (38.9 °C) rise
- Self-cleaning wash arms
- Adjustable rinse system
 - Econo uses 0.38 gallons per rack
 - Turbo uses 0.65 gallons per rack
- Rainbow Rinse™ with arched rinse arm design
- Automatic tank fill
- Digital LED display
- Delime cycle
- 19 3/4" (502 mm) vertical chamber clearance
- Adjustable vent cowl collars
- Exclusive EnergyGuard™ controls
- Hinged doors provide large front access for ease of cleaning and maintenance
- Double-wall insulated doors retain heat, keeping the wash water hot and generating less heat in the dishroom
- Stainless steel strainer pans
- Splash shields
- Strike plate table limit switch
- Self-draining stainless steel wash pump
- Vent fan control shuts vent fan off when machine is idle
- Stainless steel front dress panel
- Durable stainless steel construction

Options & Accessories

- | | |
|--|--|
| ➤ 460V Electrical | ➤ Security Package |
| ➤ Higher than Standard Hood (25") | ➤ Scaltrol |
| ➤ Single Phase | ➤ Replacement Cartridge for Scaltrol |
| ➤ Single Point Connection with Onboard Booster | ➤ 36-Compartment Rack 4-1/8" tall (105 mm) |
| ➤ Steam Booster Heater | ➤ 5-5/8" tall (143 mm) |
| ➤ No Booster Option¹ | ➤ 7" tall (178 mm) |
| ➤ Drain Water Tempering Kit² | ➤ Combination Rack |
| ➤ Water Hammer Arrestor | ➤ Peg Rack |
| ➤ Pressure Regulator | ➤ Sheet Pan Rack |
| ➤ Flanged Feet | |



RackStar® 44

Specification Statement

Specified unit will be a Jackson RackStar 44 high temperature sanitizing rack conveyor dishwasher, rated by ETL Sanitation to NSF/ANSI Standard 3. Unit will be ENERGY STAR® certified. Unit to be rated for 224 racks per hour, with adjustable rinse system featuring Econo Rinse using 0.38 gallons per rack and Turbo Rinse using 0.65 gallons per rack. Unit includes WISR® cleaning system with self-cleaning wash arms, Rainbow Rinse™ with arched rinse arm design, and built-in 24kW 70°F rise booster heater. Features include digital LED display, EnergyGuard™ controls, 19 3/4" vertical chamber clearance, automatic tank fill, hinged double-wall insulated doors, self-draining 3.0 HP stainless steel wash pump motor, and vent fan control. Constructed of durable stainless steel with available flanged feet option.

1-year parts and labor warranty.

Mandatory Specs

- Voltage _____
- Tank Heat
 - ☐ Electric
 - ☐ Steam
- Direction of Operation
 - ☐ Left to Right
 - ☐ Right to Left




Less Water. Jackson maintains one of the lowest water usages in the conveyor class with the RackStar. The RackStar delivers superior results, using only 0.38 gallons of water per rack.

Less Chemicals. Lowering water usage also reduces the amount of chemicals required in each cycle, saving the operator on chemical costs. The RackStar provides one-pass cleaning, which also minimizes chemical usage by getting the ware *Clean the First Time*®.


Less Energy. By using less water, the RackStar utilizes smaller tank and booster heaters, which lowers overall energy costs for years to come. In addition, the insulated doors retain heat, keeping wash water hot and generating less heat in the dish room.



PRODUCT	RACKS/HOUR	GALLONS/RACK	GALLONS/HOUR	BOOSTER HEATER 70 °F
Brand H	202	0.45	91	18kW
Brand C	209	0.48	100	21kW
Brand S	223	0.65	145	24kW
RackStar	224	0.38	85	24kW



Dual Pawl Bar provides easier access to scrap baskets and better balance to the rack as it is conveyed through the machine.



Adjustable Rinse
Econo Rinse uses only 0.38 gallons per rack and is suitable for normal operations. Turbo Rinse uses 0.65 gallons per rack and is ideal for heavier soiled loads.



Hinged Doors provide easy access into the wash chamber for cleaning and maintenance.



Digital LED Controls are easy to read and feature an LED display that communicates temperature, status, and cycle selection.

Electric Right to Left




LEGEND

A - Electrical Connection
B - Main Water Inlet
(1/2" NPT, 110 °F MIN (24 kW Booster),
or 180 °F MIN (No Booster)
C - Drain Connection
(1 1/2" NPT)
D - Vent Connections
(Including Dampers)

— — — — — - Open Door
- - - - - - - - - - High Hood Option

All dimensions from the floor can be increased
1 3/4" using the machine's adjustable feet.

Items in red are not supplied with the machine.

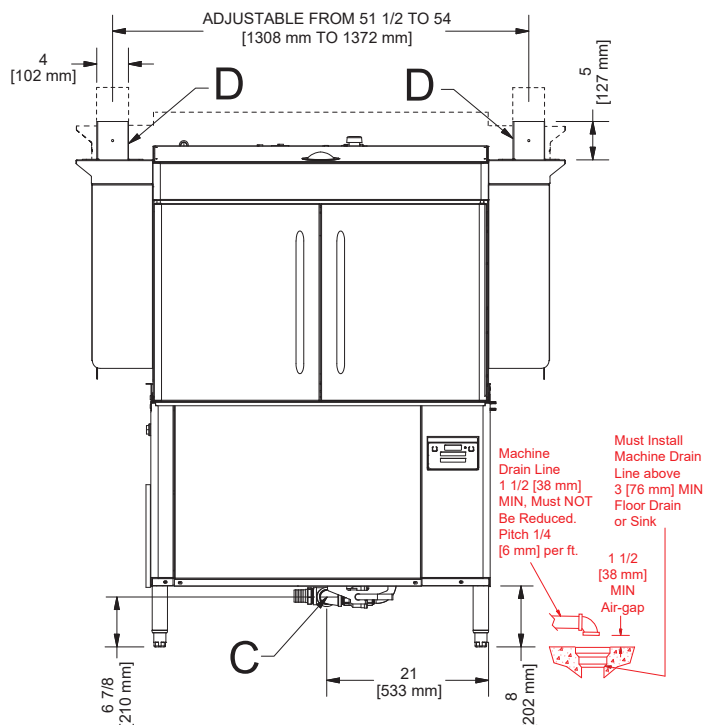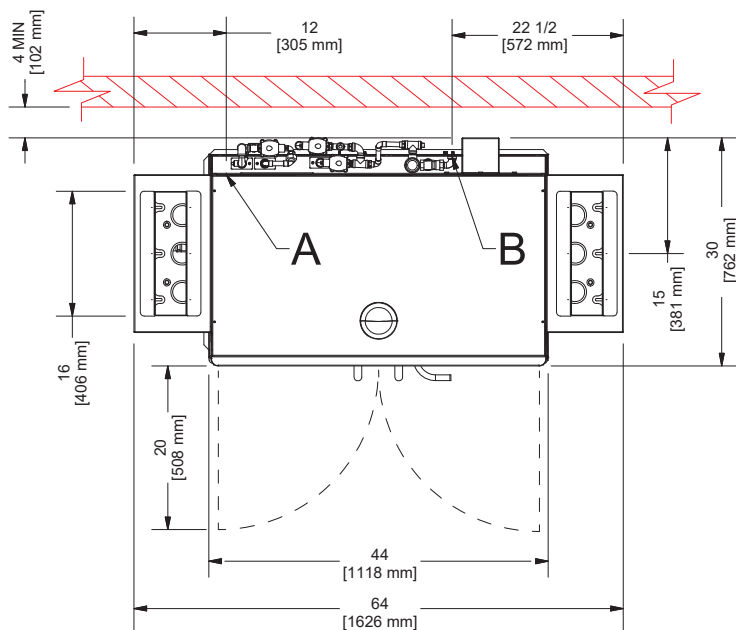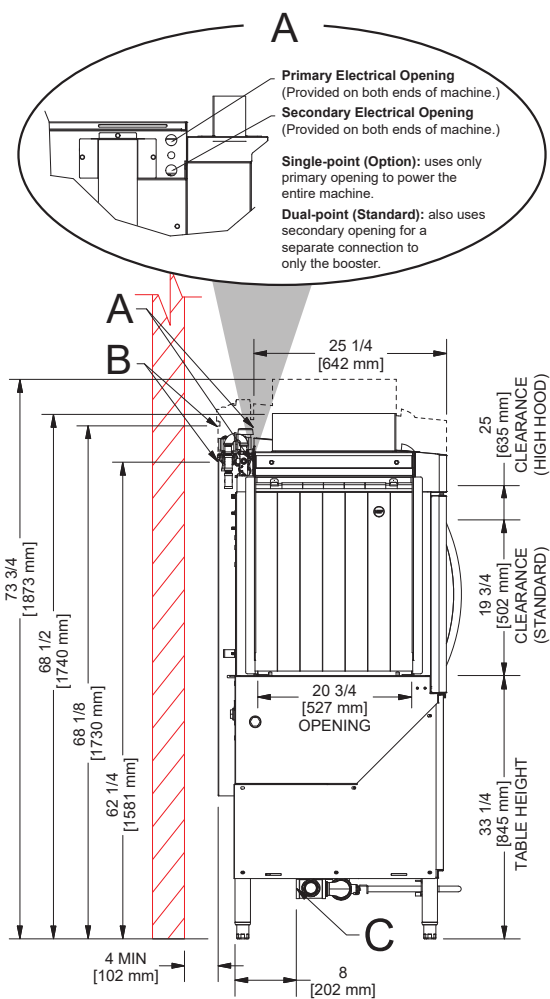




Electric Left to Right

LEGEND

- A - Electrical Connection
 B - Main Water Inlet
 (1/2" NPT, 110 °F MIN (24 kW Booster),
 or 180 °F MIN (No Booster)
 C - Drain Connection
 (1 1/2" NPT)
 D - Vent Connections
 (Including Dampers)
 — — — — — - Open Door
 - - - - - - - High Hood Option

All dimensions from the floor can be increased
 1 3/4" using the machine's adjustable feet.

Items in red are not supplied with the machine.

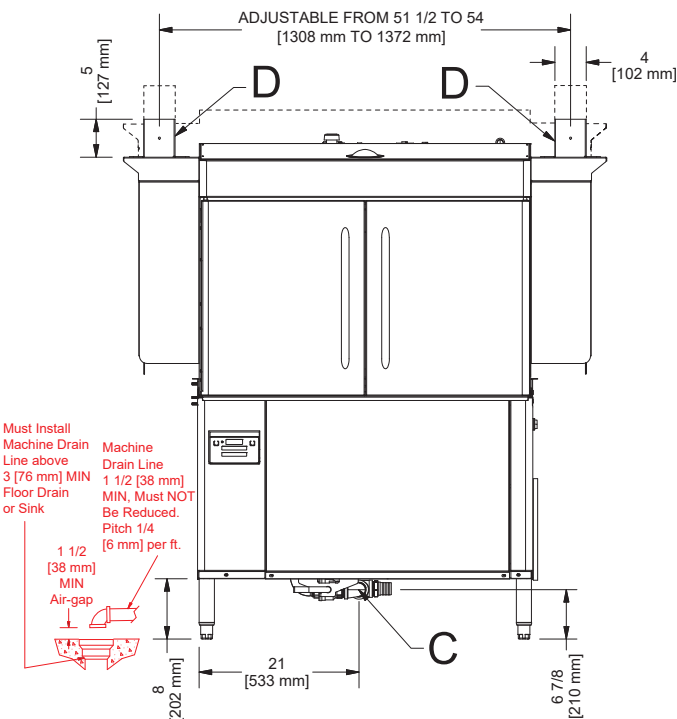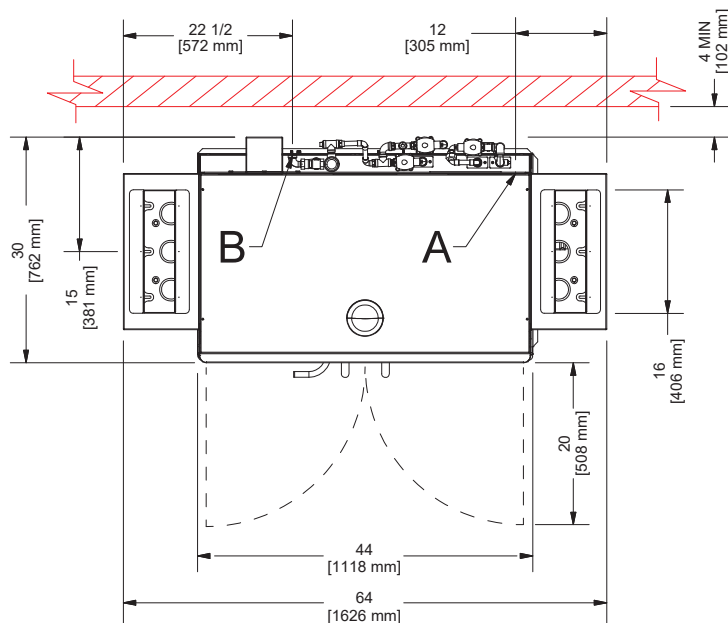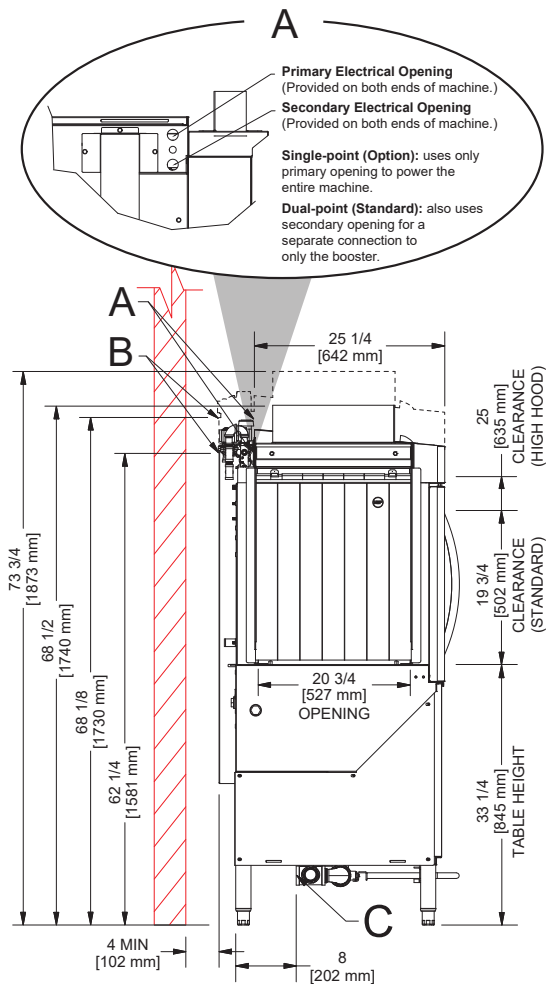

Steam Right to Left

LEGEND




- A - Electrical Connection
- B - Main Water Inlet
(180 °F MIN, Supplied from Steam Booster)
- C - Drain Connection
(1 1/2" NPT)
- D - Vent Connections
(Including Dampers)
- E - Steam Connection
(3/4" NPT)

— — — — — Open Door

- - - - - High Hood Option

All dimensions from the floor can be increased
1 3/4" using the machine's adjustable feet.

Items in red are not supplied with the machine.

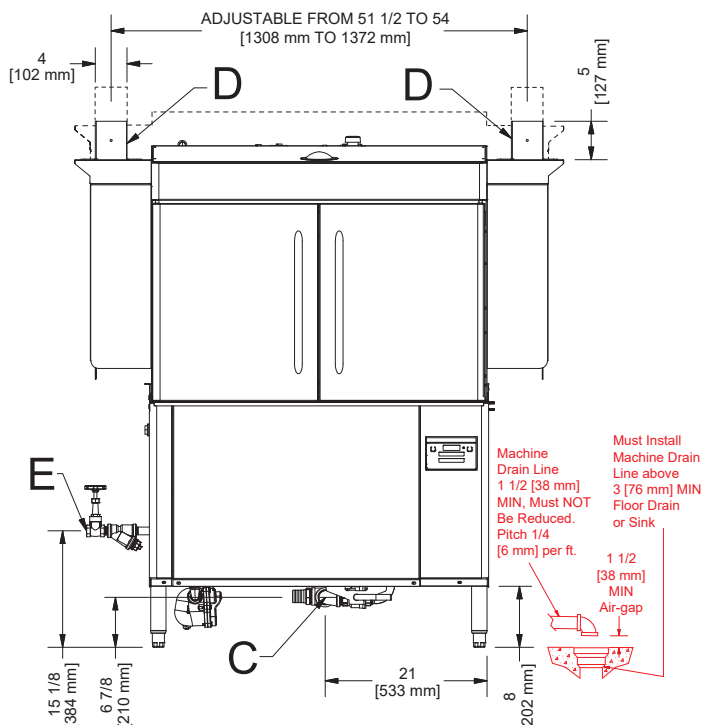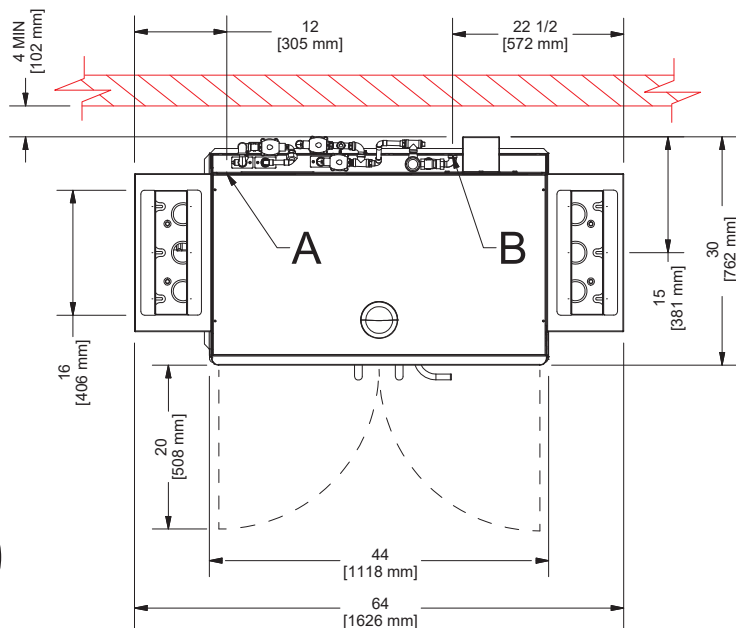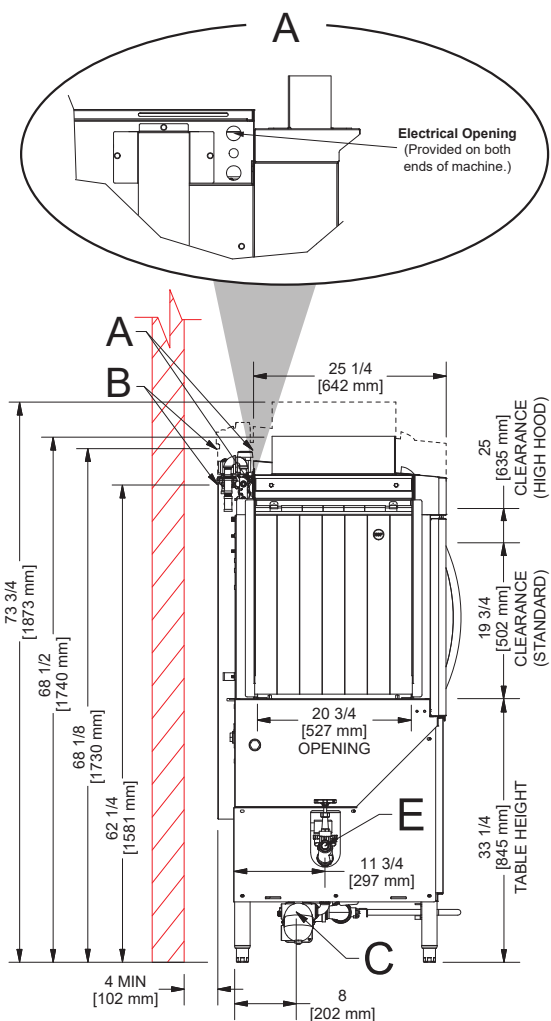

Steam Left to Right

LEGEND





- A - Electrical Connection
- B - Main Water Inlet
(180 °F MIN, Supplied from Steam Booster)
- C - Drain Connection
(1 1/2" NPT)
- D - Vent Connections
(Including Dampers)
- E - Steam Connection
(3/4" NPT)

— — — — — - Open Door

- - - - - - - - - - - High Hood Option

All dimensions from the floor can be increased
1 3/4" using the machine's adjustable feet.

Items in red are not supplied with the machine.

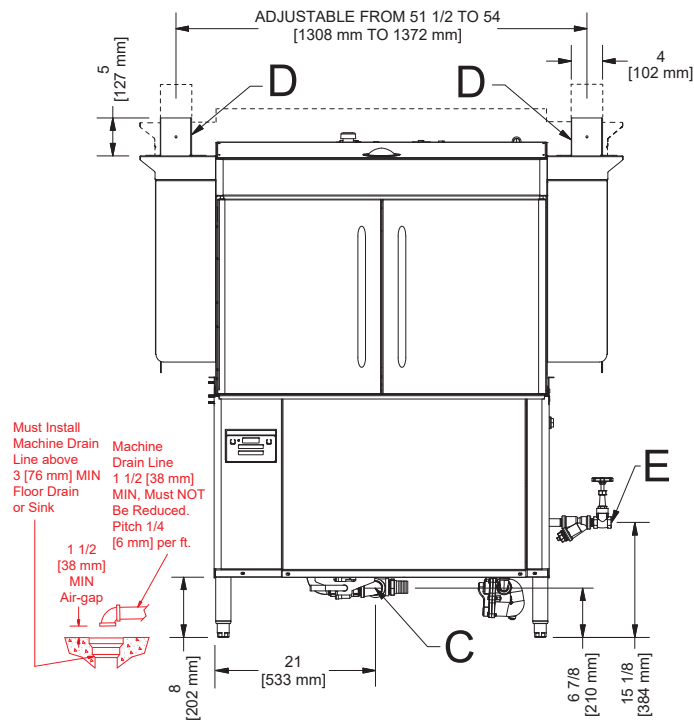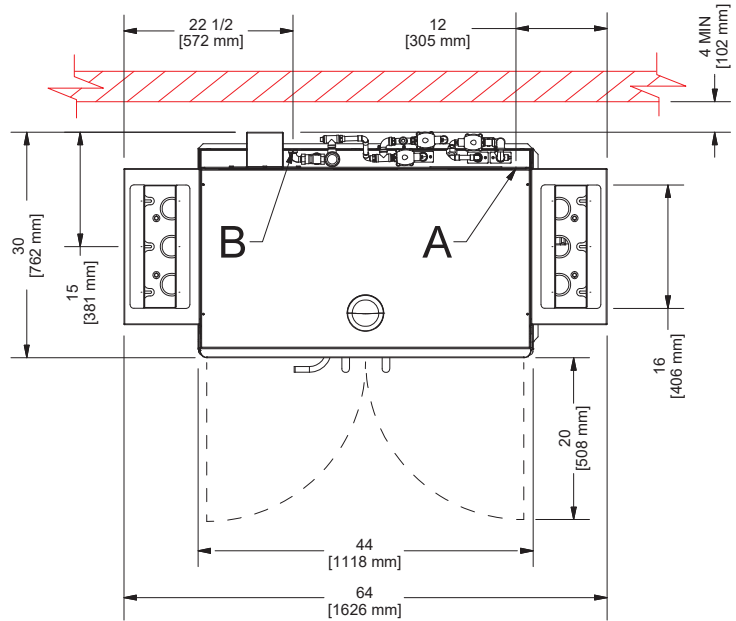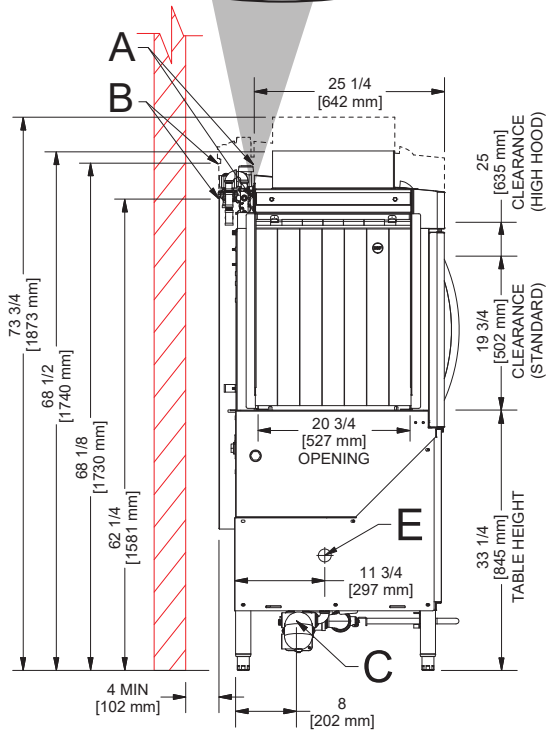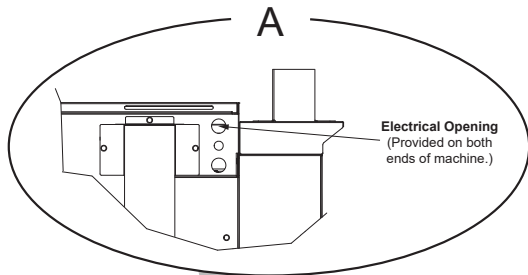

RECOMMENDED TABLE FABRICATION


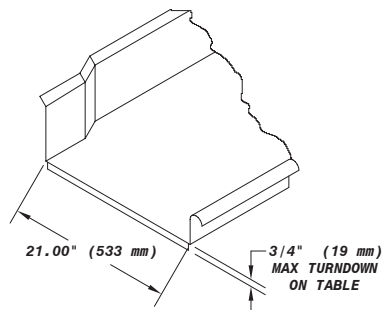


TABLE CONNECTION

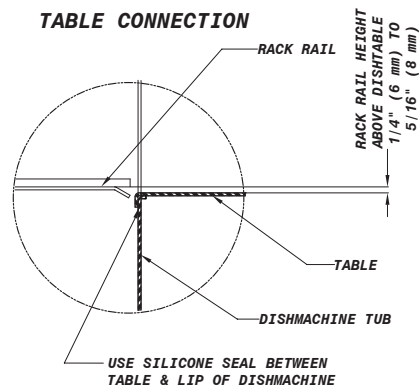

Operating Capacity

| | |
|------------------|-------|
| Racks per Hour | 224 |
| Dishes per Hour | 5,600 |
| Glasses per Hour | 8,064 |

Operating Speed

| | |
|----------------------------------|-----------------|
| Conveyor Speed (feet per minute) | 6.10 (1.86 MPM) |
|----------------------------------|-----------------|

Operating Temperature

| | |
|-----------------------------|----------------|
| Wash Temperature (minimum) | 160 °F (71 °C) |
| Rinse Temperature (minimum) | 180 °F (82 °C) |

Water Consumption

| | |
|-------------------------------|---------------------|
| Gallons per Rack | |
| Econo Rinse | 0.38 (1.4 L) |
| Turbo Rinse | 0.65 (2.5 L) |
| Gallons per Hour | |
| Econo Rinse | 85.12 (322.2 L) |
| Turbo Rinse | 145.60 (551.2 L) |
| Wash Tank Capacity (gallons) | |
| 70 °F Rise Booster (standard) | 24.00 (90.8 L) |
| No Booster | 27.21 (103.0 L) |
| Wash Pump Capacity | 270 GPM (1,022 LPM) |

Water Requirements

| | |
|---------------------------------|----------------|
| Incoming Water Temperature | |
| 70 °F Rise Booster | 110 °F (43 °C) |
| No Booster | 180 °F (82 °C) |
| Flow Pressure (PSI) | 20 ± 2 |
| Incoming Water Connection (NPT) | 1/2" |
| Drain Connection (NPT) | 1 1/2" |

Electrical Specifications

| | |
|------------------------|------|
| Wash Pump Motor (HP) | 3.0 |
| Drive Motor (HP) | 1/4 |
| Wash Tank Heater (kW) | 15.0 |
| Rinse Tank Heater (kW) | 24.0 |

Steam Specifications

| | |
|-------------------------------|-------|
| Steam Connection (NPT) | 3/4" |
| Steam Flow Pressure (PSI) | 10-30 |
| Consumption @ 15 PSI (lbs/hr) | 60 |

Venting Requirements (CFM)

| | |
|------------|-----|
| Input End | 200 |
| Output End | 200 |
| Total | 400 |

Dimensions

| | |
|-------------------------|-------------------|
| Width | 64" (1626 mm) |
| Depth | 30" (762 mm) |
| Depth with Door Open | 50" (1270 mm) |
| Height | |
| Standard | 68 1/2" (1740 mm) |
| High Hood | 73 3/4" (1873 mm) |
| Inside Clearance Height | |
| Standard | 19 3/4" (502 mm) |
| High Hood | 25" (635 mm) |
| Wall Clearance | 4" (102 mm) |
| Drain Height | 6 7/8" (175 mm) |
| Weight | |
| Standard | 727 lbs (330 kg) |
| High Hood | 737 lbs (334 kg) |

Shipping Details

| | |
|-----------------|-------------------|
| Shipping Weight | |
| Standard | 802 lbs (1364 kg) |
| High Hood | 812 lbs (368 kg) |
| Shipping Width | 76" (1930 mm) |
| Shipping Depth | 40" (1016 mm) |
| Shipping Height | 75" (1905 mm) |
| Shipping Cube | 131.94 cu ft |
| Shipping Class | 150 |

Single Point Connection

| Power Supply | Total Load | Minimum Circuit Ampacity | Maximum Overcurrent Protection |
|--------------------------------------|------------|--------------------------|--------------------------------|
| WITH 24kW/70 °F RISE ONBOARD BOOSTER | | | |
| 208/60/3 | 118.6 A | 120.9 A | 130.0 A |
| 230/60/3 | 99.6 A | 101.8 A | 110.0 A |
| 460/60/3 | 50.0 A | 51.1 A | 55.0 A |
| 208/60/1 | 202.4 A | 205.8 A | 215.0 A |
| 230/60/1 | 169.1 A | 172.1 A | 180.0 A |
| WITH NO BOOSTER* | | | |
| 208/60/3 | 51.9 A | 54.2 A | 60.0 A |
| 230/30/3 | 44.3 A | 46.4 A | 55.0 A |
| 460/60/3 | 22.3 A | 23.4 A | 25.0 A |
| 208/60/1 | 87.0 A | 90.4 A | 100.0 A |
| 230/60/1 | 73.2 A | 76.3 A | 85.0 A |
| STEAM TANK HEAT | | | |
| 208/60/3 | 10.3 A | 12.6 A | 20.0 A |
| 230/30/3 | 9.7 A | 11.9 A | 20.0 A |
| 460/60/3 | 5.0 A | 6.1 A | 15.0 A |
| 208/60/1 | 14.9 A | 18.3 A | 30.0 A |
| 230/60/1 | 13.4 A | 16.4 A | 25.0 A |

*RackStar 44 units with electric tank heat sold without booster heaters are not ENERGY STAR® certified.

Dual Point Connection

| Power Supply | Total Load | Minimum Circuit Ampacity | Maximum Overcurrent Protection |
|--------------------------------------|------------|--------------------------|--------------------------------|
| WITH 24kW/70 °F RISE ONBOARD BOOSTER | | | |
| 208/60/3 Unit | 51.9 A | 54.2 A | 60.0 A |
| 208/60/3 Booster | 66.6 A | 67.9 A | 70.0 A |
| 230/60/3 Unit | 44.3 A | 46.4 A | 50.0 A |
| 230/60/3 Booster | 55.3 A | 56.6 A | 60.0 A |
| 460/60/3 Unit | 22.3 A | 23.4 A | 25.0 A |
| 460/60/3 Booster | 27.7 A | 29.0 A | 30.0 A |
| 208/60/1 Unit | 87.0 A | 90.4 A | 100.0 A |
| 208/60/1 Booster | 115.4 A | 116.7 A | 120.0 A |
| 230/60/1 Unit | 73.3 A | 76.3 A | 85.0 A |
| 230/60/1 Booster | 95.8 A | 97.1 A | 100.0 A |

Advisory: Jackson WWS, Inc. DOES NOT endorse "Tankless On-Demand" water heaters for use with our dishmachines. Jackson WWS, Inc. DOES endorse, and highly recommends, standard "tank" style water heaters, sized to properly handle the water heating requirements of the facility.

CONTACT JACKSON

07610-004-34-33 [07/21/25]

Address

 6209 N U.S. Highway 25E
 Gray, Kentucky 40734

Website

www.jacksonwws.com

Telephone & Fax

 T 888.800.5672
 F 606.523.1799

Email

customer.service@jacksonwws.com


@JACKSONWWS



JACKSON WWS



JACKSON WAREWASHING SYSTEMS



@JACKSONWAREWASHING